



ALBRECHT
Germany

ALB

Better
Albrecht

Albrecht.

**We lead
tools
to max
performance.**



Maximize your work

**Highest metal
removal rate.
Adaptive cooling
ring 10-30°.
Safety of processing
with Pin-Lock.**

Ultra metal removal rate.
Ultra-Gripping.
Ultra-Dampening.
Ultra-Safe due to Pin-Lock.
In addition peripheral cooling which
adapts perfectly to every task.

Up to 33.000 rpm.
Runout $\leq 3 \mu\text{m}$.
Cooling-Ring 10-30°.

Albrecht Ultra – The basis for
record-setting.



Reach the peak

**The Albrecht Micro.
Made for the
smallest and finest
surfaces. Range
1 - 6 Millimeter.**

Ideal for microtools.
Clamping range 1 - 6 mm.
Peripheral or internal cooling.
Significantly better dampening
in comparison to Shrink Chucks.
Slim shape D1=13,5 mm.
Perfect runout $\leq 3 \mu\text{m}$ 2,5xD.
Up to 40.000 1/min $\leq 1 \text{ gmm}$.

For the finest surfaces even for
difficulty accessible areas.
Special coated collets.
Maintenance-free.
The Albrecht Micro.
None is more fine.

The Slim5

The power for 5-axis operation. Achieve anything safely and with speed.

Clamping range 2-14 mm or 2-20 mm.
Slim Front, gage length= 120 – 178 mm (HSK63).
No tool pull-out due to pin-lock collets.
Extremely slim tapered, 4,5°.
High accuracy and dampening.
Optimal power transmission.
100% leak proof and up to 100 bars also with internal coolant supply for the tools.
Ultimate additional cooling and rinsing effect due to peripheral cooling.



An APC from Albrecht

At present APC is the best performing chuck worldwide in the area of speed, tool life and safety.

HSK50, HSK63, HSK80, HSK100, HSK125, SK30, SK40, SK50, BT30, BT40, BT50, PSC50, PSC63, PSC80, BT40 and BT50 with additional face contact.



Winner in Speed.

1. Albrecht APC 400 mm

2. Hydraulic 320 mm

4. Shrink Fit 280 mm

3. Weldon 300 mm

00:23

On this photo finish the production speed of 4 chuck technologies is being compared. The machine, the milling cutter D=16 mm

and the material are identical for all 4 milling operations. We call out to any sceptic: come to the race! Albrecht APC.

Winner in Lifetime.



Weldon
One-sided
wear
Out!






Shrink Fit
Big
nicks
Stop!



Hydraulic
Micro
nicks
Limited!



Albrecht APC
Minimal
rounding
**Good
Continue!**

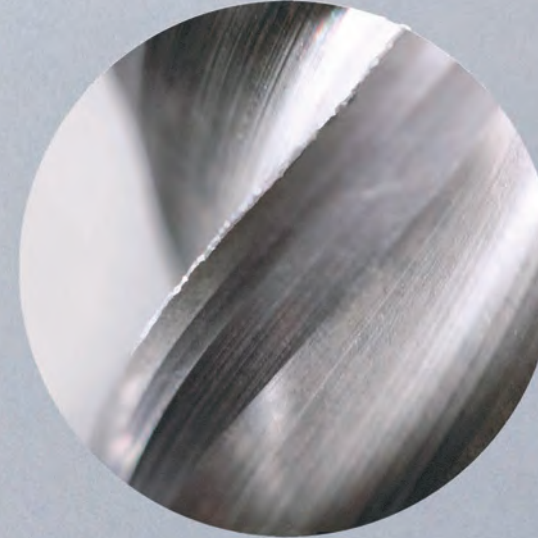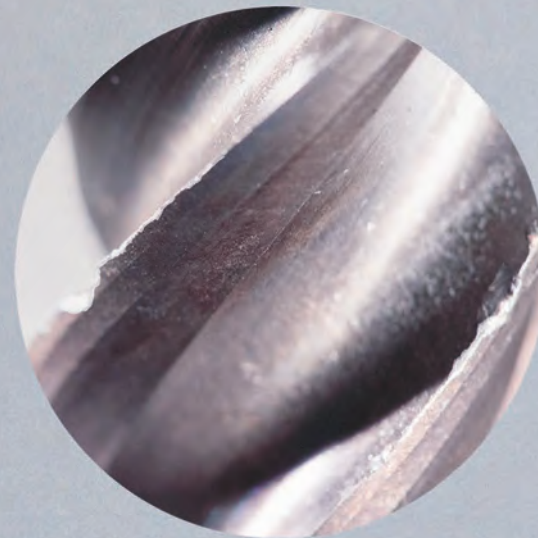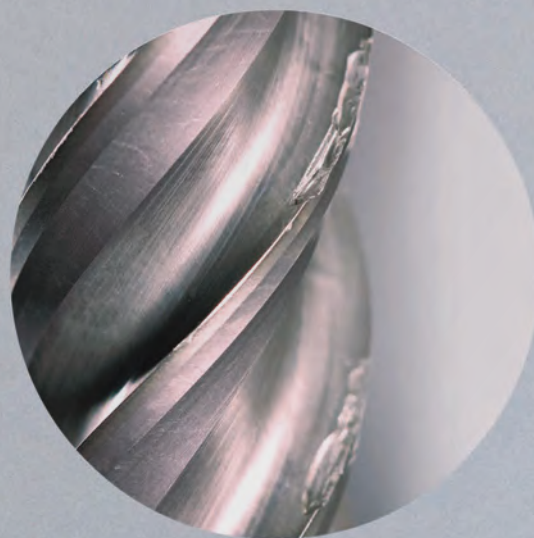

This comparison shows the influence the chuck has on the life of your cutting tool. The test milling cutter is a 4-blades tool, D=16 mm, with identical material, machine and parameters. The tool life advantage in the Albrecht APC chuck can clearly be attributed to the excellent vibration dampening and highly precise accuracy of this precision chuck. We ask you to value your economic advantages yourself.

Winner in Safety.

100%

Weldon Holds

The most common solution. The mill is fixed with a side lock screw. Solid fixation. No dampening. Run-out not so good.

Hydraulic Possible pull-out

The mill is held by an inner membrane. This “soft” technology might enable the mill “to be levered out” especially by lateral forces.

Shrink Fit Possible pull-out

Clamping very rigid. Thus, vibrations might loosen the mill from the chuck. The clamping torque is dependent on the tolerances of tool shaft.

Albrecht APC Holds


Strong clamping force due to the assemblage of collet and taper. Available also with Pin-Lock engaged to Weldon slot which acts as an additional safe-guard for the mill. This we guarantee!

These wins have reasons.

1. The world's only Milling Chuck with 1:16 worm gear.

Patent no. 1206990.
The only way how 100% holding force gets to the cutting tool.

2. Highest rigidity thanks to design and body.

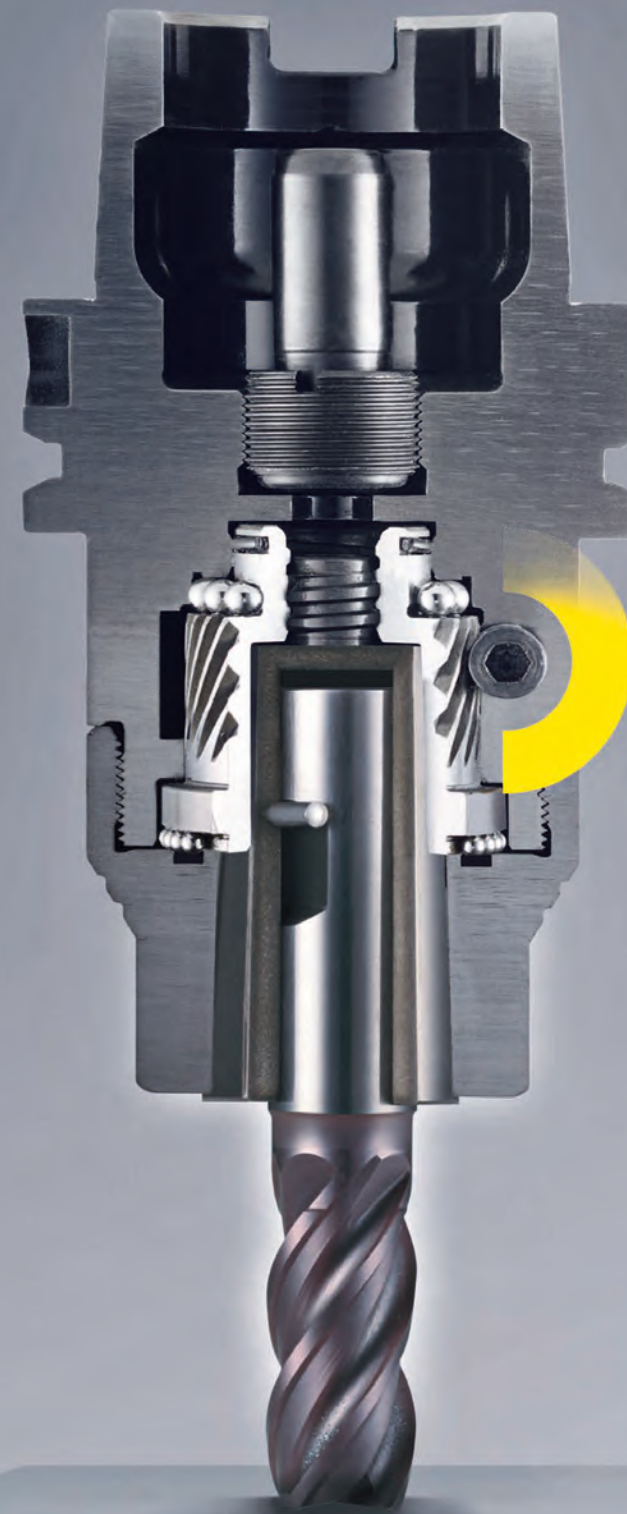


3. The worm gear with 3 tons traction force and the collet with a slow-taper angle of 1,25° do guide the tool perfectly through trochoidal-, dry- and hard-machining operations up to 110° C.

4. Ideal dampening. The collet-cone assemblage absorbs virtually all vibrations. Measuring portfolio from Institut for Produktionsmanagement and University of Technology Hamburg see page 86–87

HSK

Precision Chuck APC, DIN 69893 (ISO 12164) with fine balancing holes 6xM6

Easy exchange of tools by setting of hex-key (see page 45). Maintenance free.
Sealed against coolant and contamination. Slow collet taper angle. Collet
with special coating (see page 32–34). System-Runout-Accuracy 3 µm at 2,5 x D.
Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.
Coolant tubes see page 79.

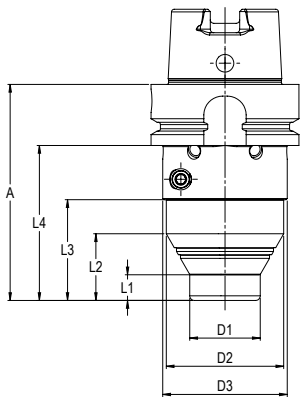

APC 14

HSK50 A												2 – 14 mm
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg	
101	300 014Z 650 0	A	11	28	43	75	30	50	53	20.000 G=2,5	1,1	
HSK63 A												
92	300 014Z 663 0	A	11	28	43	66	30	50	53	20.000 G=2,5	1,3	

HSK50 A												2 – 14 mm
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg	
187	300 214Z 650 0	A	85	103	142	161	30	50	53	20.000 G=2,5	1,9	
HSK63 A												
142	300 514Z 663 0	A	61	78	93	116	30	50	53	20.000 G=2,5	1,5	
178	300 214Z 663 0	A	85	103	129	152	30	50	53	20.000 G=2,5	1,9	

APC 20

HSK50 A												2 – 20 mm
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg	
101	300 120Z 650 0	A	20	31	56	75	40	53		20.000 G=2,5	1,1	
HSK63 A												
92	300 120Z 663 0	A	20	31		66	40	53		20.000 G=2,5	1,3	
HSK63 F												
92	300 120F 663 0*	F	20	31		66	40	53		20.000 G=2,5	1,3	
HSK80 A												
98	300 120Z 680 0	A	18	38		72	40	63		20.000 G=2,5	1,8	
HSK100 A												
100	300 020Z 610 0	A	18	38	43	71	40	63	70	20.000 G=2,5	3,8	

*Delivery includes sealing plug in HSK

HSK63 A												2 – 20 mm
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg	
142	300 520Z 663 0	A	69	81		116	40	53		20.000 G=2,5	1,7	
178	300 220Z 663 0	A	94	105		152	40	53		20.000 G=2,5	2,0	
HSK100 A												
150	300 820Z 610 0	A	48	68	93	121	40	63	70	20.000 G=2,5	4,2	
186	300 920Z 610 0	A	84	104	129	157	40	63	70	20.000 G=2,5	4,5	



APC 25


HSK63 A												16 – 32 mm
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg	
132	300 025Z 663 0	A	90	106			63			20.000 G=2,5	2,2	
HSK80 A												
137	300 025Z 680 0	A	111				63			20.000 G=2,5	2,5	
HSK100 A												
139	300 025Z 610 0	A	110				70			20.000 G=2,5	4,7	
HSK125 A												
145	300 025Z 612 0	A	116				70			20.000 G=2,5	6,0	



Slim5

Precision Chuck APC, DIN 69893 (ISO 12164) with fine balancing holes 6xM6

Slim line with 4,5° especially for 5-axis operations. Easy exchange of tools by setting of
hex-key (see page 45). Maintenance free. Sealed against coolant and contamination.
Slow collet taper angle. Collet with special coating (see page 32–34). System-Runout-
Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and
DIN 6535 HB, HA. Coolant tubes see page 79.

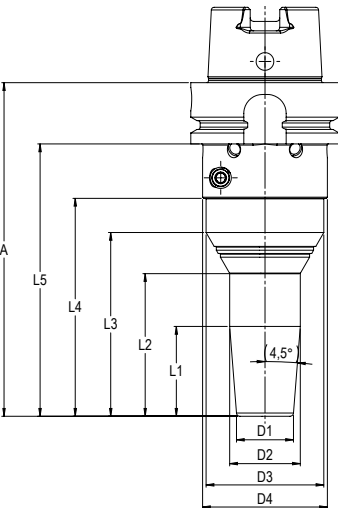

APC 14 Slim5

HSK63 A Slim5												2 – 14 mm	
A	Part.No.	Form	L1	L2	L3	L4	L5	D1	D2	D3	D4	Balanced	kg
120	300 414Z 663 0	A		38	56	71	94	24	30	50	53	20.000 G=2,5	1,4
142	300 414Z 663 1	A	38	61	78	93	116	24	30	50	53	20.000 G=2,5	1,5
178	300 414Z 663 2	A	38	85	103	129	152	24	30	50	53	20.000 G=2,5	1,8



APC 20 Slim5


HSK63 A Slim5												2 – 20 mm	
A	Part.No.	Form	L1	L2	L3	L4	L5	D1	D2	D3	D4	Balanced	kg
120	300 420Z 663 0	A		44	54	71	94	32	39	50	53	20.000 G=2,5	1,5
142	300 420Z 663 1	A	51	69	78	93	116	32	40	50	53	20.000 G=2,5	1,6
178	300 420Z 663 2	A	51	94	103	129	152	32	40	50	53	20.000 G=2,5	2,1



SK

Precision Chuck APC, ISO 7388-1 (DIN 69871)

Easy exchange of tools by setting of hex-key (see page 45). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 32 –34). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

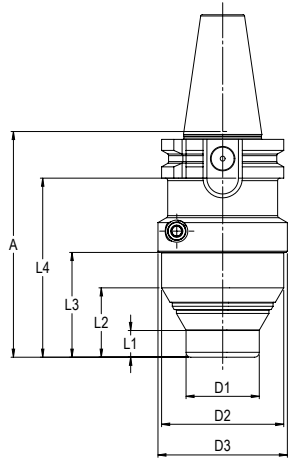

APC 14

SK30 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
92	300 014Z 230 0	A/AD	11	28	43	73	30	50	53	20.000 G=2,5	1,0

SK40											
63	300 014Z 240 0	A/AD	11	28		43	30	50		20.000 G=2,5	1,1

SK30 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
142	300 514Z 230 0	A/AD	61	78	93	123	30	50	53	20.000 G=2,5	1,4

SK40											
112	300 514Z 240 0	A/AD	61	78		93	30	50		20.000 G=2,5	1,3
149	300 914Z 240 0	A/AD	85	103		129	30	50		20.000 G=2,5	1,7

APC 20

SK30 2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
92	300 120Z 230 0	A/AD	20	28		73	40	53		20.000 G=2,5	1,1

SK40											
63	300 020Z 240 0	A/AD	20	28		43	40	50		20.000 G=2,5	1,1

SK50											
62	300 020Z 250 0	A/AD	18	38		43	40	63		20.000 G=2,5	3,1

SK40 2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
112	300 520Z 240 0	A/AD	69	78		93	40	50		20.000 G=2,5	1,6

149	300 920Z 240 0	A/AD	94	103		129	40	50		20.000 G=2,5	1,9

SK50											
112	300 820Z 250 0	A/AD	48	68		93	40	63		20.000 G=2,5	3,5
149	300 920Z 250 0	A/AD	84	104		129	40	63		20.000 G=2,5	3,8

APC 25

SK40 16 – 32 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
102	300 025Z 240 0	A/AD	*			83	63			20.000 G=2,5	2,1


SK50											
102	300 025Z 250 0	A/AD				83	70			20.000 G=2,5	4,3

* without Safety Zone, with Safety Zone see Part. No. 300 025Z 240 1 (on request).

Slim5

Precision Chuck APC, ISO 7388-1 (DIN 69871)

Slim line with 4,5° especially for 5-axis operations. Easy exchange of tools by setting of hex-key (see page 45). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 32–34). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

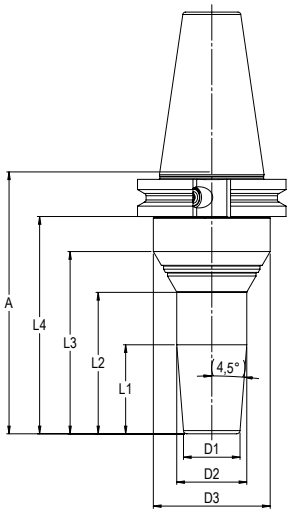

APC 14 Slim5

SK40 Slim5 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
91	300 414Z 240 0	A/AD		38	56	71	24	30	50	20.000 G=2,5	1,2

112	300 414Z 240 1	A/AD	38	61	78	93	24	30	50	20.000 G=2,5	1,3
149	300 414Z 240 2	A/AD	38	85	103	129	24	30	50	20.000 G=2,5	1,6

APC 20 Slim5

SK40 Slim5 2 – 20 mm


A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
91	300 420Z 240 0	A/AD		44	54	71	32	39	50	20.000 G=2,5	1,3

112	300 420Z 240 1	A/AD	51	69	78	93	32	40	50	20.000 G=2,5	1,4
149	300 420Z 240 2	A/AD	51	94	103	129	32	40	50	20.000 G=2,5	1,9

MAS-BT

Precision Chuck APC, ISO 7388-2 (JIS B 6339)

Easy exchange of tools by setting of hex-key (see page 45). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 32–34). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

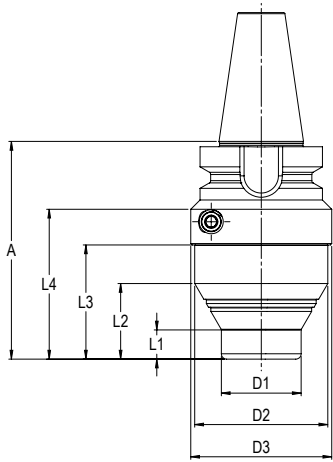

APC 14

BT30 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
82	300 014Z 430 0	A/AD	11	28	43	56	30	50	53	20.000 G=2,5	0,9

BT40	A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
70	300 014Z 440 0	A/AD	11	28			43	30	50		20.000 G=2,5	1,2

BT40 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
120	300 514Z 440 0	A/AD	61	78		93	30	50		20.000 G=2,5	1,5
156	300 914Z 440 0	A/AD	85	103		129	30	50		20.000 G=2,5	2,0

APC 20

BT30 2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
82	300 120Z 430 0	A/AD	20	31		56	40	53		20.000 G=2,5	0,9

BT40	A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
70	300 020Z 440 0	A/AD	18	38				40	63		20.000 G=2,5	1,4

BT50	A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
81	300 020Z 450 0	A/AD	18	38			43	40	63		20.000 G=2,5	4,2

BT40 2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
120	300 520Z 440 0	A/AD	48	68			40	63		20.000 G=2,5	1,8
156	300 920Z 440 0	A/AD	84	104			40	63		20.000 G=2,5	2,1

BT50	A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
131	300 820Z 450 0	A/AD	48	68			93	40	63		20.000 G=2,5	4,6
167	300 920Z 450 0	A/AD	84	104			129	40	63		20.000 G=2,5	4,9



APC 25

BT40 16 – 32 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
110	300 025Z 440 0	A/AD					63			20.000 G=2,5	2,4


BT50	A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
121	300 025Z 450 0	A/AD					83	70			20.000 G=2,5	4,6



Slim5

Precision Chuck APC, ISO 7388-2 (JIS B 6339)

Slim line with 4,5° especially for 5-axis operations. Easy exchange of tools by setting of hex-key (see page 45). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 32–34). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

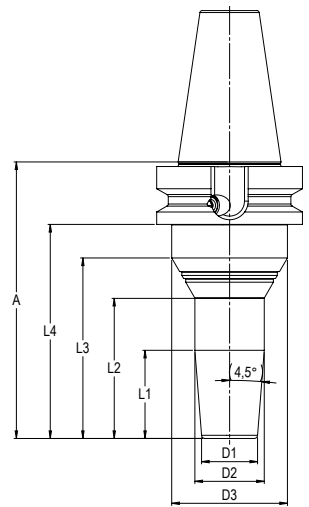

APC 14 Slim5

BT40 Slim5 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
98	300 414Z 440 0	A/AD		38	56	71	24	30	50	20.000 G=2,5	1,4

120	300 414Z 440 1	A/AD	38	61	78	93	24	30	50	20.000 G=2,5	1,5
157	300 414Z 440 2	A/AD	38	85	103	129	24	30	50	20.000 G=2,5	1,8



APC 20 Slim5

BT40 Slim5 2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
98	300 420Z 440 0	A/AD		44	54	71	32	39	50	20.000 G=2,5	1,5

120	300 420Z 440 1	A/AD	51	69	78	93	32	40	50	20.000 G=2,5	1,6
157	300 420Z 440 2	A/AD	51	94	103	129	32	40	50	20.000 G=2,5	2,0




Polygon

Precision Chuck APC, DIN ISO 26623-1 with fine balancing holes 6xM6

Easy exchange of tools by setting of hex-key (see page 45). Maintenance free.

Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 32–34). System-Runout-Accuracy 3 µm at 2,5 x D.

Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.



APC 14

PSC 63 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
80	300 014Z 9C6 0	A	11	28	43		30	50		20.000 G=2,5	1,3

PSC 50 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
127	300 514Z 9C5 0*	A	61	78	93		30	50	53	20.000 G=2,5	1,0

PSC 63											
130	300 814Z 9C6 0	A	61	78	93		30	50		20.000 G=2,5	1,5
166	300 914Z 9C6 0	A	85	103	129		30	50		20.000 G=2,5	2,0

* without balancing holes

APC 20

PSC 50 2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
78	300 120Z 9C5 0*	A	20	31			40	53		20.000 G=2,5	0,9

PSC 63											
80	300 020Z 9C6 0	A	18	38			40	63		20.000 G=2,5	1,4
PSC 80											
90	300 020Z 9C8 0	A	18	38	43		40	63		20.000 G=2,5	3,3

* without balancing holes

PSC 63 2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
130	300 820Z 9C6 0	A	47	68			40	63		20.000 G=2,5	1,6
166	300 920Z 9C6 0	A	84	104			40	63		20.000 G=2,5	2,2

PSC 80											
140	300 820Z 9C8 0	A	47	68	93		40	63		20.000 G=2,5	3,5



APC 25

PSC 63 16 – 32 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
119	300 025Z 9C6 0	A					63			20.000 G=2,5	2,4

PSC 80											
129	300 025Z 9C8 0	A	83				70			20.000 G=2,5	3,8




Slim5

Precision Chuck APC, DIN ISO 26623-1 with fine balancing holes 6xM6

Slim line with 4,5° especially for 5-axis operations. Easy exchange of tools by setting of hex-key (see page 45). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 32–34).

System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

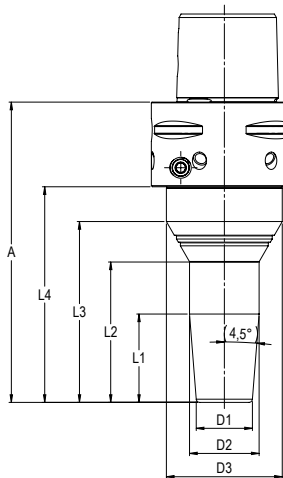

APC 14 Slim5

PSC 63 Slim5 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
108	300 414Z 9C6 0	A		38	56	71	24	30	50	20.000 G=2,5	1,5
130	300 414Z 9C6 1	A	38	61	78	93	24	30	50	20.000 G=2,5	1,6
166	300 414Z 9C6 2	A	38	85	103	129	24	30	50	20.000 G=2,5	1,9




APC 20 Slim5

PSC 63 Slim5 2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
108	300 420Z 9C6 0	A		44	54	71	32	39	50	20.000 G=2,5	1,6
130	300 420Z 9C6 1	A	51	69	78	93	32	40	50	20.000 G=2,5	1,7
166	300 420Z 9C6 2	A	51	94	103	129	32	40	50	20.000 G=2,5	2,1




Face Contact

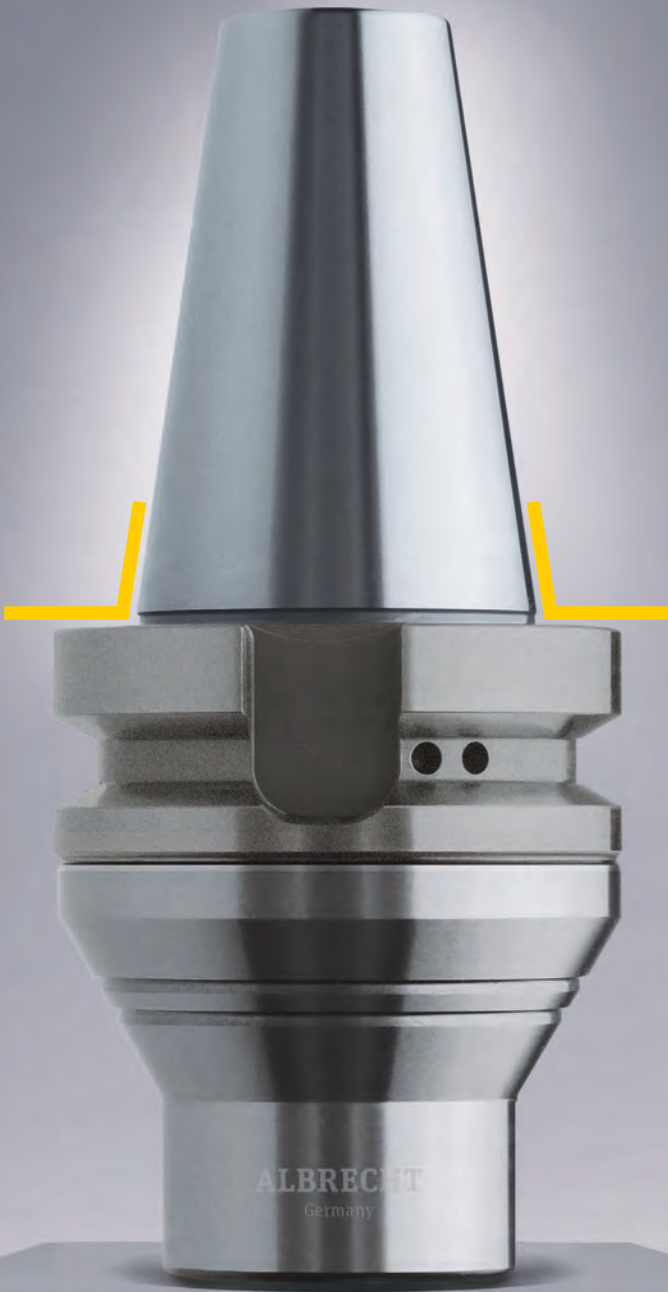

BT*

Precision Chuck APC, ISO 7388-2 with additional Flange contact.
Easy exchange of tools by setting of hex-key (see page 45). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page32–34). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

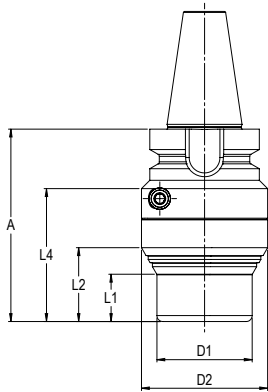


APC 20

BT30* 2 – 20 mm										
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced kg
81	300 120Z 43P 0	A/AD	20	31		56	40	53		20.000 G=2,5 1,2
BT40*										
69	300 020Z 44P 0	A/AD	18	38			40	63		20.000 G=2,5 1,4
BT50*										
80	300 020Z 45P 0	A/AD	18	38		43	40	63		20.000 G=2,5 4,2



Slim5

Precision Chuck APC, ISO 7388-2 with additional Flange contact.
Slim line with 4,5° especially for 5-axis operations. Easy exchange of tools by setting of hex-key (see page 45). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 32–34). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

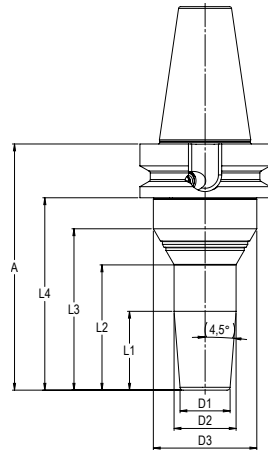

APC 14 Slim5

BT40* Slim5 2 – 14 mm										
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced kg
97	300 414Z 44P 0	A/AD		38	56	71	24	30	50	20.000 G=2,5 1,4
119	300 414Z 44P 1	A/AD	38	61	78	93	24	30	50	20.000 G=2,5 1,5
156	300 414Z 44P 2	A/AD	38	85	103	129	24	30	50	20.000 G=2,5 1,8



APC 20 Slim5

BT40* Slim5 2 – 20 mm										
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced kg
97	300 420Z 44P 0	A/AD		44	54	71	32	39	50	20.000 G=2,5 1,5
119	300 420Z 44P 1	A/AD	51	69	78	93	32	40	50	20.000 G=2,5 1,6
156	300 420Z 44P 2	A/AD	51	94	103	129	32	40	50	20.000 G=2,5 2,0



High-End

Chuck for fine machining

This two-piece design consists of a compensating adapter and a compensating chuck. It permits an adjustment of tools to the μm , especially for long tools and projection lengths. Ideal for high precision reaming and drilling. Axial and radial adjustment is done with different setting screws. Another 6 screws are used for fine balancing. Suitable for inner coolant flow up to a pressure of 80 bar by using a small adapter sleeve between comparison adapter and chuck. The total length (gage-length) is an addition of L1 (adapter) and L4 (chuck). For more information on the handling and μm -precise adjustment see: www.albrecht-germany.com/Instruction



Compensating Chuck APC with fine balancing holes 6xM6

Easy exchange of tools by setting of hex-key (see page 45). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 32–34). Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA. Coolant tubes see page 79.

Compensating Adapter

HSK63-Form A

Modul	Part.No.	d	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
70	300 M76Z 663 0	70	60							by design	1,3
80	300 M86Z 663 0	80	60							by design	1,4
100	300 M16Z 663 0	100	65							by design	1,9

HSK100-Form A

Modul	Part.No.	d	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
70	300 M76Z 610 0	70	55							by design	1,6
80	300 M86Z 610 0	80	55							by design	2,8
100	300 M16Z 610 0	100	65							by design	3,7



APC 20

Compensating Chuck

2 – 20 mm

Modul	Part.No.	d	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
70	300 120Z M76 0	70	20	31	72	87	40	53	-	by design	1,1
80	300 120Z M86 0	80	20	31	56	73	40	53	-	by design	1,3

APC 25

16 – 32 mm

Modul	Part.No.	d	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
100	300 025Z M16 0	100	83	-	97	118	63	-	-	by design	3,1



Adapter sleeve for inner coolant flow

Modul	Part.No.	O-Ring
all	139 5004 001 0	17x1,5

Collets

See page 36–37 **APC 14** Collets 2-14 mm

See page 38–39 **APC 20** Collets 2-20 mm

See page 40–41 **APC 25** Collets 16-32 mm



Coolant Types

Collets Peripheral Coolant

Additional cooling and rinsing effect. Increases the safety of processing.



Collets Coolant 2.0

With additional channels for peripheral cooling directly on the tool shank. Up to 60% higher Metal-Removal-Rate (MRR) and tool life



Collets Internal Coolant

For tools with internal coolant.
100% leak proof up to 100 bar coolant pressure.



Minimal-Quantity-Lubrication MQL

Set for collets with internal coolant. For 1- and 2-Channel Systems.
See page 42–43



Collets with Pin-Lock

APC collet with mechanical pull stop Pin-Lock

Easy mechanical pull stop solution in combination with side lock (Weldon) shanks corresponding to DIN 6535 HB and DIN 1835 B.

All positive features of APC are kept like runout accuracy and dampening. Special coating. Maintenance free. Collet is supplied with 3 pins, pin punch, assembly tool. Balanced by design in combination with Weldon shank and pin.



Positioning tool

Remove the length setting screw, then position the Weldon-clamping surface on the side of the bore. Now insert the tool into the collet until the Weldon-clamping surface lies in the range of the bore.



Positioning pin

The locking-pin has to be inserted with the help of the pin punch into the bore of the collet up to the block. Caution: The pin must not stick out of the collet.




Free from backlash

With the assembly tool the length stop screw has to be screwed, so that the cutting tool is free of backlash. Caution: Mounting without axial pressure. The collet with the secured tool can now be placed into the APC chuck.

Collets APC14


Special Coating. Maintenance free. Integrated, fine adjustable length stop.
Clamping of tool shanks corresponding to DIN 1835 A, B and DIN 6535 HB, HA.

Peripheral Coolant




included length stop

Coolant 2.0



included length stop

Coolant 2.0
Pin-Lock for Weldon shanks



included length stop
with 3 pins and assembly tool

D	Part.No.	Balanced	Part.No.	Balanced	Part.No.	Balanced
2,0	136 1402 000 0	yes				
3,0	136 1403 000 0	yes				
4,0	136 1404 000 0	yes				
5,0	136 1405 000 0	yes				
6,0	136 1406 000 0	yes	136 1406 000 P	yes		
7,0	136 1407 000 0	yes				
8,0	136 1408 000 0	yes	136 1408 000 P	yes		
9,0	136 1409 000 0	yes				
10,0	136 1410 000 0	yes	136 1410 000 P	yes	136 1410 0LO P	no
11,0	136 1411 000 0	yes				
12,0	136 1412 000 0	yes	136 1412 000 P	yes	136 1412 0LO P	no
14,0	136 1414 000 0	yes				

Special sizes and inch diameter on request

Central Coolant



included length stop

Central Coolant
Pin-Lock for Weldon shanks



included length stop
with 3 pins and assembly tool

D	Part.No.	Balanced	Part.No.	Balanced
2,0	136 1402 000 T	yes		
3,0	136 1403 000 T	yes		
4,0	136 1404 000 T	yes		
5,0	136 1405 000 T	yes		
6,0	136 1406 000 T	yes		
7,0	136 1407 000 T	yes		
8,0	136 1408 000 T	yes		
9,0	136 1409 000 T	yes		
10,0	136 1410 000 T	yes	136 1410 0LO T	no
11,0	136 1411 000 T	yes		
12,0	136 1412 000 T	yes	136 1412 0LO T	no
14,0	136 1414 000 T	yes		

Special sizes and inch diameter on request

Collets APC20

Special Coating. Maintenance free. Integrated, fine adjustable length stop.
Clamping of tool shanks corresponding to DIN 1835 A, B and DIN 6535 HB, HA.

Peripheral Coolant



included length stop

Coolant 2.0



included length stop

Coolant 2.0
Pin-Lock for Weldon shanks



included length stop
with 3 pins and assembly tool
Balanced by design for operation
with Weldon-Shank, made out of
hard-metal and included Pin

D	Part.No.	Balanced	Part.No.	Balanced	Part.No.	Balanced
2,0	136 2002 000 0	yes				
3,0	136 2003 000 0	yes				
4,0	136 2004 000 0	yes				
5,0	136 2005 000 0	yes				
6,0	136 2006 000 0	yes	136 2006 000 P	yes		
7,0	136 2007 000 0	yes				
8,0	136 2008 000 0	yes	136 2008 000 P	yes		
9,0	136 2009 000 0	yes				
10,0	136 2010 000 0	yes	136 2010 000 P	yes	136 2010 0LO P	yes
11,0	136 2011 000 0	yes				
12,0	136 2012 000 0	yes	136 2012 000 P	yes	136 2012 0LO P	yes
13,0	136 2013 000 0	yes				
14,0	136 2014 000 0	yes	136 2014 000 P	yes	136 2014 0LO P	yes
15,0	136 2015 000 0	yes				
16,0	136 2016 000 0	yes	136 2016 000 P	yes	136 2016 0LO P	yes
17,0	136 2017 000 0	yes				
18,0	136 2018 000 0	yes			136 2018 0LO 0 *	no
20,0	136 2020 000 0	yes			136 2020 0LO 0 *	no

Special sizes and inch diameter on request

* with extended slots instead of
additional channels

Central Coolant



included length stop

Central Coolant
Pin-Lock for Weldon shanks



included length stop
with 3 pins and assembly tool
Balanced by design for operation
with Weldon-Shank, made out of
hard-metal and included Pin

D	Part.No.	Balanced	Part.No.	Balanced
2,0	136 2002 000 T	yes		
3,0	136 2003 000 T	yes		
4,0	136 2004 000 T	yes		
5,0	136 2005 000 T	yes		
6,0	136 2006 000 T	yes		
7,0	136 2007 000 T	yes		
8,0	136 2008 000 T	yes		
9,0	136 2009 000 T	yes		
10,0	136 2010 000 T	yes	136 2010 0LO T	yes
11,0	136 2011 000 T	yes		
12,0	136 2012 000 T	yes	136 2012 0LO T	yes
13,0	136 2013 000 T	yes		
14,0	136 2014 000 T	yes	136 2014 0LO T	yes
15,0	136 2015 000 T	yes		
16,0	136 2016 000 T	yes	136 2016 0LO T	yes
17,0	136 2017 000 T	yes		
18,0	136 2018 000 T	yes	136 2018 0LO T	no
20,0	136 2020 000 T	yes	136 2020 0LO T	no

Special sizes and inch diameter on request

Collets APC25

Special Coating. Maintenance free. Integrated, fine adjustable length stop.
Clamping of tool shanks corresponding to DIN 1835 A, B and DIN 6535 HB, HA.

Peripheral Coolant



included length stop

Coolant 2.0
Pin-Lock for Weldon shanks



included length stop
with 3 pins and assembly tool
Balanced by design for operation
with Weldon-Shank, made out of
hard-metal and included Pin

Central Coolant



included length stop

Central Coolant
Pin-Lock for Weldon shanks



included length stop
with 3 pins and assembly tool
Balanced by design for operation
with Weldon-Shank, made out of
hard-metal and included Pin

D	Part.No.	Balanced	Part.No.	Balanced
16,0	136 2516 000 O	yes	136 2516 OLO P	yes
18,0	136 2518 000 O	yes	136 2518 OLO P	yes
20,0	136 2520 000 O	yes	136 2520 OLO P	yes
22,0	136 2522 000 O	yes	136 2522 OLO P	no
25,0	136 2525 000 O	yes	136 2525 OLO P	no
32,0	136 2532 000 O	yes	136 2532 OLO O*	no

Special sizes and inch diameter on request

* with extended slots instead of
additional channels


D	Part.No.	Balanced	Part.No.	Balanced
16,0	136 2516 000 T	yes	136 2516 OLO T	yes
18,0	136 2518 000 T	yes	136 2518 OLO T	yes
20,0	136 2520 000 T	yes	136 2520 OLO T	yes
22,0	136 2522 000 T	yes	136 2522 OLO T	no
25,0	136 2525 000 T	yes	136 2525 OLO T	no
32,0	136 2532 000 T	yes	136 2532 OLO T	no

Special sizes and inch diameter on request

MQL inside

MQL by Albrecht

Of course the APC Precision Chuck is also available with Minimum-Quantity-Lubrication. For 1- and 2-Channel-systems in combination with central coolant collets. Please choose your MQL Length screw and Coolant tube alternatively 1- or 2-channel. 100% perfect matched set with MQL conform delivery at the tool shaft end with 90°. Based on MQL company standard. Insertion depth corresponding to DIN 1835 and DIN 6535.

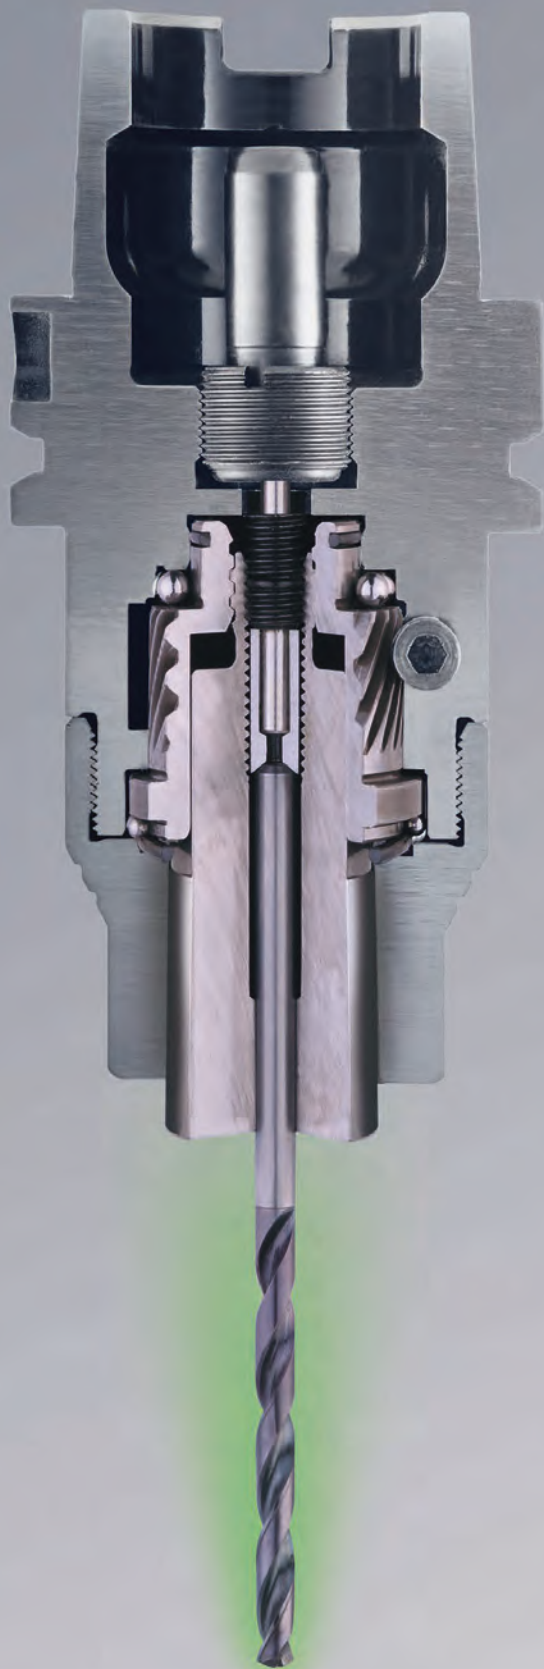

Albrecht MQL, minimum quantity lubrication

In combination with Central Coolant Collets, see page 37 and 39.

DIN 69893 HSK 50 Form A (300 014Z 650 0 and 300 120Z 650 0)

ø	MQL Length screw Part.No.	Coolant tube 1-channel Part.No.	Coolant tube 2-channel Part.No.
4 - 6	132 0004 000 3	139 0008 650 2	139 0004 650 2
8	132 0008 000 3	139 0008 650 2	139 0004 650 2
10	132 0010 000 3	139 0008 650 2	139 0004 650 2
12	132 0012 000 3	139 0008 650 2	139 0004 650 2
14	132 0014 000 3	139 0008 650 2	139 0004 650 2
16	132 0016 000 3	139 0008 650 2	139 0004 650 2
18	132 0018 000 3	139 0008 650 2	139 0004 650 2

DIN 69893 HSK 63 Form A (300 014Z 663 0 and 300 120Z 663 0)

ø	MQL Length screw Part.No.	Coolant tube 1-channel Part.No.	Coolant tube 2-channel Part.No.
4 - 6	132 0004 000 3	139 0008 663 2	139 0004 663 2
8	132 0008 000 3	139 0008 663 2	139 0004 663 2
10	132 0010 000 3	139 0008 663 2	139 0004 663 2
12	132 0012 000 3	139 0008 663 2	139 0004 663 2
14	132 0014 000 3	139 0008 663 2	139 0004 663 2
16	132 0016 000 3	139 0008 663 2	139 0004 663 2
18	132 0018 000 3	139 0008 663 2	139 0004 663 2

DIN 69893 HSK 80 Form A (300 020Z 680 0)

ø	MQL Length screw Part.No.	Coolant tube 1-channel Part.No.	Coolant tube 2-channel Part.No.
4 - 6	132 0004 000 3	139 0008 680 2	139 0004 680 0
8	132 0008 000 3	139 0008 680 2	139 0004 680 0
10	132 0010 000 3	139 0008 680 2	139 0004 680 0
12	132 0012 000 3	139 0008 680 2	139 0004 680 0
14	132 0014 000 3	139 0008 680 2	139 0004 680 0
16	132 0016 000 3	139 0008 680 2	139 0004 680 0
18	132 0018 000 3	139 0008 680 2	139 0004 680 0

DIN 69893 HSK 100 Form A (300 020Z 610 0)

ø	MQL Length screw Part.No.	Coolant tube 1-channel Part.No.	Coolant tube 2-channel Part.No.
4 - 6	132 0004 000 3	139 0008 610 2	139 0004 610 0
8	132 0008 000 3	139 0008 610 2	139 0004 610 0
10	132 0010 000 3	139 0008 610 2	139 0004 610 0
12	132 0012 000 3	139 0008 610 2	139 0004 610 0
14	132 0014 000 3	139 0008 610 2	139 0004 610 0
16	132 0016 000 3	139 0008 610 2	139 0004 610 0
18	132 0018 000 3	139 0008 610 2	139 0004 610 0

Extended coolant tubes for APC-Chucks with longer gage-length on request



Accessories



Standard Key	Part.No.
with marking approx. 10 Nm	139 0000 905 0



Torque Key	Part.No.
corr. ISO 6789 at 10 Nm	139 0010 900 0
Spare bit 1/4"	139 0000 901 4



for Screwdriver	Part.No.
torque limiter at 10 Nm	139 0010 901 0
spare bit 3/8"	139 0010 901 4



Taper Wiper	Part.No.
for APC 14	139 0000 GR1 0
for APC 20	139 0000 GR2 0
for APC 25	139 0000 GR4 0



Spare parts	Part.No.
Worm set APC 14/20/25 Ø9 short	139 0000 004 0
Worm set APC 14/20/25 Ø9 long	139 0000 005 0



Spare-Pins for Pin-Lock		
DxL	for	Part.No.
Ø2x12 (3 pieces)	APC20 Ø18	139 3020 212 0
Ø3x8 (3 pieces)	APC20 Ø20	139 3020 308 0
Ø3x12 (3 pieces)	APC20 Ø16	139 3020 312 0
Ø3x14 (3 pieces)	APC20 Ø6-14	139 3020 314 0
Ø4x12 (3 pieces)	APC25 Ø32	139 3025 412 0
Ø4x20 (3 pieces)	APC25 Ø22-25	139 3025 420 0
Ø4x26 (3 pieces)	APC25 Ø16-20	139 3025 426 0



Storage	Dimensions	Part.No.
for 24 Collets, APC 14	345x250x30	V01 FP14 024 0
for 21 Collets, APC 20	345x250x30	V01 FP20 021 0
for 10 Collets, APC 25	345x250x50	V01 FP25 010 0



A high-speed industrial machine tool, specifically a drill or end mill, is shown in the process of drilling a hole into a metal workpiece. The tool is a dark, cylindrical metal with a fluted design. It is mounted on a larger, more complex machine structure. The background is a bright, slightly blurred industrial setting. The overall image conveys a sense of precision and high performance in manufacturing.

Ultra

**Highest metal
removal rate.
Adaptive cooling
ring 10-30°.
Safety of processing
with Pin-Lock.**


ALBRECHT
Germany

Ultra metal removal rate.
Ultra-Gripping.
Ultra-Dampening.
Ultra-Safe due to Pin-Lock.
In addition peripheral cooling
which adapts perfectly to
every task.

Up to 33.000 rpm.
Runout $\leq 3 \mu\text{m}$.
Cooling-Ring 10-30°.


Albrecht Ultra – The basis
for record-setting.

Adaptive Cooling

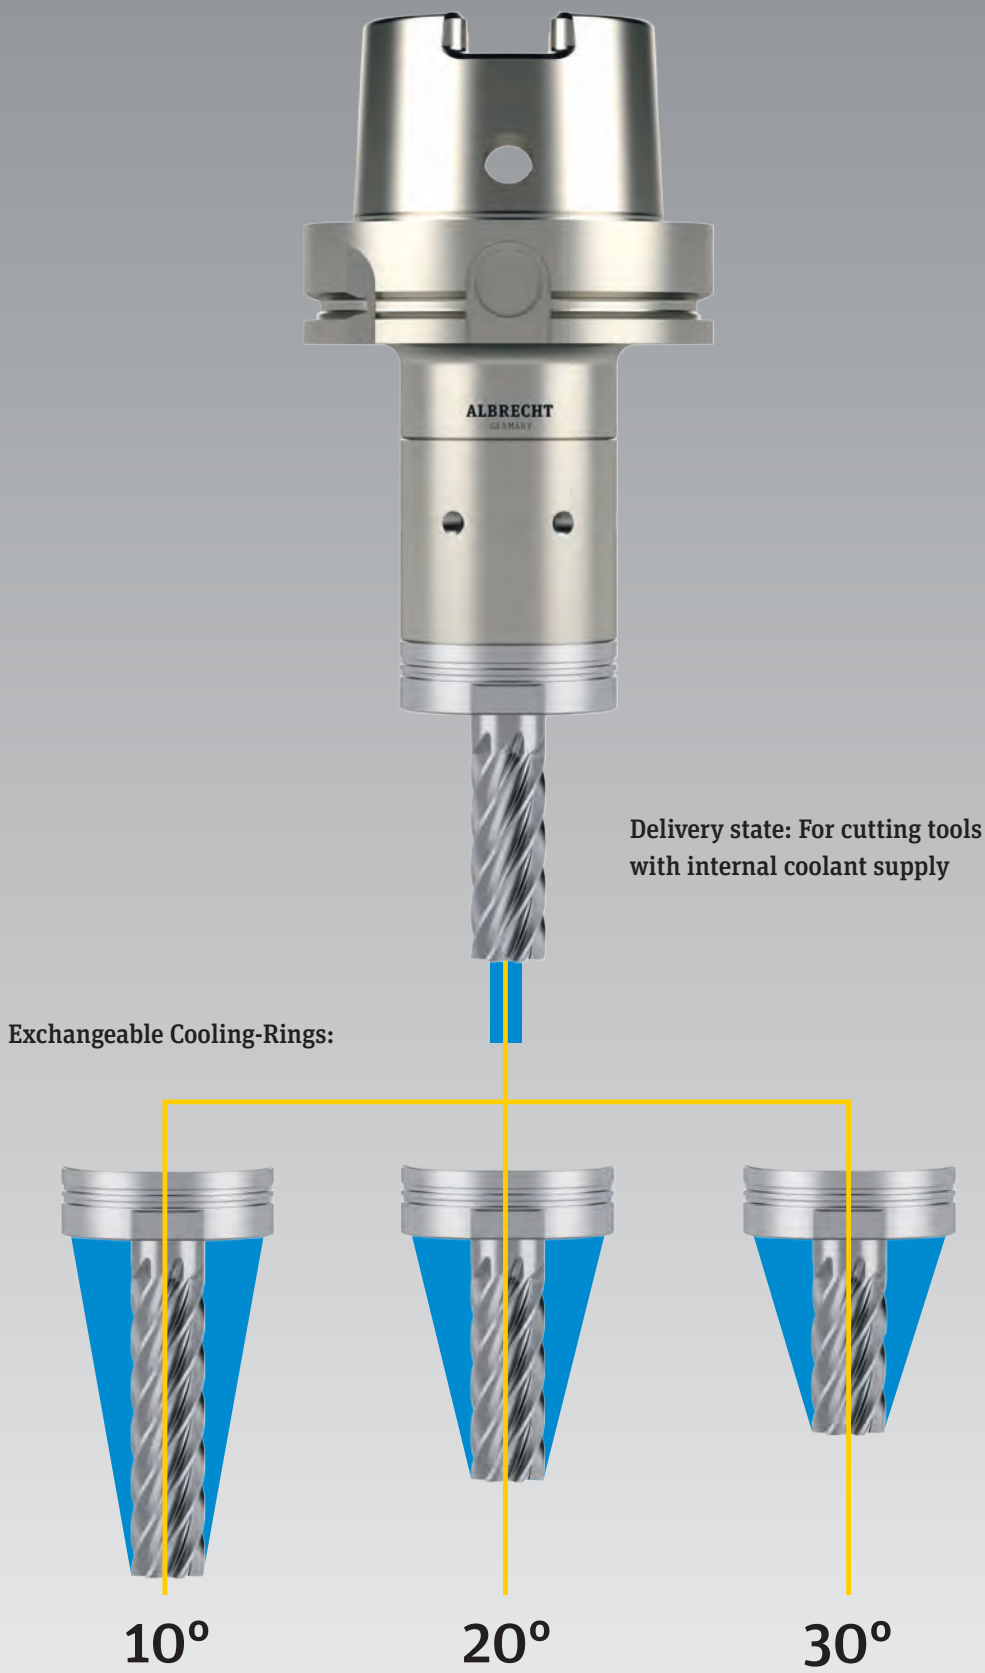

HSK

Ultra Chuck, DIN 69893 (ISO 12164)
with fine balancing holes 6xM6
Easy exchange of tools by using a hex-key (see page 51). Maintenance-free. Sealed against coolant and particles. Slow collet taper angle. Collet with special coating (see page 51). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA. Delivery state for cutting tools with internal coolant supply. Changeable cooling ring for peripheral coolant (see page 51)

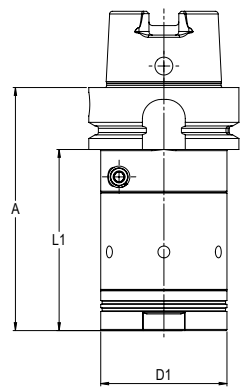

Application examples: Ultra in operation

Material	Tensile strength [N/mm ²]	Milling-Ø [mm]	Speed [r.p.m.]	vf [mm/min]	ae [mm]	ap [mm]	MRR [cm ³ /min]
Titanium Ti 6-4		20	2.800	896	20	25	448
1.2892	1500	20	2.389	1.194	1	40	48
Aluminium 7075		25	30.000	13.500	25	40	13.500
Toolox 33	1080	20	2.800	1.758	2,5	35	154

Ultra Chuck 20

16 – 20 mm						
A	Part.No.	Form	L1	D1	Balanced	kg
102	360 020A 663 0	A	76	53	20.000 G=2,5	1,5
HKS80 A						
108	360 020A 680 0	A	82	53	20.000 G=2,5	2,0
HKS100 A						
110	360 020A 610 0	A	81	53	20.000 G=2,5	2,9



Ultra Chuck 25


20 – 25 mm						
A	Part.No.	Form	L1	D1	Balanced	kg
110	360 025A 663 0	A	84	53	20.000 G=2,5	1,4
HKS80 A						
116	360 025A 680 0	A	90	53	20.000 G=2,5	2,0
HKS100 A						
118	360 025A 610 0	A	89	53	20.000 G=2,5	2,9



Collets with Pin-Lock

Ultra collet with mechanical pull stop Pin-Lock

Easy mechanical pull stop solution in combination with side lock (Weldon) shanks corresponding to DIN 6535 HB and DIN 1835 B.
All positive features of Ultra are kept like runout accuracy and dampening. Special coating. Maintenance free.
Collet is supplied with 3 pins, pin punch, assembly tool. Balanced by design in combination with Weldon shank and pin.

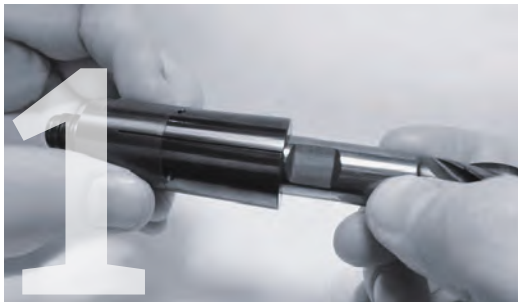

Positioning tool
Remove the length setting screw, than position the Weldon-clamping surface on the side of the bore. Now insert the tool into the collet until the Weldon-clamping surface lies in the range of the bore.



Positioning pin
The locking-pin has to be inserted with the help of the pin punch into the bore of the collet up to the block.
Caution: The pin must not stick out of the collet.



Free from backlash
With the assembly tool the length stop screw has to be screwed, so that the cutting tool is free of backlash.
Caution: Mounting without axial pressure. The collet with the secured tool can now be placed into the Ultra-chuck.

Ultra Chuck Collets. Special coating. Maintenance free. Pin-Lock for Weldon shanks.
Delivered with length stop, 3 pins and assembly tool.
Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

Ultra 20



D	Part.No.	Part.No.
16,0	166 2016 OLO T	166 2016 OLO P
20,0	166 2020 OLO T	166 2020 OLO P
25,0		

Ultra 25



D	Part.No.	Part.No.
16,0		
20,0	166 2520 OLO T	166 2520 OLO P
25,0	166 2525 OLO T	166 2525 OLO P

Standard Key	Part.No.
With marking approx. 14 Nm	139 0000 906 0

Torque Key	Part.No.
corresponding ISO 6789 at 12 Nm	139 0012 900 0
corresponding ISO 6789 at 14 Nm	139 0014 900 0
Spare bit ¼"	139 0000 901 4

Cooling-Ring		Part.No.
no. of holes and angle	AF	
4 x 10°	50	161 2025 000 1
6 x 20°	50	161 2025 000 2
6 x 30°	50	161 2025 000 3
Set consisting of 4 x 10° / 6 x 20° / 6 x 30°		161 2025 S00 0

Spare part	Part.No.
Worm Set Ultra	139 0000 004 0

Spare Pins for Pin-Lock		Part.No.
DxL	for	
Ø3x14 (3 pieces)	Ultra20 Ø16 und Ø20	139 3020 314 0
Ø4x20 (3 pieces)	Ultra25 Ø20	139 3025 420 0
Ø4x16 (3 pieces)	Ultra25 Ø25	139 3025 416 0





Micro

**The Albrecht Micro.
Made for the
smallest and finest
surfaces. Range
1 - 6 Millimeter.**

Ideal for microtools.
Clamping range 1 - 6 mm.
Peripheral or internal cooling.
Significantly better dampening
in comparison to Shrink Chucks.
Slim shape D1=13,5 mm.
Perfect runout $\leq 3 \mu\text{m}$ 2,5xD.
Up to 40.000 1/min $\leq 1 \text{ gmm}$.


For the finest surfaces even for
difficulty accessible areas.
Special coated collets.
Maintenance-free.
The Albrecht Micro.
None is more fine.

Micro Chuck-Extension


For extension of Precision Chucks.
Very slim design for operation areas which are not easy to access. High gripping torque and accuracy due to slow angle taper.

Micro Precision-Chuck-Extension with Cylindrical Shank.
Easy exchange of tools by setting of hex-key (included in delivery). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 61).
Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA. Tolerance of shank h6.
System-Runout-Accuracy 8 µm at 2,5 x D.

Cylindrical shank 14 mm							1 – 6 mm
L1	Part.No.	Coolant	L2	D1	D2	AF	kg
100	310 1006 814 1	Central	29	13	14	13	0,16
150	310 2006 814 1	Central	29	13	14	13	0,10

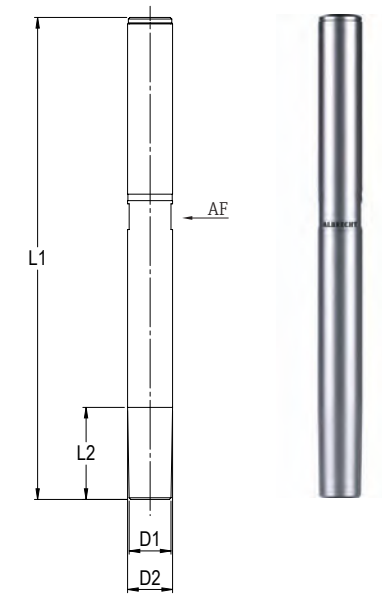


Cylindrical shank 20 mm							1 – 6 mm
L1	Part.No.	Coolant	L2	D1	D2	AF	kg
100	310 1006 820 1	Central	45	13	20	13	0,17
150	310 2006 820 1	Central	67	13	20	19	0,30

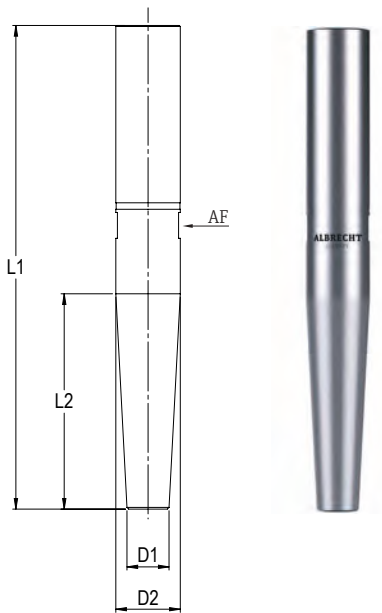

HSK

Micro Precision Chuck, ISO 12164 (DIN 69893)

Easy exchange of tools by setting of hex-key (included in delivery). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 61). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA. Coolant tubes see page 79.

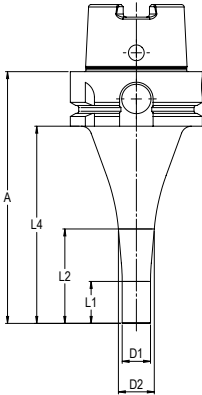


HSK 40-A 1 – 6 mm									
A	Part.No.	Form	L1	L2	L4	D1	D2	Balanced	kg
75	310 1006 640 1	A	20	35	55	13,5	16	<1gmm	0,3
HSK 50-A									
85	310 1006 650 1	A	20	34	59	13,5	16	<1gmm	0,5
120	310 2006 650 1	A	20	45	94	13,5	18	<1gmm	0,7
HSK 63-A									
90	310 1006 663 1	A	20	30	64	13,5	15	20.000 G=2,5	0,8
120	310 2006 663 1	A	20	45	94	13,5	17	20.000 G=2,5	1,0
160	310 3006 663 1	A	20	70	134	13,5	22	20.000 G=2,5	1,2
HSK 40-E									
75	310 10E6 640 1	E	20	35	55	13,5	16	<1gmm	0,3
HSK 50-E									
85	310 10E6 650 1	E	20	40	59	13,5	17	<1gmm	0,5
120	310 20E6 650 1	E	20	45	94	13,5	18	<1gmm	0,7



SK

Micro Precision Chuck, ISO 7388-1 (DIN 69871)

Easy exchange of tools by setting of hex-key (included in delivery). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 61). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

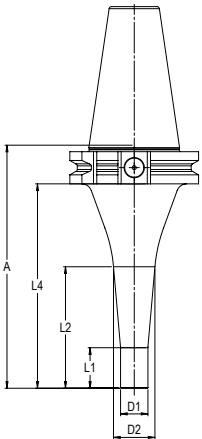


SK 30 1 – 6 mm									
A	Part.No.	Form	L1	L2	L4	D1	D2	Balanced	kg
75	310 2006 230 1	A/AD	20	32	56	13,5	16	<1gmm	0,5
SK 40									
90	310 1006 240 1	A/AD	20	38	71	13,5	17	20.000 G=2,5	1,0
120	310 2006 240 1	A/AD	20	60	101	13,5	21	20.000 G=2,5	1,2
160	310 3006 240 1	A/AD	20	75	141	13,5	23	20.000 G=2,5	1,2



MAS-BT

Micro Precision Chuck, ISO 7388-2 (JIS B 6339)

Easy exchange of tools by setting of hex-key (included in delivery). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 61). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

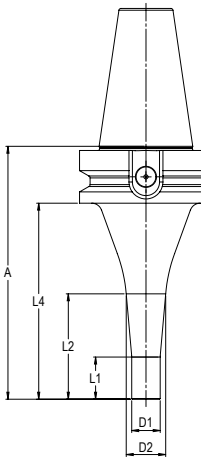


BT 30 1 – 6 mm									
A	Part.No.	Form	L1	L2	L4	D1	D2	Balanced	kg
75	310 2006 430 1	A/AD	20	30	53	13,5	15	<1gmm	0,5
BT 40									
90	310 1006 440 1	A/AD	20	30	63	13,5	15	20.000 G=2,5	1,2
120	310 2006 440 1	A/AD	20	50	93	13,5	19	20.000 G=2,5	1,3
160	310 3006 440 1	A/AD	20	70	133	13,5	22	20.000 G=2,5	1,3



Polygon


Micro Precision Chuck, DIN ISO 26623-1

Easy exchange of tools by setting of hex-key (included in delivery). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 61). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

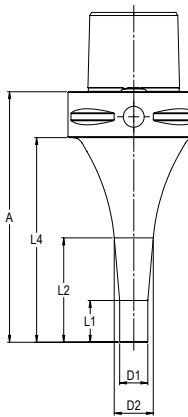

PSC 40 1 – 6 mm									
A	Part.No.	Form	L1	L2	L4	D1	D2	Balanced	kg
75	310 1006 9C4 1	A	20	35	55	13,5	16	<1gmm	0,3
PSC 63									
90	310 1006 9C6 1	A	20	30	68	13,5	15	20.000 G=2,5	1,0
120	310 2006 9C6 1	A	20	50	98	13,5	19	20.000 G=2,5	1,1




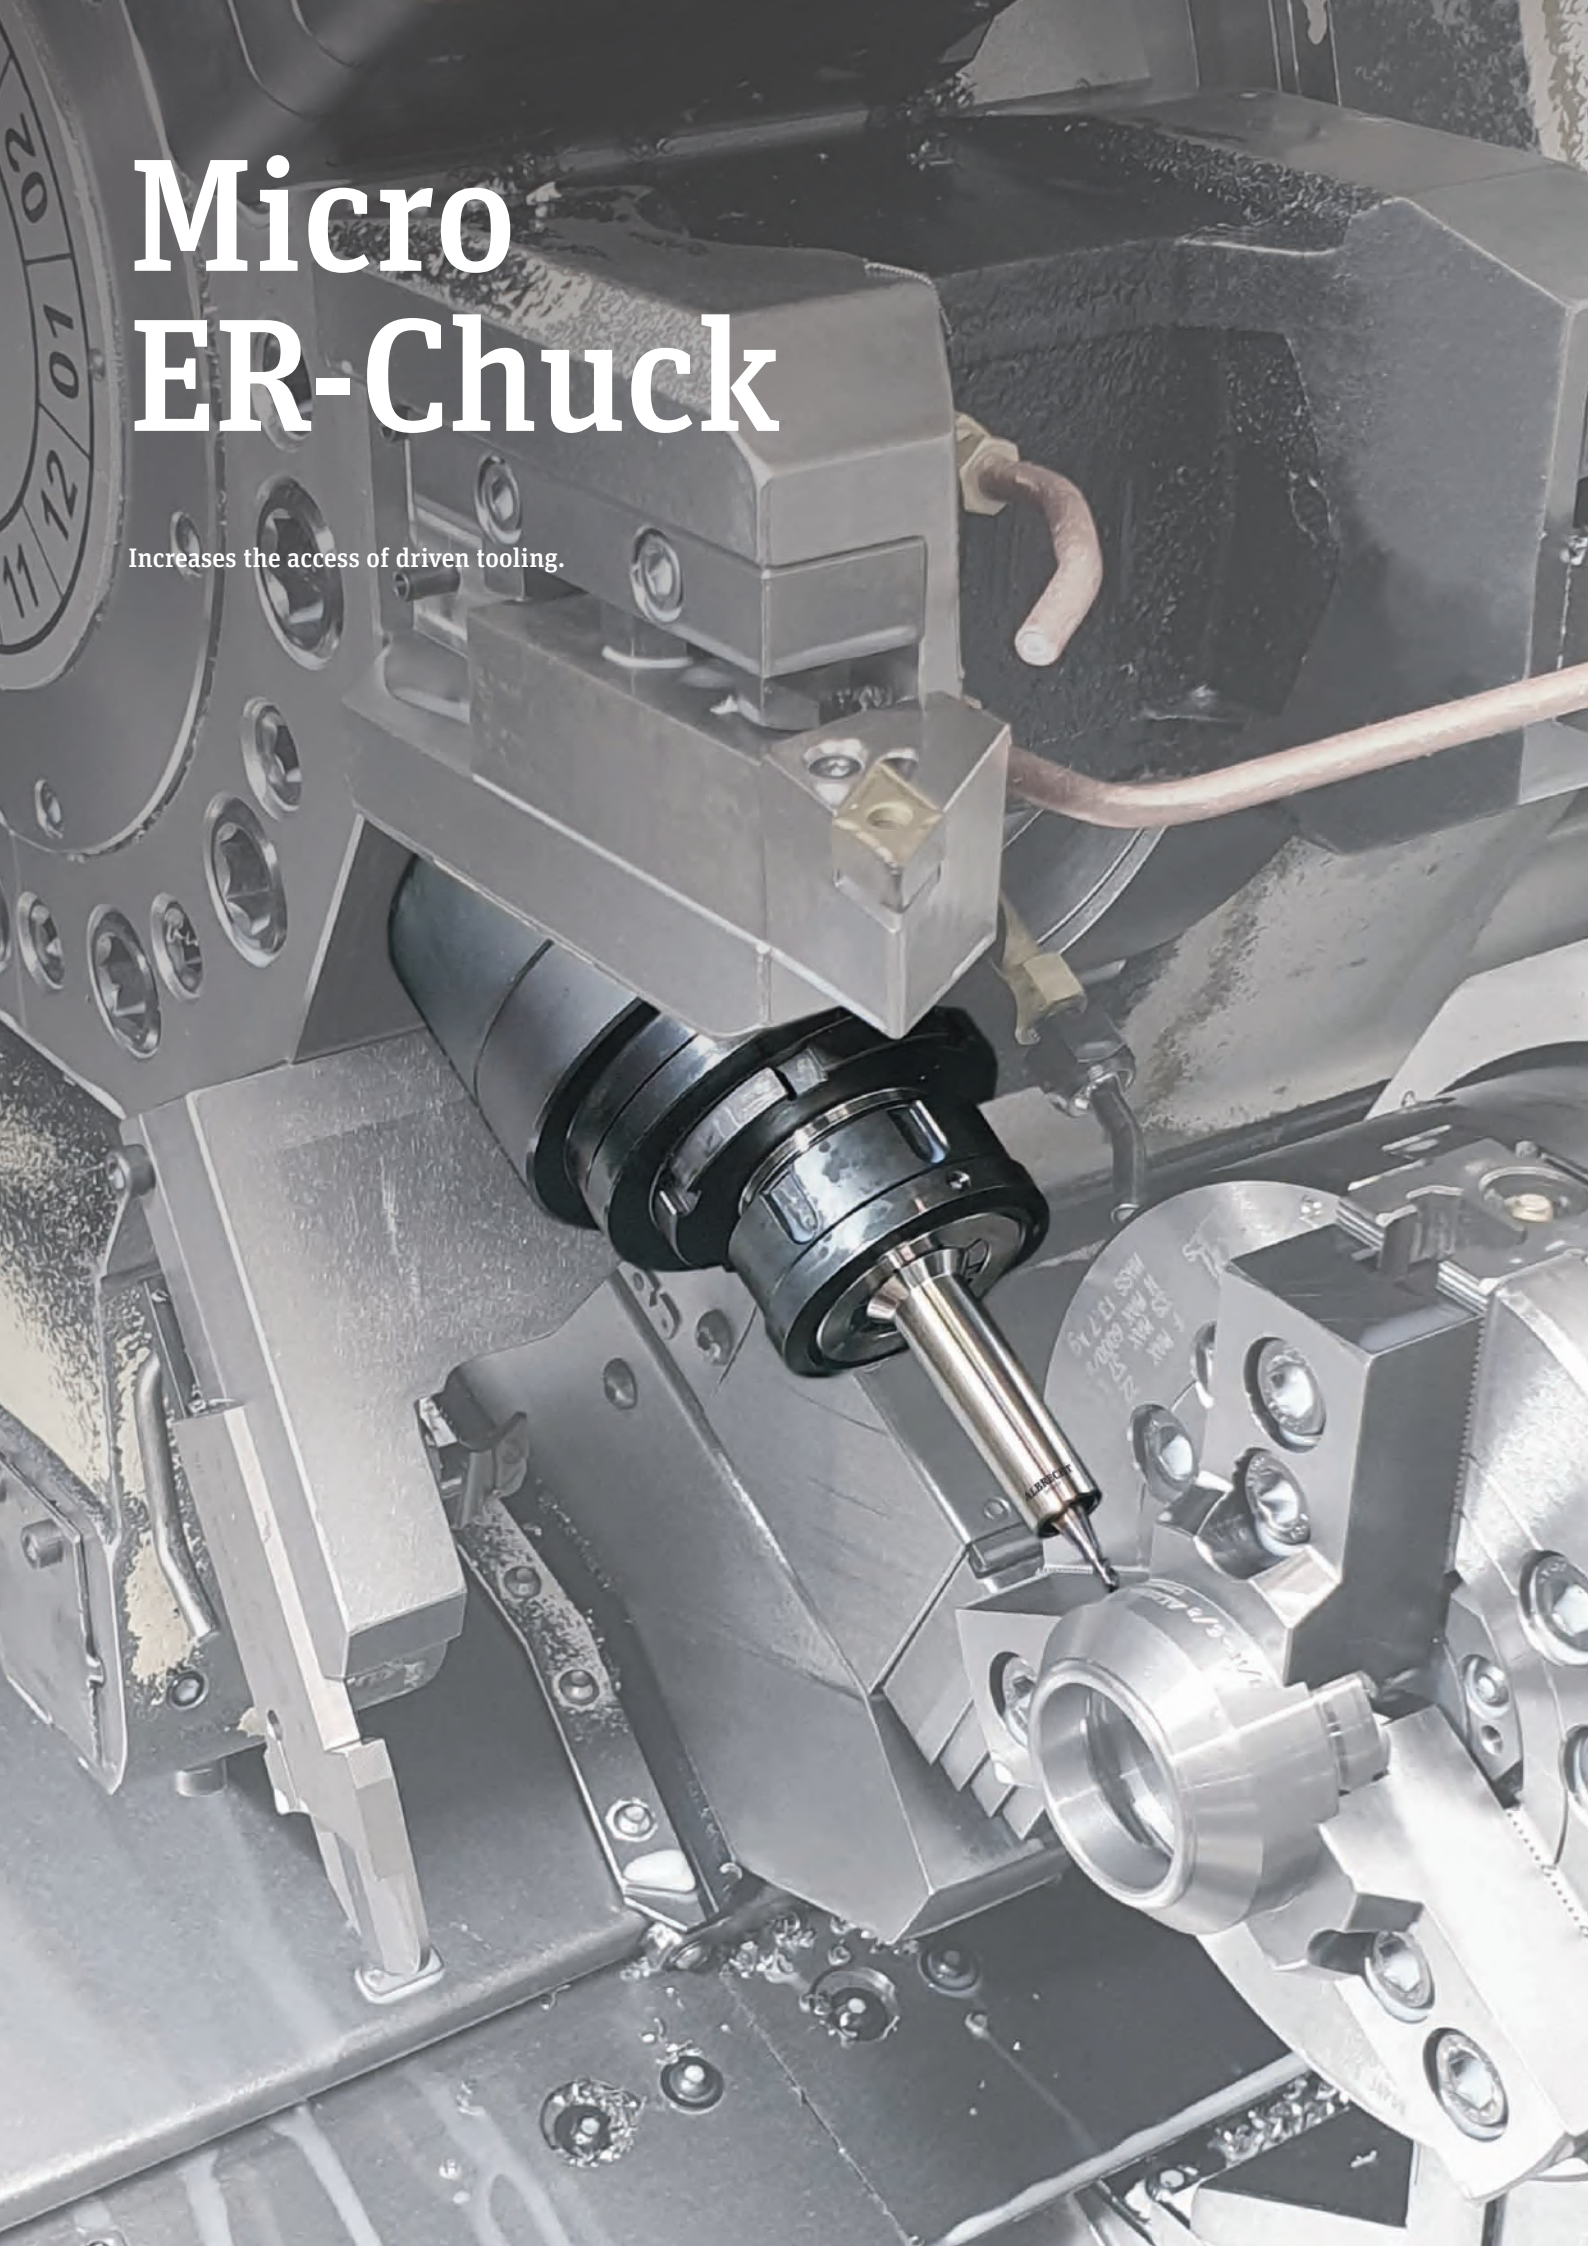

Micro ER-Chuck

Increases the access of driven tooling.


Micro ER-Precision-Chuck, for Collet-Chucks according to DIN ISO 15488
Easy exchange of tools by using a hex-key (included in delivery). Maintenance-free. Sealed against coolant and particles. Slow collet taper angle. Collet with special coating (see page 61). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

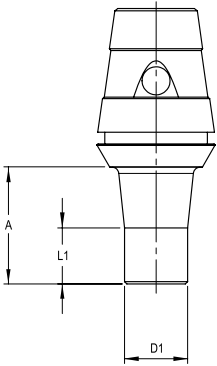

High chip removal and process-reliability with driven tooling

High-speed balanced

Coolant directed to cutting tool

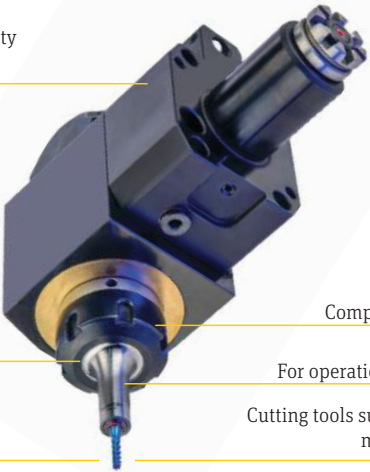

Compatible with common ER-nuts

For operation areas with difficult access.

Cutting tools supported over greater length, more rigidity and dampening.

ER 16 1 – 6 mm					
A	Part.No.	L1	D1	Balanced	kg
35	310 1006 316 1 *	35	13,5	by design	0,1

* Special ER-nut included in delivery



ER 20 1 – 6 mm					
A	Part.No.	L1	D1	Balanced	kg
28	310 1006 320 1	28	13,5	by design	0,1
35	310 2006 320 1	35	13,5	by design	0,1



ER 25 1 – 6 mm					
A	Part.No.	L1	D1	Balanced	kg
25	310 1006 325 1	12	13,5	by design	0,1
40	310 2006 325 1	15	13,5	by design	0,1
50	310 3006 325 1	20	13,5	by design	0,1



ER 32 1 – 6 mm					
A	Part.No.	L1	D1	Balanced	kg
25	310 1006 332 1	12	13,5	by design	0,2
40	310 2006 332 1	15	13,5	by design	0,2
50	310 3006 332 1	20	13,5	by design	0,2



Collets and Accessories



Collets Peripheral Coolant. Additional cooling and rinsing effect. Increases the safety of processing. Special Coating. Maintenance free. Clamping of tool shanks corresponding to DIN 1835A, B and DIN 6335 HB, HA.

1 – 6 mm			
D	Part.No.	Coolant	kg
1,0	136 0601 000 0	Periphery	0,02
2,0	136 0602 000 0	Periphery	0,02
2,5	136 0602 500 0	Periphery	0,02
2,8	136 0602 800 0	Periphery	0,02
3,0	136 0603 000 0	Periphery	0,02
3,5	136 0603 500 0	Periphery	0,02
4,0	136 0604 000 0	Periphery	0,02
4,5	136 0604 500 0	Periphery	0,02
5,0	136 0605 000 0	Periphery	0,02
6,0	136 0606 000 0	Periphery	0,02

Special size and inch diameter on request

Collets Internal Coolant. 100% leak proof up to 100 bar coolant pressure. Special Coating. Maintenance free. Clamping of tool shanks corresponding to DIN 1835A, B and DIN 6335 HB, HA.

1 – 6 mm			
D	Part.No.	Coolant	kg
1,0	136 0601 000 T	Central	0,02
2,0	136 0602 000 T	Central	0,02
2,5	136 0602 500 T	Central	0,02
2,8	136 0602 800 T	Central	0,02
3,0	136 0603 000 T	Central	0,02
3,5	136 0603 500 T	Central	0,02
4,0	136 0604 000 T	Central	0,02
4,5	136 0604 500 T	Central	0,02
5,0	136 0605 000 T	Central	0,02
6,0	136 0606 000 T	Central	0,02

Special size and inch diameter on request

Torque Key	Part.No.
3,0 - 5,4 Nm	139 0005 900 0

Taper Wiper	Part.No.
for Micro	139 0000 GRO 0
Replacement papers, 25 pcs.	139 0000 GRO 2

Pull Stud	Part.No.	Thread	through-hole	Angle	Neck- Ø	kg
SK30	138 0004 230 0	M12	Ø4	15°	9	0,03
BT30	138 0004 430 0	M12	Ø4	45°	8	0,04
BT40	138 0004 440 0	M16	Ø4	45°	10	0,04

based on DIN



XXL Chuck Extension

The extension for all Albrecht APC chucks. Slim and long. The solution for all difficult to access processing zones. Safe transmission of clamping force and torque. Easy to use even when tapping. Internal coolant supply. Run-out < 0.05 mm. Drilled through for coolant supply.

Cylindrical shank 12 mm 3,0 - 6,0 mm				
L	Part.No.	Coolant	D	kg
150	340 0615 812 0	Central	12	0,10
250	340 0625 812 0	Central	12	0,17
355	340 0635 812 0	Central	12	0,24

Cylindrical shank 16 mm 6,0 - 8,0 mm				
L	Part.No.	Coolant	D	kg
150	340 0815 816 0	Central	16	0,15
250	340 0825 816 0	Central	16	0,28
350	340 0835 816 0	Central	16	0,40

Cylindrical shank 18 mm 8,0 - 10,0 mm				
L	Part.No.	Coolant	D	kg
150	340 1015 818 0	Central	18	0,19
250	340 1025 818 0	Central	18	0,36
350	340 1035 818 0	Central	18	0,53

Cylindrical shank 20 mm 11,0 - 12,0 mm				
L	Part.No.	Coolant	D	kg
150	340 1215 820 0	Central	20	0,27
250	340 1225 820 0	Central	20	0,50
350	340 1235 820 0	Central	20	0,73



Collets

For Cylindrical shank 12 mm 3,0 - 6,0 mm				
D	Part.No.	Coolant	AF	kg
3	146 1203 000 0	Periphery	9	0,02
4	146 1204 000 0	Periphery	9	0,02
5	146 1205 000 0	Periphery	9	0,02
6	146 1206 000 0	Periphery	9	0,02

For Cylindrical shank 16 mm 6,0 - 8,0 mm				
D	Part.No.	Coolant	AF	kg
6	146 1606 000 0	Periphery	12	0,02
7	146 1607 000 0	Periphery	12	0,02
8	146 1608 000 0	Periphery	12	0,02

For Cylindrical shank 18 mm 8,0 - 10,0 mm				
D	Part.No.	Coolant	AF	kg
8	146 1808 000 0	Periphery	14	0,04
9	146 1809 000 0	Periphery	14	0,04
10	146 1810 000 0	Periphery	14	0,04

For Cylindrical shank 20 mm 11,0 - 12,0 mm				
D	Part.No.	Coolant	AF	kg
11	146 2011 000 0	Periphery	16	0,05
12	146 2012 000 0	Periphery	16	0,05

Special size and sealed for tools with internal coolant supply on request



Accessories

XXL-Wrench		
For Cylindrical shank	Part.No.	AF
12	149 0000 934 1	9
16	149 0000 934 2	12
18	149 0000 934 3	14
20	149 0000 934 5	16




APC Tool-Grinding- Toolholder



Precision-Tool-Grinding-Toolholder APC
 Universal use for grinding and regrinding of tools. Manual gear transmission. Various collets within the range of 2 to 20 mm. Maximum clearance for grinding wheel. Hardened surfaces, therefore less wear-out. Maintenance-free. Quick tool and diameter exchange. Low risk of injury during tool-exchange. Positive dampening feature. Solid front part of chuck.

- Advantages over Hydraulic-Chucks:**
- > maintenance free due to mechanical gear transmission
 - > almost no wear-out due to hardened surfaces
 - > Grinding into the front part of chuck does not cause hydraulic-oil leakage
 - > Operation with T-handle key under 90°
 - > Higher gripping forces

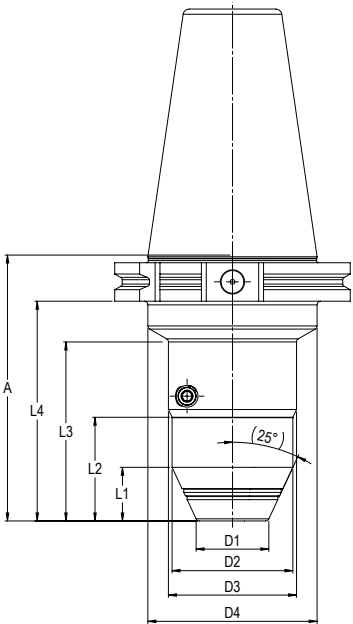

Precision Chuck APC, ISO 7388-1 (DIN 69871)
 Easy exchange of tools by using a hex-key (see page 67). Maintenance-free. Sealed against coolant and particles. Slow collet taper angle. Collet with special coating (see page 66). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

SK50											2 – 20 mm
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	D4	kg
110	300 320Z 250 1	A/AD	22	43	75	91	29	50	53	70	3,9



Collets

Special coating. Maintenance-free. Fine adjustable length stop.
Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

Collet flat




included length stop

Collet conical



included length stop

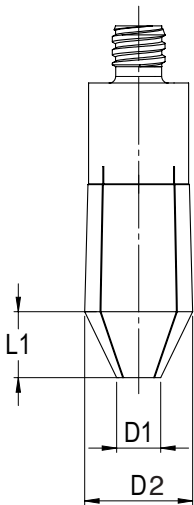

D	Part.No.	L1	Part.No.	D2	D1	L1
2,0	136 2002 000 0	0				
3,0	136 2003 000 0	0	136 2003 000 K	24,6	5,0	7,5
4,0	136 2004 000 0	0	136 2004 000 K	24,6	6,0	7,5
5,0	136 2005 000 0	0	136 2005 000 K	24,6	7,5	7,5
6,0	136 2006 000 0	0	136 2006 000 K	24,6	8,5	7,5
7,0	136 2007 000 0	0				
8,0	136 2008 000 0	0	136 2008 000 K	24,6	10,0	15,0
9,0	136 2009 000 0	0				
10,0	136 2010 000 0	0				
11,0	136 2011 000 0	0				
12,0	136 2012 000 0	0				
13,0	136 2013 000 0	0				
14,0	136 2014 000 0	0				
15,0	136 2015 000 0	0				
16,0	136 2016 000 0	0				
17,0	136 2017 000 0	0				
18,0	136 2018 000 0	0				
20,0	136 2020 000 0	0				

Special size and inch diameter on request

Accessories

Standard Key	Part.No.
With marking approx. 6,5 Nm	139 0000 901 W



Taper Wiper	Part.No.
for APC 20	139 0000 GR2 0



Spare part	Part.No.
Worm Set APC 14/20/25 Ø9 short	139 0000 004 0



Simply turn - ready. With more
precision into a new quality.

Running accuracy of 30 μm
from 1 to 16 mm.

100% clamping force.

Ø 50 mm and built for ever.


Albrecht

CNC-Drill-Chucks




An Albrecht CNC chuck saves you many working days year by year.*

* See page 77

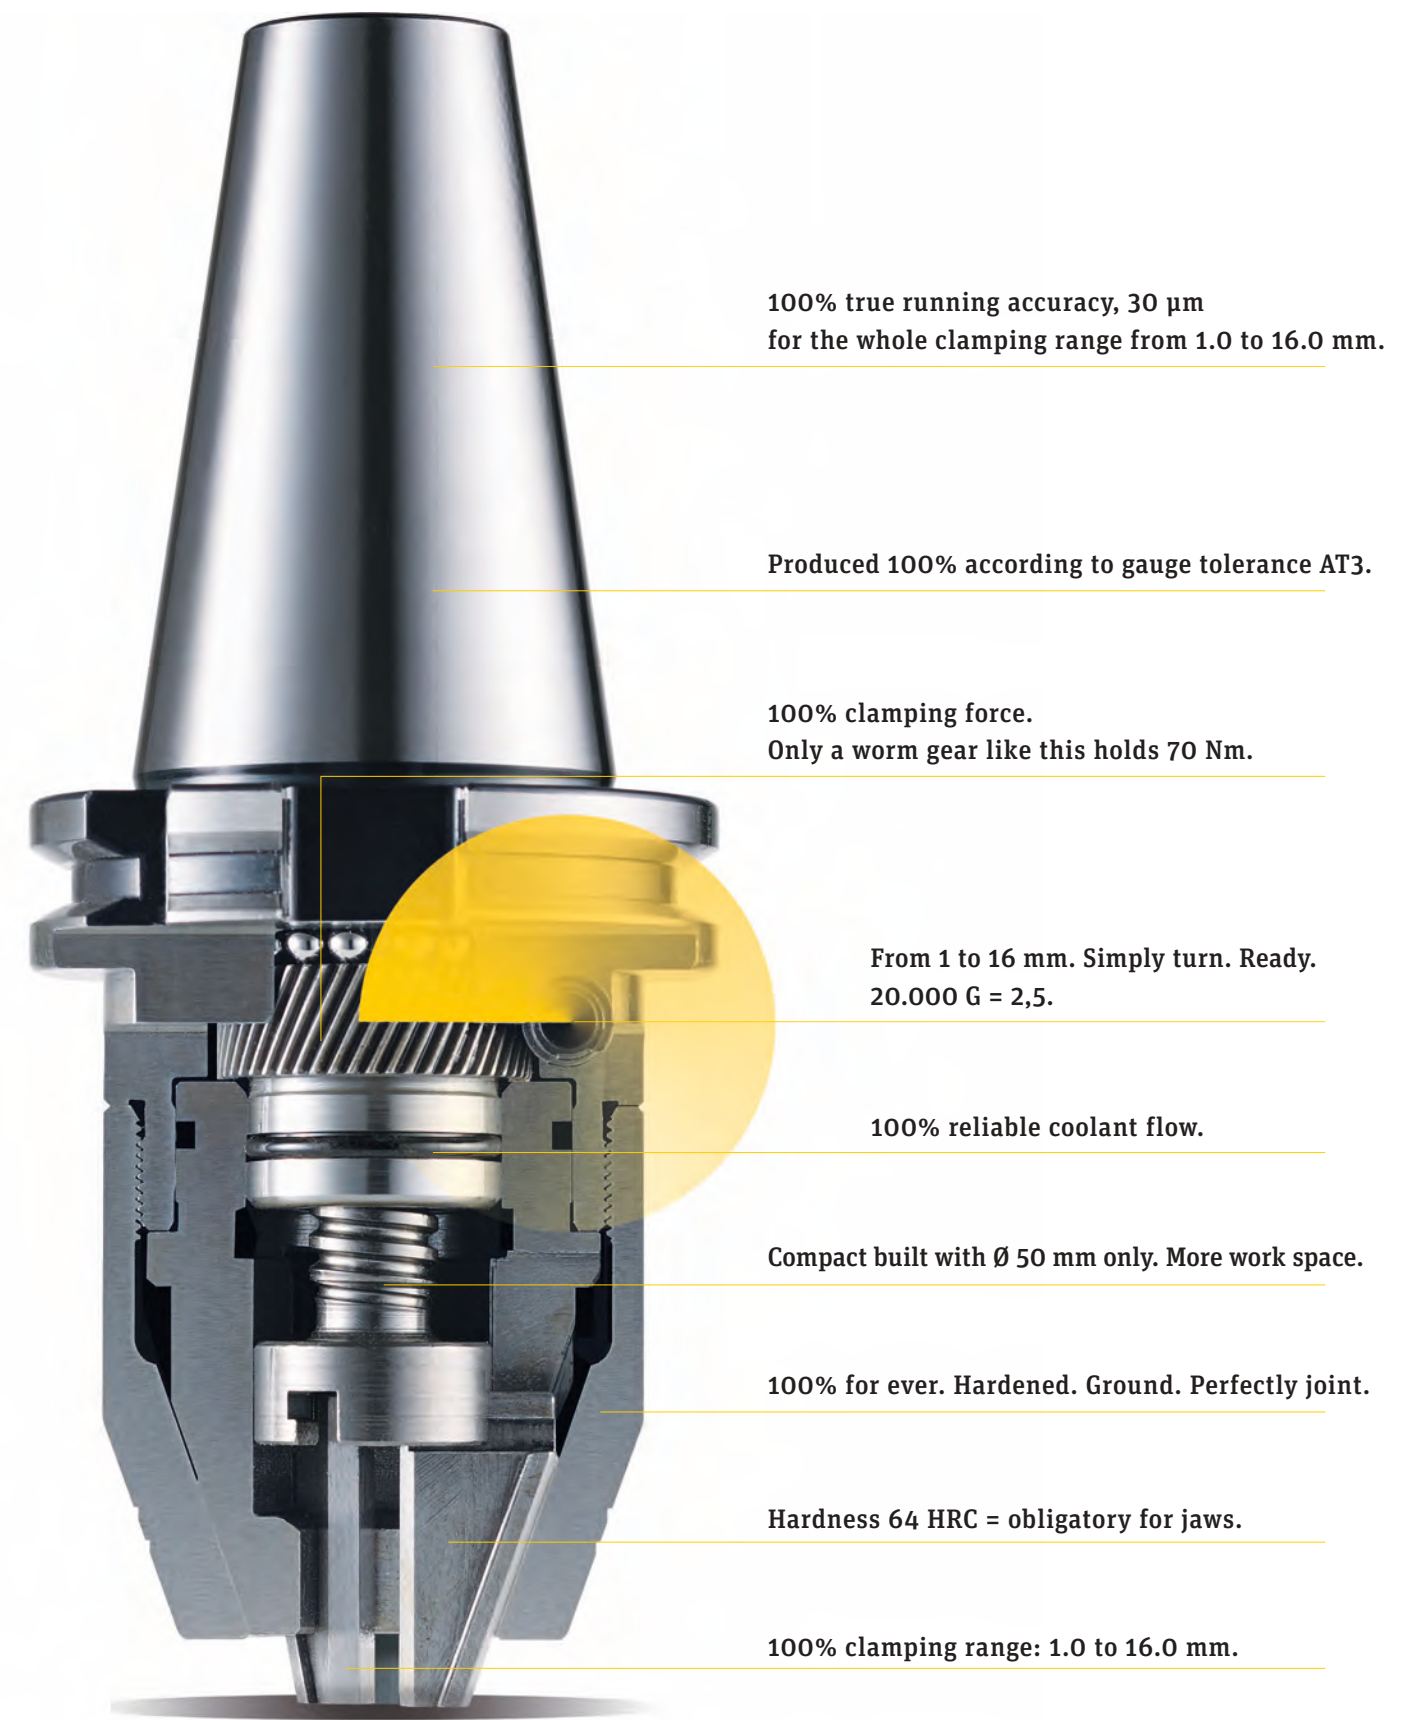

The CNC Drill Chuck in width and heights

Easy exchange of tools by setting of included hex-key. Highset clamping force by worm gear with high gear ratio. System-Runout-Accuracy 30 µm over the complete clamping range from 1,0 to 16 mm. Clamping cylindrical shanks according to DIN 1835 A. For drilling, countersinking, reaming, threading and for finishing. All significant parts are hardened and ground. Made in gauge tolerance AT3.

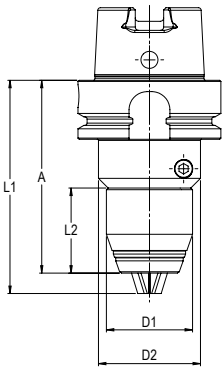

SK

1 – 16 mm										
	A	Form	Part. No	L1	L2	D1	D2	Balanced	kg	
DIN 2080-A40	73	A	800 1160 140 0	85	-	50	-	20.000 G=2,5	1,44	
DIN 2080-A50	77	A	800 1160 150 0	85	-	50	-	20.000 G=2,5	3,44	



0,5 – 10 mm										
	A	Form	Part. No	L1	L2	D1	D2	Balanced	kg	
DIN 69871-AD30	69	A/AD	800 110Z 230 0	78	37,5	38	45	20.000 G=2,5	0,70	
DIN 69871-AD40	69	A/AD	800 110Z 240 0	78	37,5	38	45	20.000 G=2,5	1,15	

Corresponding ISO 7388-1



1 – 16 mm										
	A	Form	Part. No	L1	L2	D1	D2	Balanced	kg	
DIN 69871-AD40	80	A/AD	800 116Z 240 0	92	-	50	-	20.000 G=2,5	1,46	
DIN 69871-AD50	80	A/AD	800 116Z 250 0	92	-	50	-	20.000 G=2,5	3,36	

Corresponding ISO 7388-1



HSK

0,5 – 10 mm										
	A	Form	Part. No	L1	L2	D1	D2	Balanced	kg	
DIN 69893 HSK 50 A	94	A	800 110Z 650 0	103	38	38	45	20.000 G=2,5	0,91	
DIN 69893 HSK 63 A	85	A	800 110Z 663 0	94	38	38	45	20.000 G=2,5	1,08	


Coolant tubes see page 79



1 – 16 mm										
	A	Form	Part. No	L1	L2	D1	D2	Balanced	kg	
DIN 69893 HSK 50 A	107	A	800 116Z 650 0	119	-	50	-	20.000 G=2,5	1,27	
DIN 69893 HSK 63 A	98	A	800 116Z 663 0	110	-	50	-	20.000 G=2,5	1,46	
DIN 69893 HSK 63 F	98	A	800 116F 663 0	110	-	50	-	20.000 G=2,5	1,47	
DIN 69893 HSK 80 A	101	A	800 116Z 680 0	116	-	50	-	20.000 G=2,5	2,20	
DIN 69893 HSK 80 A	104	A	800 116Z 610 0	116	-	50	-	20.000 G=2,5	2,91	

Coolant tubes see page 79




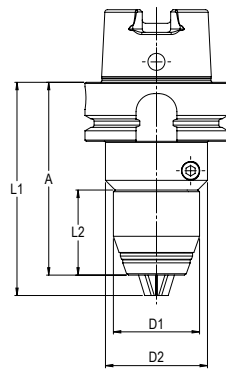

Polygon

1 – 16 mm

	A	Form	Part. No	L1	L2	D1	D2	Balanced	kg
C6/ ISO 26623-1	85	A	800 116Z 9C6 0	97	-	50	-	20.000 G=2,5	1,46
C8/ ISO 26623-1	95	A	800 116Z 9C8 0	107	-	50	-	20.000 G=2,5	2,80

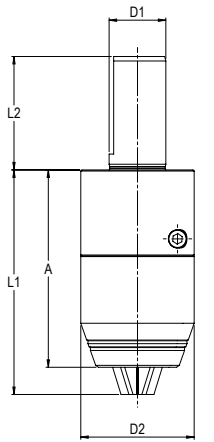

Morse

1 – 16 mm

	A	Form	Part. No	L1	L2	D1	D2	Balanced	kg
DIN 228-MK3	87	-	800 1160 MK3 0	99	-	50	-	-	1,28



MAS-BT

0,5 – 10 mm

	A	Form	Part. No	L1	L2	D1	D2	Balanced	kg
BT30 AD	72	A/AD	800 110Z 430 0	81	38	38	45	20.000 G=2,5	0,71
BT40 AD	77	A/AD	800 110Z 440 0	86	38	38	45	20.000 G=2,5	1,34

Corresponding ISO 7388-2 (JIS B 6339)



Cylindrical

1 – 16 mm

	A	Form	Part. No	L1	L2	D1	D2	Balanced	kg
Cylindrical Shank	87	Central	800 116Z 825 0	99	50	25	50	-	1,24



1 – 16 mm

	A	Form	Part. No	L1	L2	D1	D2	Balanced	kg
BT40 AD	88	A/AD	800 116Z 440 0	100	-	50	-	20.000 G=2,5	1,62
BT50 AD	99	A/AD	800 116Z 450 0	111	-	50	-	20.000 G=2,5	3,47

Corresponding ISO 7388-2 (JIS B 6339)



VDI

1 – 16 mm

	A	Form	Part. No	L1	L2	D1	D2	Balanced	kg
DIN 69880-30	87	Central	800 116Z 730 0	99	55	30	50	-	1,78
DIN 69880-40	87	Central	800 116Z 740 0	99	63	40	50	-	2,55



Conclusion:
7.5 m* daily add up
to 4.2 days a year you
Save. In addition a
much higher quality.

*** 7.5 minutes daily = 4.2 days per year. How we calculate this.**
Aside from the increase in quality of your work.

Using collets:

1. Loosening of nut. 2. pull out tool. 3. press collet from sleeve nut. 4. clean collet, sleeve nut and inner cone.
5. Press collet into sleeve nut. 6. Screw sleeve nut with collet onto the clamping chuck.
7. Insert tool. 8. Clamp sleeve nut with key. = 60 seconds

With an Albrecht CNC chuck

1. key unlocks. 2. pull out tool. 7. insert tool. 1. key locks. = 15 seconds

Time advantage Albrecht CNC chuck + 45 seconds

10 tool changes per day - time advantage + 450 seconds

450 seconds = 7.5 m daily x 250 working days = 1.875 m : 60 = 31.25 h : 7.5 h a day = 4.17 days



Balancing Screws

Balancing Screws- Set, inclusive case, key, difference-table and 180 pieces of fine-balancing-screws

Universal use, suitable for all brands. 9 different screws in fine graduation. 20 screws of each size and Torx key. Different colours for visual identification. Precise balancing together with the clamped tool. Easy handling with Torx. Supplied with Torx ISR15 screwdriver. No need for screw locking. The balancing machine calculates automatically position and weight. Suitable for multiple uses.

- Fine balancing of toolholders:**
- > together with the clamped tool
 - > added Chip
 - > operating conditions, especially with high rpm

Typ	Part.No.
M6x4,0-8,0	139 4006 000 0



Balancing Screws			
Typ	Part.No.	Amount	Colour
M6x4,0	139 4006 040 0	20	black
M6x4,5	139 4006 045 0	20	silver
M6x5,0	139 4006 050 0	20	rot
M6x5,2	139 4006 052 0	20	yellow
M6x6,0	139 4006 060 0	20	black
M6x6,5	139 4006 065 0	20	silver
M6x7,0	139 4006 070 0	20	red
M6x7,2	139 4006 072 0	20	yellow
M6x8,0	139 4006 080 0	20	black

Accessories HSK

Coolant tubes	
DIN 69893 (HSK)	Part. No
Coolant tubes HSK-A50	139 0002 650 0
Coolant tubes HSK-A63	139 0002 663 0
Coolant tubes HSK-A80	139 0002 680 0
Coolant tubes HSK-A100	139 0002 610 0



Key with T-handle	Part. No
for coolant tubes HSK-A50	139 0020 650 0
for coolant tubes HSK-A63	139 0020 663 0
for coolant tubes HSK-A80	139 0020 680 0
for coolant tubes HSK-A100	139 0020 610 0



Mountingsystem

flexible, vertical/horizontal, locked



Mounting System Base Unit	Part.No.
	730 1000 000 0



Adaptor	Part.No.
ISO 7388-1 + ISO7388-2	
SK30 + BT30	730 1000 230 0
SK40 + BT40 + CAT40	730 1000 240 0
SK50 + BT50 + CAT50	730 1000 250 0
DIN 69893	
HSK50 Form A+C	730 1000 650 0
HSK63 Form A+C	730 1000 663 0
HSK80 Form A+C	730 1000 680 0
HSK100 Form A+C	730 1000 610 0
ISO 26623-1	
PSC50	730 1000 9C5 0
PSC63	730 1000 9C6 0
PSC80	730 1000 9C8 0



Handling APC and Ultra


The Albrecht chuck is high precision toolholder with clamping gear. Its unique design provides a very high clamping force, run-out accuracy as well as a positive dampening feature for machining (milling, drilling, reaming, tapping, heavy-duty cutting, finish milling, HSC operations). The Chuck uses a special collet to clamp the cutting tool and is operated by a hex key on the periphery.



Cleaning, insert the Collet
Before each use, clean the inner cone chuck free cloth and chuck cone cleaner. Attention, do not work with compressed air during the cleaning process, as otherwise dissolved dirt particles can get into parts of the gearbox.



For maximum clamping forces, the bore, the tool shank, the cone of the clamping sleeve and the inner cone chuck must be degreased each time the tool is changed.

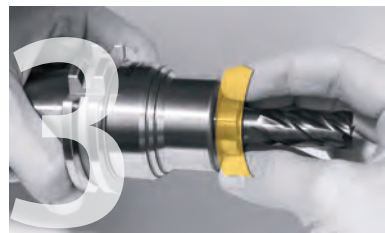

Insert the cleaned and undamaged tool shank into the clamping sleeve, observing the minimum clamping depth, see page 83. Screw the clamping sleeve with tool into the chuck manually until the clamping sleeve touches the cone.



Clamping
The chucking procedure starts by engaging the screw on the side of the chuck and rotating the hex key clockwise. Max. clamping torque see product-marking. Put in the hex key as far as possible. Hex tool surface is to be inspected about damages!



Match the two arrowheads when clamping.



Releasing
Open the Chuck by turning the hex key counter-clockwise.
Note: when opening the chuck you must overcome two resistance points. First, you will overcome the friction torque and then the collet is loosened. Then open until the tool can be taken out, respectively the collet can be unscrewed manually.



Length adjustment
A length stop screw is located in the collet and can be adjusted with a hex key. For operation from the back through the chuck with taper shank a bolt with a through hole is necessary (form AD). The range of the length adjustment is 11mm.

Technical Data Type	Clamping-Diameter, Ø mm / Ø zoll		Min. Clamping Depth	Max. Clamping Depth
14/20	2 - 5	1/8" - 3/16"	17	66
	6	1/4"	22	40
	7 - 10	5/16" - 3/8"	30	50
	11 - 15	7/16" - 9/16"	38	50
20	16 - 20	5/8" - 3/4"	38	48,5
25	12,7	1/2"	47	54,5
	16 - 32	5/8" - 1 1/4"	47	60

Balancing grade
Each Albrecht Chuck is fine-balanced without collet and tool according to the laser marking. Higher balancing quality and rpm on request. The use of shanks with slots influences the balancing grade and run-out accuracy of the whole system.

Fine balancing with balancing-screws
Some of the APCs and all Ultra-Chucks are equipped with balancing threads and are thus capable of being balanced. By using fine balance screws, an even higher overall balancing quality can be achieved. The balancing screws must be tightened hand tight to the thread base according to the recommended weight and thread position of the balancing machine. Several screws can be screwed in one bore. An additional screw locking is not necessary. Make sure that the screws do not protrude beyond the interference contour.
The max. operating speed is not affected by the use of fine balance screws. Recommendation: Albrecht M6 Balancing-set, Art. No.: 139 4006 000 0 (see page 78).

Maintenance
The Chuck is maintenance free over his lifetime. Clean chuck (especially the inner cone) and collet including thread after usage with a solvent base cleaner. According to contamination the cleaning cycles have to be adjusted. After cleaning, apply a thin coat of anticorrosive.

Repairs
In order to guarantee the precision of the tool, any chuck in need of repair has to be sent to the manufacturer or to an authorized national agent only. We recommend checking the chuck and the collet for run-out deviations and gripping torque periodic, especially after a tool break or crash.

Handling Micro

The Albrecht Micro Chuck is a high precision toolholder with an integrated clamping screw. Its unique design provides a high run-out accuracy as well as a positive dampening feature for clamping of tools with cylindrical shafts for machining (milling, finish-milling, HSC-milling, drilling, tapping, reaming). The Micro uses a special collet to clamp the cutting tool and is operated by a hex key from the behind.



Cleaning, insert the Collet
Before each use, clean the tool shaft, inner-cone of Micro and collet. To completely remove grease and dirt particles use a lint-free cloth and a cleaner. Attention, do not work with compressed air during the cleaning process, as otherwise dissolved dirt particles can get into parts of the gearbox.



For maximum clamping forces, the bore, the tool shank, the cone of the clamping sleeve and the inner cone chuck must be degreased each time the tool is changed.



Insert the cleaned and undamaged tool shank into the clamping sleeve, observing the minimum clamping depth, see page 85. Screw the clamping sleeve with tool into the chuck manually until the clamping sleeve touches the cone.



Clamping
Put in the hex key as far as possible. Hex tool surface is to be inspected for damages! The chucking procedure start with inserting the hex key from behind through the chuck and rotating the hex key clockwise. Max. clamping torque see mark on the Micro. Use only the original Albrecht clamping key which is included or the torque key, 3,0 - 5,4 Nm, part.no 139 0005 900 0, see page 61.



Releasing
Open the Micro by turning the hex key counter-clockwise. Note: when opening the Micro, you must overcome two resistance points. First, you will overcome the friction torque and then the collet is loosened. Then open until the tool can be taken out, or rather the collet can be unscrewed manually.

Clamping depth
depending on clamping diameter

Ø	t min	t max
2-4	18	36
5	18	28
6	26	36

Min. Clamping depth = t min
Max. Clamping depth = t max

Max. rpm see product-marking
Max. operation temperature: 110°C
Max. coolant pressure: 100 bar

Balancing grade
Each Albrecht Micro-Chuck is fine-balanced without collet and tool according to the laser marking Higher balancing quality and rpm on request. The use of shanks with slots influences the balancing grade and run-out accuracy of the whole system.

Maintenance
The Micro-Chuck is maintenance free over his lifetime. Clean chuck (especially the inner cone) and collet including thread after usage with a solvent base cleaner. According to contamination the cleaning cycles have to be adjusted. After cleaning, apply a thin coat of anticorrosive.

Repairs
In order to guarantee the precision of the tool, any chuck in need of repair has to be sent to the manufacturer or to an authorized national agent only. We recommend checking the Micro-Chuck and the collet for run-out deviations and gripping torque periodic, especially after a tool break or crash.

Assessment of tool holder performance in roughing with end mills

Abstract

Tool holders are an important power train component of milling with shaft tools having a high impact on dynamic process behaviour and process results. This leads to a significant demand among industrial companies for scientifically proven methods to analyse tool holders which are easy to use as well. Different approaches were applied in order to meet these demands. The dynamic vibrational behaviour of different clamping mechanisms is investigated using tool holders of similar dimensions. First, the resonance frequencies of the tool holders are identified from dynamic compliance measurements in the machine tool. Subsequently, the dynamic process behaviour is investigated by peripheral milling tests in which vibrations of tool and tool holder are detected by acceleration sensors and microphones. Analysis of the sensor data and optical analysis of the manufactured surface reveal a significant influence of the particular clamping mechanism, superimposed by certain geometrical variations of the investigated tool holders. Chatter frequencies occurring during milling tests seem independent of the clamping mechanism respectively the particular tool holder and are caused by the tool or machine-tool components. They correspond roughly with the natural frequencies identified before. Chatter intensity and spindle speeds, at which chatter occurs, are influenced by the tool holders. The occurrence of chatter vibrations correlates with a significant drop in the surface quality of the workpiece. High resonance frequencies of the tool holder excited by chatter and low-frequency waviness observed on the machined surface are related. The well-known phenomenon can be explained under rough milling conditions by a 2D-model-based superposition of subsequent cutting edge engagements. This in turn may enable dynamic analysis and optimisation of rough milling operations by easy to use shop floor equipment in future.


Keywords Tool holders · Dynamic behaviour · Surface formation · Frequency analysis · Shaft tools · Steel milling

Investigated tool holder systems:



Fig. 1 Examples of the investigated tool holder systems

Table 1 Main properties of the investigated tool holders

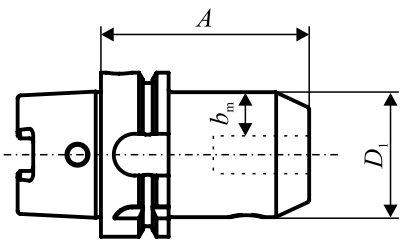

Test setup:

Machine: MC12 by Gebr. Heller
Tool: torus cutter, D=12, number of teeth=4
Material: Steel, 42CrMo4 (1.7225)

Cutting Parameter:
 $n = 3979 \text{ rev/min}$
 $f_z = 0,04 \text{ mm/rev/tooth}$
 $a_e = 7 \text{ mm}$
 $a_p = 18 \text{ mm}$

Tool holder	A [mm]	mass m [g]	D_1 [mm]	b_m [mm]	Design
APC	92	1457	40	18	Modular
ER	100	1274	42	12.5	Modular
HE	90	1123	32	9	Monolithic ^a
TS	90	918	24	8	Monolithic ^a
Weldon	80	1120	42	15	Monolithic ^b

^aFull-periphery clamping

^bPoint-line clamping

Correlation between in-process vibrations and surface quality:

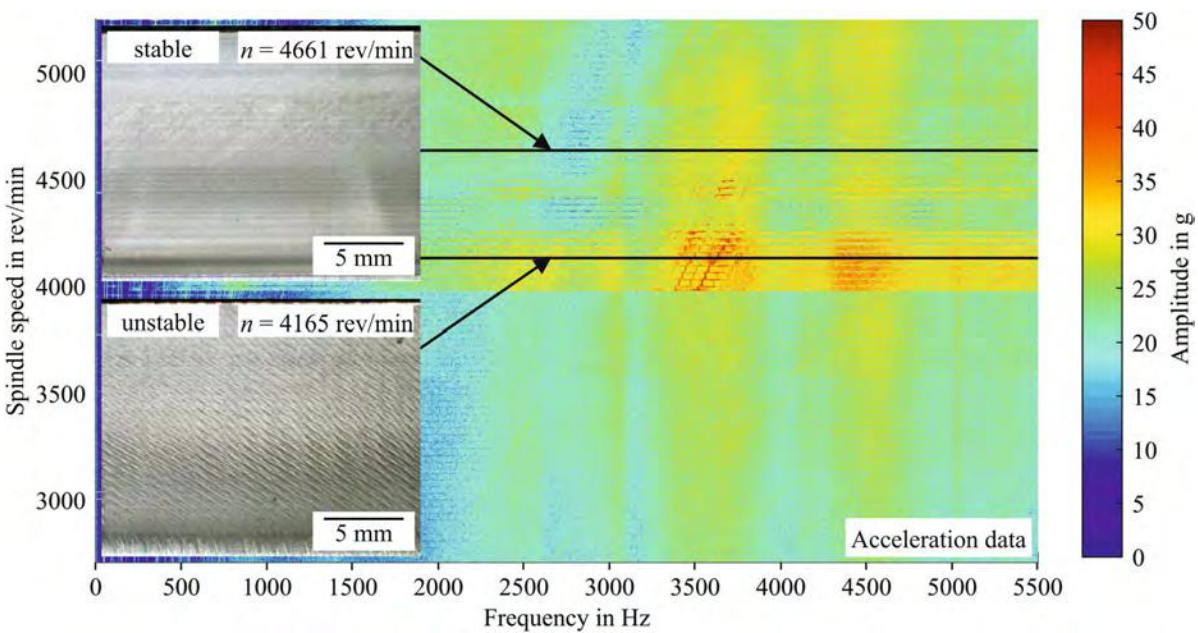


Fig. 7 Correlation between in-process vibrations and surface quality. (Tool holder: ER-collet, $n = 2708 - 5250 \text{ rev/min}$, $f_z = 0.04 \text{ mm/rev/tooth}$, $a_e = 7 \text{ mm}$, $a_p = 18 \text{ mm}$)

APC with best results in comparison to other tool-holders:

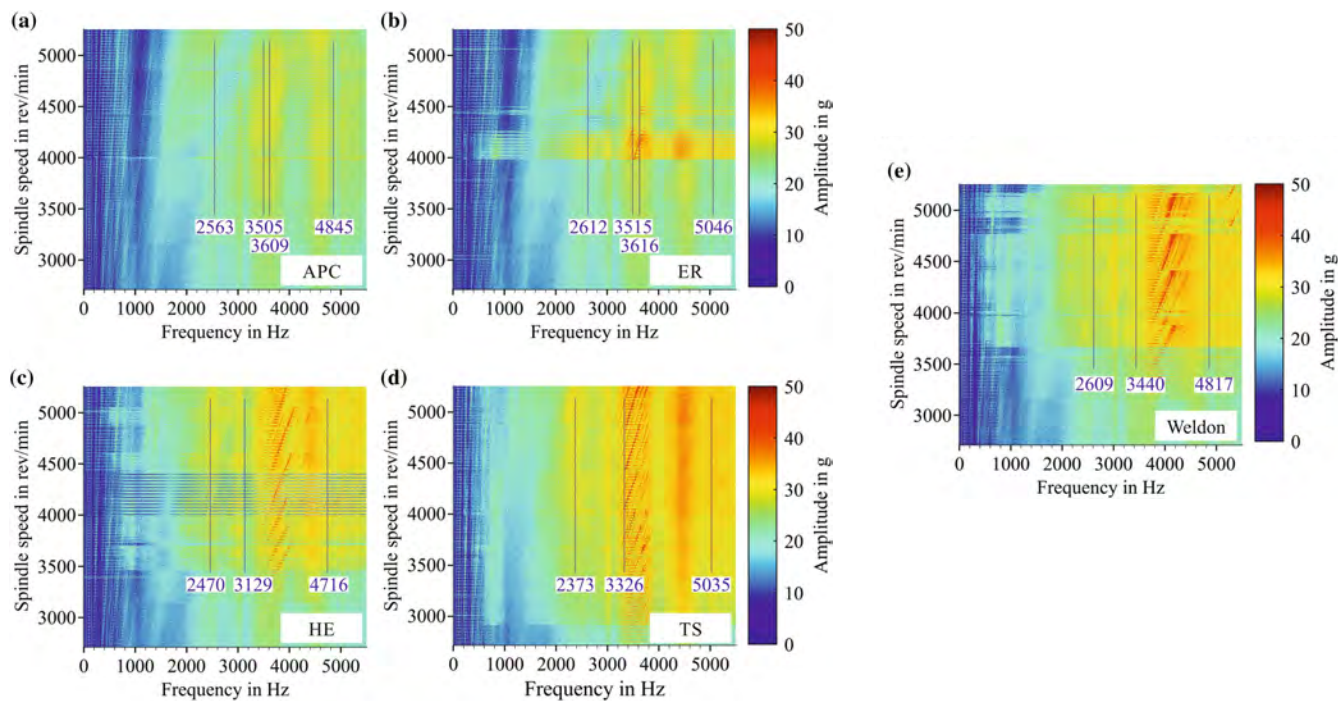


Fig. 6 Visualisation of in-process vibrations using Campbell diagrams based on acceleration sensor data. ($n = 2708 - 5250 \text{ rev/min}$, $f_z = 0.04 \text{ mm/rev/tooth}$, $a_e = 7 \text{ mm}$, $a_p = 18 \text{ mm}$)



All dimensions in
Millimeter.
We reserve the right
for changes in design
due to technical
improvements.
Pictures and dimen-
sions not binding.

Albrecht Germany
Version 4 1/2021

ALBRECHT
PRÄZISION
GmbH & Co. KG

D-73249 Wernau
Antoniusstraße 25
T +49 7153 / 3006-0
F +49 7153 / 300611
info@albrecht-germany.com
www.albrecht-germany.com

ALBRECHT
Precision Chucks

An APC from Albrecht

At present APC is the best performing chuck worldwide in the area of speed, tool life and safety.

HSK50, HSK63, HSK80, HSK100, HSK125, SK30, SK40, SK50, BT30, BT40, BT50, PSC50, PSC63, PSC80, BT40 and BT50 with additional face contact.

The Slim5

The power for 5-axis operation. Achieve anything safely and with speed.

Clamping range 2-14 mm or 2-20 mm.
Slim Front, gage length= 120 mm (HSK63 + BT40).
No tool pull-out due to pin-lock collets.
Extremely slim tapered, 4,5°.
High accuracy and dampening.
Optimal power transmission.
100% leak proof and up to 100 bars also with internal coolant supply for the tools.
Ultimate additional cooling and rinsing effect due to peripheral cooling.




These wins have reasons.

1. The world's only Milling Chuck with 1:16 worm gear.

Patent no. 1206990.
The only way how 100% holding force gets to the cutting tool.

2. Highest rigidity thanks to design and body.

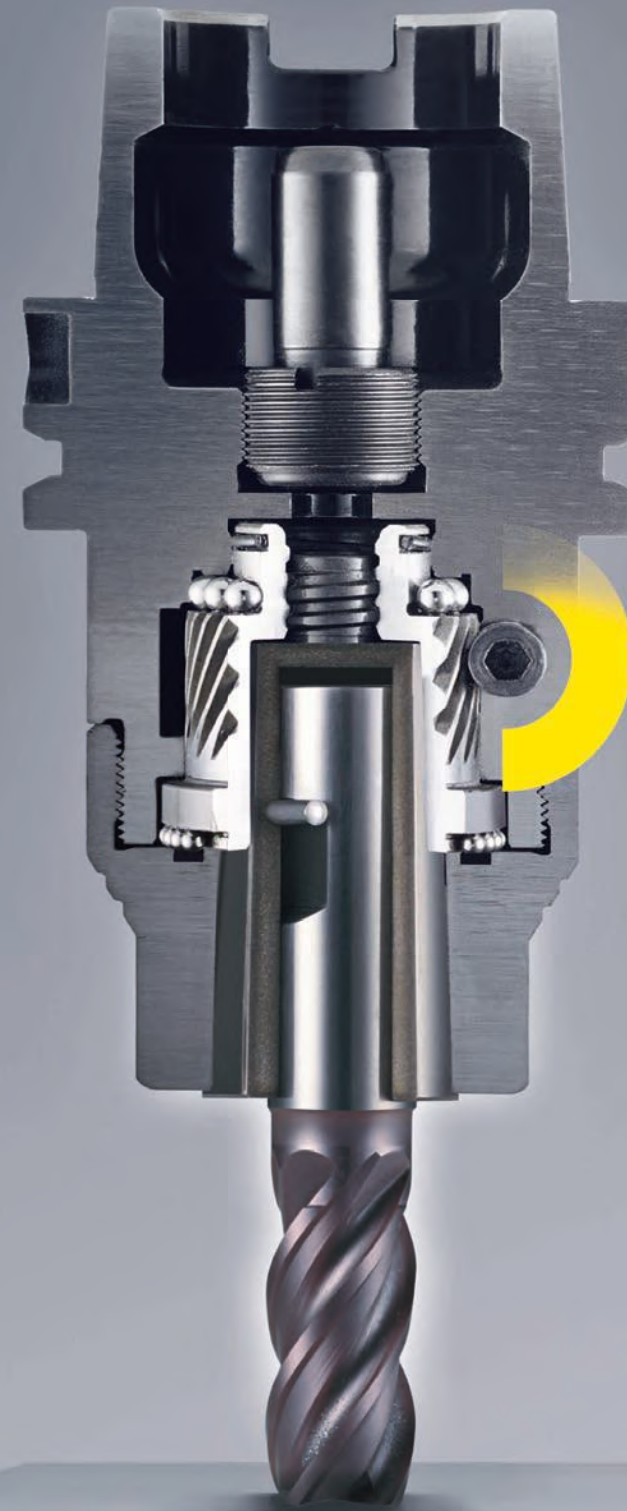


3. The worm gear with 3 tons traction force and the collet with a slow-taper angle of 1,25° do guide the tool perfectly through trochoidal-, dry- and hard-machining operations up to 110° C.

4. Ideal dampening. The collet-cone assemblage absorbs virtually all vibrations. Measuring portfolio from Institut for Produktionsmanagement and -technik Technische Universität Hamburg see page 74 - 75

HSK

Precision Chucks APC, DIN 69893 (DIN ISO 12164) with fine balancing holes 6xM6

Easy exchange of tools by setting of hex-key (see page 41). Maintenance free.
Sealed against coolant and contamination. Slow collet taper angle. Collet
with special coating (see page 26 – 39). System-Runout-Accuracy 3 µm at 2,5 x D.
Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB,
HA as well as HE up to D = 20 mm.

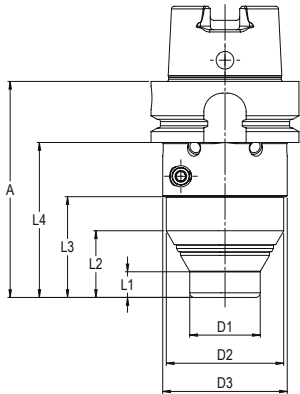

HSK50 A											2 – 14 mm
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
101	300 014Z 650 0	A	11	28	43	75	30	50	53	20.000 G=2,5	1,1
HSK63 A											
92	300 014Z 663 0	A	11	28	43	66	30	50	53	20.000 G=2,5	1,3

HSK50 A											2 – 14 mm
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
187	300 214Z 650 0	A	85	103	142	161	30	50	53	20.000 G=2,5	1,9
HSK63 A											
142	300 514Z 663 0	A	61	78	93	116	30	50	53	20.000 G=2,5	1,5
178	300 214Z 663 0	A	85	103	129	152	30	50	53	20.000 G=2,5	1,9

HSK50 A											2 – 20 mm
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
101	300 120Z 650 0	A	20	31	56	75	40	53		20.000 G=2,5	1,1
HSK63 A											
92	300 120Z 663 0	A	20	31		66	40	53		20.000 G=2,5	1,3
HSK63 F											
92	300 120F 663 0*	F	20	31		66	40	53		20.000 G=2,5	1,3
HSK80 A											
98	300 120Z 680 0	A	18	38		72	40	63		20.000 G=2,5	1,8
HSK100 A											
100	300 020Z 610 0	A	18	38	43	71	40	63	70	20.000 G=2,5	3,8

*Delivery includes sealing plug in HSK

HSK63 A											2 – 20 mm
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
142	300 520Z 663 0	A	69	81		116	40	53		20.000 G=2,5	1,7
178	300 220Z 663 0	A	94	105		152	40	53		20.000 G=2,5	2,0
HSK100 A											
150	300 820Z 610 0	A	48	68	93	121	40	63	70	20.000 G=2,5	4,2
186	300 920Z 610 0	A	84	104	129	157	40	63	70	20.000 G=2,5	4,5




HSK63 A											16 – 32 mm
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
132	300 025Z 663 0	A	90	106			63			20.000 G=2,5	2,2
HSK80 A											
137	300 025Z 680 0	A	111				63			20.000 G=2,5	2,5
HSK100 A											
139	300 025Z 610 0	A	110				70			20.000 G=2,5	4,7
HSK125 A											
145	300 025Z 612 0	A	116				70			20.000 G=2,5	6,0

Slim5

Precision Chucks APC, DIN 69893 (DIN ISO 12164) with fine balancing holes 6xM6

Slim line with 4,5° especially for 5-axis operations. Easy exchange of tools by setting of
hex-key (see page 41). Maintenance free. Sealed against coolant and contamination.
Slow collet taper angle. Collet with special coating (see page 26 – 39). System-Runout-
Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and
DIN 6535 HB, HA as well as HE up to D = 20 mm.

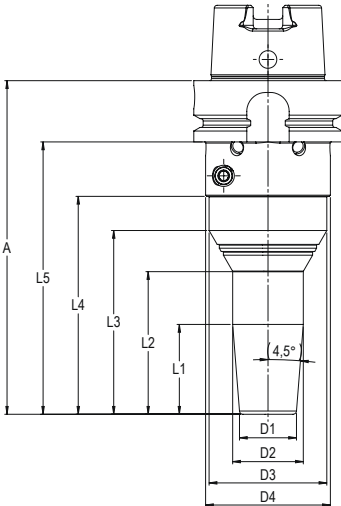


HSK63 A Slim 5												2 – 14 mm	
A	Part.No.	Form	L1	L2	L3	L4	L5	D1	D2	D3	D4	Balanced	kg
120	300 414Z 663 0	A		38	56	71	94	24	30	50	53	20.000 G=2,5	1,4
142	300 414Z 663 1	A	38	61	78	93	116	24	30	50	53	20.000 G=2,5	1,5

HSK63 A Slim 5												2–20 mm	
A	Part.No.	Form	L1	L2	L3	L4	L5	D1	D2	D3	D4	Balanced	kg
120	300 420Z 663 0	A		44	54	71	94	32	39	50	53	20.000 G=2,5	1,5
142	300 420Z 663 1	A	51	69	78	93	116	32	40	50	53	20.000 G=2,5	1,6

Precision Chucks APC, ISO 7388-1 (DIN 69871)

Easy exchange of tools by setting of hex-key (see page 41). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 26 – 39). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA as well as HE up to D = 20 mm.

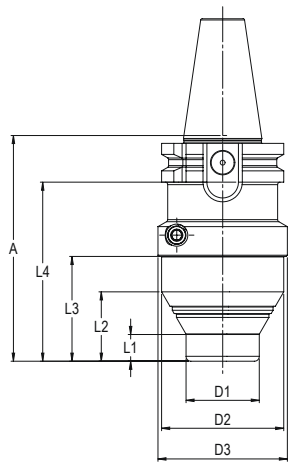

SK302 – 14 mm										
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced kg
92	300 014Z 230 0	A/AD	11	28		73	30	50	53	20.000 G=2,5 1,0
SK40										
63	300 014Z 240 0	A/AD	11	28		43	30	50		20.000 G=2,5 1,1

SK302 – 14 mm										
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced kg
142	300 514Z 230 0	A/AD	61	78		123	30	50	53	20.000 G=2,5 1,4
SK40										
112	300 514Z 240 0	A/AD	61	78		93	30	50		20.000 G=2,5 1,3
149	300 914Z 240 0	A/AD	85	103		129	30	50		20.000 G=2,5 1,7

SK302 – 20 mm										
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced kg
92	300 120Z 230 0	A/AD	20	28		73	40	53		20.000 G=2,5 1,1
SK40										
63	300 020Z 240 0	A/AD	20	28		43	40	50		20.000 G=2,5 1,1
SK50										
62	300 020Z 250 0	A/AD	18	38		43	40	63		20.000 G=2,5 3,1

SK402 – 20 mm										
A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced kg
112	300 520Z 240 0	A/AD	69	78		93	40	50		20.000 G=2,5 1,6
149	300 920Z 240 0	A/AD	94	103		129	40	50		20.000 G=2,5 1,9
SK50										
112	300 820Z 250 0	A/AD	48	68		93	40	63		20.000 G=2,5 3,5
149	300 920Z 250 0	A/AD	84	104		129	40	63		20.000 G=2,5 3,8



SK4016 – 32 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
102	300 025Z 240 0	A/AD	*			83	63			20.000 G=2,5	2,1
SK50											
102	300 025Z 250 0	A/AD				83	70			20.000 G=2,5	4,3


* without Safety Zone, with Safety Zone see Part. No. 300 025Z 240 1 (on request).



Slim5

Precision Chucks APC, ISO 7388-1 (DIN 69871)

Slim line with 4,5° especially for 5-axis operations. Easy exchange of tools by setting of hex-key (see page 41). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 26 – 39). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA as well as HE up to D = 20 mm.

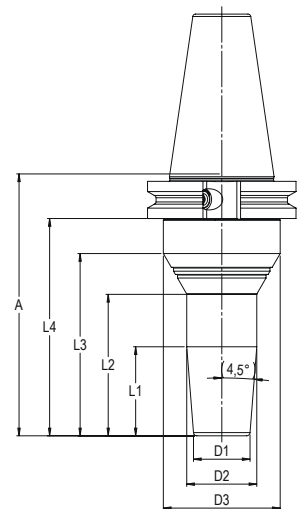

SK40 Slim52 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
91	300 414Z 240 0	A/AD		38	56	71	24	30	50	20.000 G=2,5	1,2
SK50											
112	300 414Z 240 1	A/AD	38	61	78	93	24	30	50	20.000 G=2,5	1,3

SK40 Slim52 – 20 mm


A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
91	300 420Z 240 0	A/AD		44	54	71	32	39	50	20.000 G=2,5	1,3
SK50											
112	300 420Z 240 1	A/AD	51	69	78	93	32	40	50	20.000 G=2,5	1,4



MAS-BT

Precision Chucks APC, ISO 7388-2 (JIS B 6339)

Easy exchange of tools by setting of hex-key (see page 41). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 26 – 39). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA as well as HE up to D = 20 mm.

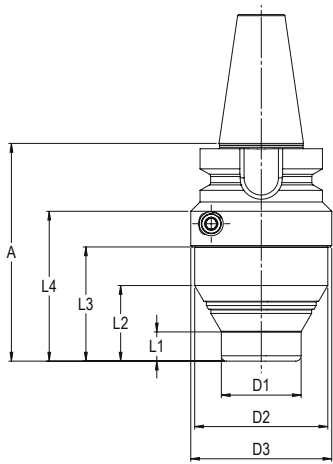

BT30 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
82	300 014Z 430 0	A/AD	11	28	43	56	30	50	53	20.000 G=2,5	0,9

BT40											
70	300 014Z 440 0	A/AD	11	28		43	30	50		20.000 G=2,5	1,2

BT40 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
120	300 514Z 440 0	A/AD	61	78		93	30	50		20.000 G=2,5	1,5
156	300 914Z 440 0	A/AD	85	103		129	30	50		20.000 G=2,5	2,0

BT30 2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
82	300 120Z 430 0	A/AD	20	31		56	40	53		20.000 G=2,5	0,9

BT40											
70	300 020Z 440 0	A/AD	18	38			40	63		20.000 G=2,5	1,4

BT50											
81	300 020Z 450 0	A/AD	18	38		43	40	63		20.000 G=2,5	4,2

BT40 2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
120	300 520Z 440 0	A/AD	48	68			40	63		20.000 G=2,5	1,8
156	300 920Z 440 0	A/AD	84	104			40	63		20.000 G=2,5	2,1

BT50											
131	300 820Z 450 0	A/AD	48	68		93	40	63		20.000 G=2,5	4,6
167	300 920Z 450 0	A/AD	84	104		129	40	63		20.000 G=2,5	4,9



BT40 16 – 32 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
110	300 025Z 440 0	A/AD					63			20.000 G=2,5	2,4


BT50											
121	300 025Z 450 0	A/AD				83	70			20.000 G=2,5	4,6



Slim5

Precision Chucks APC, ISO 7388-2 (JIS B 6339)

Slim line with 4,5° especially for 5-axis operations. Easy exchange of tools by setting of hex-key (see page 41). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 26 – 39). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA as well as HE up to D = 20 mm.

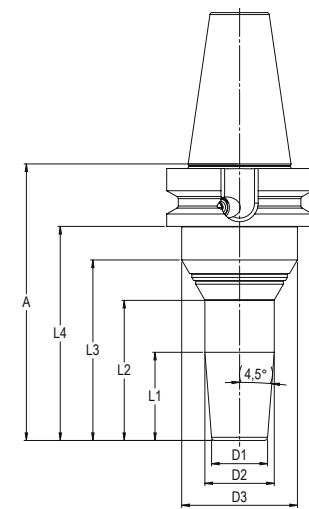

BT40 Slim5 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
98	300 414Z 440 0	A/AD		38	56	71	24	30	50	20.000 G=2,5	1,4
120	300 414Z 440 1	A/AD	38	61	78	93	24	30	50	20.000 G=2,5	1,5



BT40 Slim5 2 – 20 mm


A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
98	300 420Z 440 0	A/AD		44	54	71	32	39	50	20.000 G=2,5	1,5
120	300 420Z 440 1	A/AD	51	69	78	93	32	40	50	20.000 G=2,5	1,6



Polygon

Precision Chucks APC, DIN ISO 26623-1
with fine balancing holes 6xM6

Easy exchange of tools by setting of hex-key (see page 41). Maintenance free.
Sealed against coolant and contamination. Slow collet taper angle. Collet with
special coating (see page 26 – 39). System-Runout-Accuracy 3 µm at 2,5 x D.
Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA as
well as HE up to D = 20 mm.



PSC 63 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
80	300 014Z 9C6 0	A	11	28	43		30	50		20.000 G=2,5	1,3

PSC 50 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
127	300 514Z 9C5 0*	A	61	78	93		30	50	53	20.000 G=2,5	1,0

PSC 63

130	300 814Z 9C6 0	A	61	78	93		30	50		20.000 G=2,5	1,5
166	300 914Z 9C6 0	A	85	103	129		30	50		20.000 G=2,5	2,0

*without balancing holes

PSC 50 2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
78	300 120Z 9C5 0*	A	20	31			40	53		20.000 G=2,5	0,9

PSC 63

80	300 020Z 9C6 0	A	18	38			40	63		20.000 G=2,5	1,4
----	----------------	---	----	----	--	--	----	----	--	--------------	-----

PSC 80

90	300 020Z 9C8 0	A	18	38	43		40	63		20.000 G=2,5	3,3
----	----------------	---	----	----	----	--	----	----	--	--------------	-----

*without balancing holes

PSC 63 2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
130	300 820Z 9C6 0	A	47	68			40	63		20.000 G=2,5	1,6
166	300 920Z 9C6 0	A	84	104			40	63		20.000 G=2,5	2,2

PSC 80

140	300 820Z 9C8 0	A	47	68	93		40	63		20.000 G=2,5	3,5
-----	----------------	---	----	----	----	--	----	----	--	--------------	-----



PSC 63 16 – 32 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
119	300 025Z 9C6 0	A					63			20.000 G=2,5	2,4

PSC 80


129	300 025Z 9C8 0	A	83				70			20.000 G=2,5	3,8
-----	----------------	---	----	--	--	--	----	--	--	--------------	-----



Slim5

Precision Chucks APC, DIN ISO 26623-1
with fine balancing holes 6xM6

Slim line with 4,5° especially for 5-axis operations. Easy exchange of tools by setting
of hex-key (see page 41). Maintenance free. Sealed against coolant and
contamination. Slow collet taper angle. Collet with special coating (see page 26 – 39).
System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to
DIN 1835 A, B and DIN 6535 HB, HA as well as HE up to D = 20 mm.

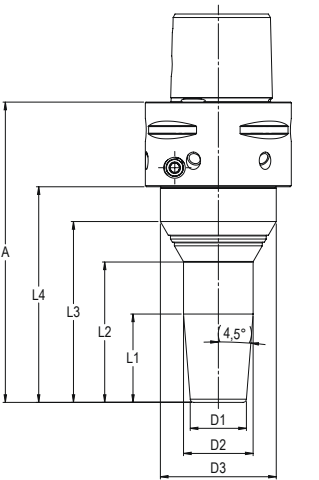

PSC 63 Slim5 2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
108	300 414Z 9C6 0	A		38	56	71	24	30	50	20.000 G=2,5	1,5
130	300 414Z 9C6 1	A	38	61	78	93	24	30	50	20.000 G=2,5	1,6



PSC 63 Slim5 2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
108	300 420Z 9C6 0	A		44	54	71	32	39	50	20.000 G=2,5	1,6
130	300 420Z 9C6 1	A	51	69	78	93	32	40	50	20.000 G=2,5	1,7






BT*

Precision Chucks APC, ISO 7388-2 with additional Flange contact.

Easy exchange of tools by setting of hex-key (see page 41). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 26 – 39). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA as well as HE up to D = 20 mm.

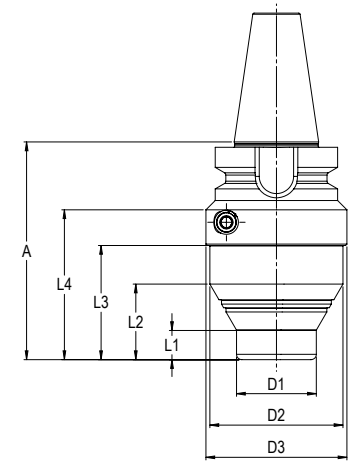

BT30*

2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
81	300 120Z 43P 0	A/AD	20	31		56	40	53		20.000 G=2,5	1,2

BT40*

69	300 020Z 44P 0	A/AD	18	38			40	63		20.000 G=2,5	1,4
----	----------------	------	----	----	--	--	----	----	--	--------------	-----

BT50*

80	300 020Z 45P 0	A/AD	18	38		43	40	63		20.000 G=2,5	4,2
----	----------------	------	----	----	--	----	----	----	--	--------------	-----



BT40*

2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
119	300 820Z 44P 0	A/AD	48	68			40	63		20.000 G=2,5	1,8

BT50*

129	300 820Z 45P 0	A/AD	48	68		93	40	63		20.000 G=2,5	4,6
-----	----------------	------	----	----	--	----	----	----	--	--------------	-----



High-End

Chuck for fine machining

This two-piece design consists of a compensating adapter and a compensating chuck. It permits an adjustment of tools to the μm , especially for long tools and projection lengths. Ideal for high precision reaming and drilling. Axial and radial adjustment is done with different setting screws. Another 6 screws are used for fine balancing. Suitable for inner coolant flow up to a pressure of 80 bar by using a small adapter sleeve between comparison adapter and chuck. The total length (gage-length) is an addition of L1 (adapter) and L4 (chuck). For more information on the handling and μ -precise adjustment see www.albrecht-germany.com



Compensating Chuck APC

Easy exchange of tools by setting of hex-key (see page 41). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 26 – 39). Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA as well as HE up to D = 20 mm. Coolant tubes see page 69.

Compensating Adapter

HSK63-Form A

Modul	Part.No.	d	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
70	300 M76Z 663 0	70	60								1,3
80	300 M86Z 663 0	80	60								1,4
100	300 M16Z 663 0	100	65								1,9

HSK100-Form A

Modul	Part.No.	d	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
70	300 M76Z 610 0	70	55								1,6
80	300 M86Z 610 0	80	55								2,8
100	300 M16Z 610 0	100	65								3,7




Compensating Chuck

2 – 20 mm

Modul	Part.No.	d	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
70	300 120Z M76 0	70	20	31	72	87	40	53	-		1,1
80	300 120Z M86 0	80	20	31	56	73	40	53	-		1,3

16 – 32 mm

Modul	Part.No.	d	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
100	300 025Z M16 0	100	83	-	97	118	63	-	-		3,1



Adapter sleeve for inner coolant flow

Modul	Part.No.	O-Ring
all	139 5004 001 0	17x1,5

Collets



Overview

Page 21-22

Collets Peripheral Coolant

Additional cooling and rinsing effect.
Increases the safety of processing.



Page 23-24

Collets Coolant 2.0

With additional channels for peripheral
cooling directly on the tool shank.



Page 25-26

Collets Internal Coolant

For tools with internal coolant.
100% leak proof up to 100 bar coolant pressure.



Page 27-30

Collets Pin-Lock

Mechanical pull stop solution in
combination with side lock shanks (Weldon)



Page 31-32

Minimum-Quantity-Lubrication MQL

Set for collets with internal coolant.
For 1- and 2-Channel-Systems.



APC collet with peripheral cooling

APC collet with peripheral cooling

Additional cooling and rinsing effect. Increases the safety of processing. Constant coolant flow of 14-16 litre/min at 50 bar coolant pressure up to D = 20 mm through the slots of the collet. Special coating. Maintenance free. Integrated, fine adjustable length stop with access from both sides. Clamping of tool shanks corresponding to DIN 1835 A, B and DIN 6535 HB, HA as well as HE up to D = 20 mm.

Collet APC14			2 – 14 mm
D	Coolant	Part.No.	kg
2	Periphery	136 1402 000 0	0,10
3	Periphery	136 1403 000 0	0,10
4	Periphery	136 1404 000 0	0,10
5	Periphery	136 1405 000 0	0,10
6	Periphery	136 1406 000 0	0,09
7	Periphery	136 1407 000 0	0,09
8	Periphery	136 1408 000 0	0,09
9	Periphery	136 1409 000 0	0,08
10	Periphery	136 1410 000 0	0,08
11	Periphery	136 1411 000 0	0,07
12	Periphery	136 1412 000 0	0,07
14	Periphery	136 1414 000 0	0,05



Collet APC20			2 – 20 mm
D	Coolant	Part.No.	kg
2	Periphery	136 2002 000 0	0,17
3	Periphery	136 2003 000 0	0,17
4	Periphery	136 2004 000 0	0,17
5	Periphery	136 2005 000 0	0,17
6	Periphery	136 2006 000 0	0,17
8	Periphery	136 2008 000 0	0,16
9	Periphery	136 2009 000 0	0,16
10	Periphery	136 2010 000 0	0,15
11	Periphery	136 2011 000 0	0,15
12	Periphery	136 2012 000 0	0,15
13	Periphery	136 2013 000 0	0,14
14	Periphery	136 2014 000 0	0,13
15	Periphery	136 2015 000 0	0,12
16	Periphery	136 2016 000 0	0,10
17	Periphery	136 2017 000 0	0,10
18	Periphery	136 2018 000 0	0,08
20	Periphery	136 2020 000 0	0,06




Collet APC25			16 – 32 mm
D	Coolant	Part.No.	kg
16	Periphery	136 2516 000 0	0,50
18	Periphery	136 2518 000 0	0,45
20	Periphery	136 2520 000 0	0,42
22	Periphery	136 2522 000 0	0,40
25	Periphery	136 2525 000 0	0,34
32	Periphery	136 2532 000 0	0,22



* Special size and inch diameter on request

Collets with Coolant 2.0

Coolant stands close to the cutting tool, up to 60% higher MRR and tool life.

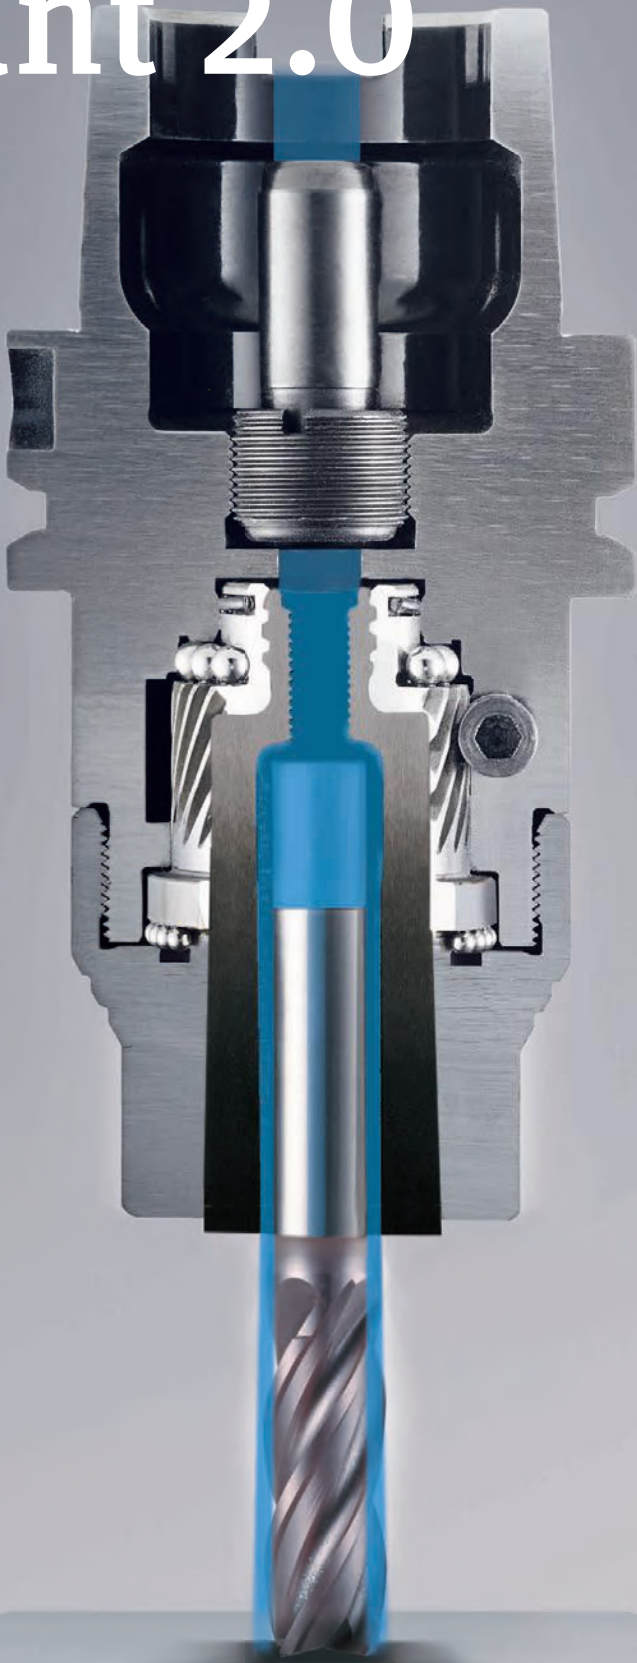

Collet APC14			2 – 14 mm
D	Coolant	Part.No.	kg
6	Coolant 2.0	136 1406 000 P	0,09
8	Coolant 2.0	136 1408 000 P	0,09
10	Coolant 2.0	136 1410 000 P	0,08
12	Coolant 2.0	136 1412 000 P	0,07



Collet APC14 with Pin-Lock			2 – 14 mm
D	Coolant	Part.No.	kg
8	Coolant 2.0 Pin-Lock	136 1408 0LO P	0,08
10	Coolant 2.0 Pin-Lock	136 1410 0LO P	0,07
12	Coolant 2.0 Pin-Lock	136 1412 0LO P	0,06



Collet APC20			2 – 20 mm
D	Coolant	Part.No.	kg
6	Coolant 2.0	136 2006 000 P	0,17
8	Coolant 2.0	136 2008 000 P	0,16
10	Coolant 2.0	136 2010 000 P	0,15
12	Coolant 2.0	136 2012 000 P	0,15
14	Coolant 2.0	136 2014 000 P	0,12
16	Coolant 2.0	136 2016 000 P	0,10



Collet APC20 with Pin-Lock			2 – 20 mm
D	Coolant	Part.No.	kg
10	Coolant 2.0 Pin-Lock	136 2010 0LO P	0,14
12	Coolant 2.0 Pin-Lock	136 2012 0LO P	0,13
14	Coolant 2.0 Pin-Lock	136 2014 0LO P	0,11
16	Coolant 2.0 Pin-Lock	136 2016 0LO P	0,10



* Special size and inch diameter on request



APC collet for tools with internal coolant

APC collet for tools with internal coolant
100% leak proof up to 100 bar coolant pressure.
Special coating. Maintenance free. Integrated, fine adjustable length stop. Clamping of tool shanks corresponding to DIN 1835 A, B and DIN 6535 HB, HA as well as HE up to D = 20 mm.

Collet APC14			2 – 14 mm
D	Coolant	Part.No.	kg
2	Central	136 1402 000 T	0,10
3	Central	136 1403 000 T	0,10
4	Central	136 1404 000 T	0,10
5	Central	136 1405 000 T	0,10
6	Central	136 1406 000 T	0,09
7	Central	136 1407 000 T	0,09
8	Central	136 1408 000 T	0,09
9	Central	136 1409 000 T	0,08
10	Central	136 1410 000 T	0,08
11	Central	136 1411 000 T	0,07
12	Central	136 1412 000 T	0,07
14	Central	136 1414 000 T	0,05



Collet APC20			2 – 20 mm
D	Coolant	Part.No.	kg
2	Central	136 2002 000 T	0,17
3	Central	136 2003 000 T	0,17
4	Central	136 2004 000 T	0,17
5	Central	136 2005 000 T	0,17
6	Central	136 2006 000 T	0,17
8	Central	136 2008 000 T	0,16
9	Central	136 2009 000 T	0,16
10	Central	136 2010 000 T	0,15
11	Central	136 2011 000 T	0,15
12	Central	136 2012 000 T	0,15
13	Central	136 2013 000 T	0,14
14	Central	136 2014 000 T	0,13
15	Central	136 2015 000 T	0,12
16	Central	136 2016 000 T	0,10
17	Central	136 2017 000 T	0,10
18	Central	136 2018 000 T	0,08
20	Central	136 2020 000 T	0,06



Collet APC25			16 – 32 mm
D	Coolant	Part.No.	kg
16	Central	136 2516 000 T	0,50
18	Central	136 2518 000 T	0,45
20	Central	136 2520 000 T	0,42
22	Central	136 2522 000 T	0,40
25	Central	136 2525 000 T	0,34
32	Central	136 2532 000 T	0,22



* Special size and inch diameter on request

Collets with Pin-Lock

APC collet with mechanical pull stop Pin-Lock

Easy mechanical pull stop solution in combination with side lock (Weldon) shanks corresponding to DIN 6535 HB and DIN 1835 B. All positive features of APC are kept like runout accuracy and dampening. Special coating. Maintenance free.

Central = for tools with internal coolant. 100% leak proof up to 100 bar coolant pressure.

Periphery = additional cooling and rinsing effect. Increases the safety of processing. Collet is supplied with 3 pins, pin punch, assembly tool. Custom designed. Balanced together with Weldonshaft and pin.



Positioning tool

Remove the length setting screw, then position the Weldon-clamping surface on the side of the bore. Now insert the tool into the collet until the Weldon-clamping surface lies in the range of the bore.



Positioning pin

The locking-pin has to be inserted with the help of the pin punch into the bore of the collet up to the block. Caution: The pin must not stick out of the collet.



Free from backlash

With the assembly tool the length stop screw has to be screwed, so that the cutting tool is free of backlash. Caution: Mounting without axial pressure. The collet with the secured tool can now be placed into the APC chuck (see APC operation manual).

Collets with Pin-Lock

APC Collet Pin-Lock with 3 pins and assembly tool.

Collet APC148 – 12 mm				
D	Coolant	Part.No.	Balanced	kg
8	Periphery	136 1408 OLO O	no	0,09
10	Periphery	136 1410 OLO O	no	0,08
12	Periphery	136 1412 OLO O	no	0,07



Collet APC148 – 12 mm				
D	Coolant	Part.No.	Balanced	kg
8	Central	136 1408 OLO T	no	0,09
10	Central	136 1410 OLO T	no	0,08
12	Central	136 1412 OLO T	no	0,07



Collet APC206 – 20 mm				
D	Coolant	Part.No.	Balanced	kg
6	Periphery	136 2006 OLO O	yes	0,17
8	Periphery	136 2008 OLO O	yes	0,16
10	Periphery	136 2010 OLO O	yes	0,15
12	Periphery	136 2012 OLO O	yes	0,15
14	Periphery	136 2014 OLO O	yes	0,13
16	Periphery	136 2016 OLO O	yes	0,10
18	Periphery	136 2018 OLO O	no	0,08
20	Periphery	136 2020 OLO O	no	0,07



Collet APC206 – 20 mm				
D	Coolant	Part.No.	Balanced	kg
6	Central	136 2006 OLO T	yes	0,17
8	Central	136 2008 OLO T	yes	0,16
10	Central	136 2010 OLO T	yes	0,15
12	Central	136 2012 OLO T	yes	0,15
14	Central	136 2014 OLO T	yes	0,13
16	Central	136 2016 OLO T	yes	0,10
18	Central	136 2018 OLO T	no	0,08
20	Central	136 2020 OLO T	no	0,07



Collet APC2516 – 32 mm				
D	Coolant	Part.No.	Balanced	kg
16	Periphery	136 2516 OLO O	yes	0,50
18	Periphery	136 2518 OLO O	yes	0,45
20	Periphery	136 2520 OLO O	yes	0,42
22	Periphery	136 2522 OLO O	yes	0,40
25	Periphery	136 2525 OLO O	yes	0,34
32	Periphery	136 2532 OLO O	no	0,22




Collet APC2516 – 32 mm				
D	Coolant	Part.No.	Balanced	kg
16	Central	136 2516 OLO T	yes	0,50
18	Central	136 2518 OLO T	yes	0,45
20	Central	136 2520 OLO T	yes	0,42
22	Central	136 2522 OLO T	yes	0,40
25	Central	136 2525 OLO T	yes	0,34
32	Central	136 2532 OLO T	no	0,22



MQL inside

MQL by Albrecht

Of course the APC Precision Chuck is also available with Minimum-Quantity-Lubrication. For 1- and 2-Channel-systems in combination with internal coolant collets. Please choose your MQL Length screw and Coolant tube alternatively 1- or 2-channel. 100% perfect matched set with MQL conform delivery at the tool shaft end with 90°. Based on MQL company standard. Insertion depth corresponding to DIN 1835 and DIN 6535.

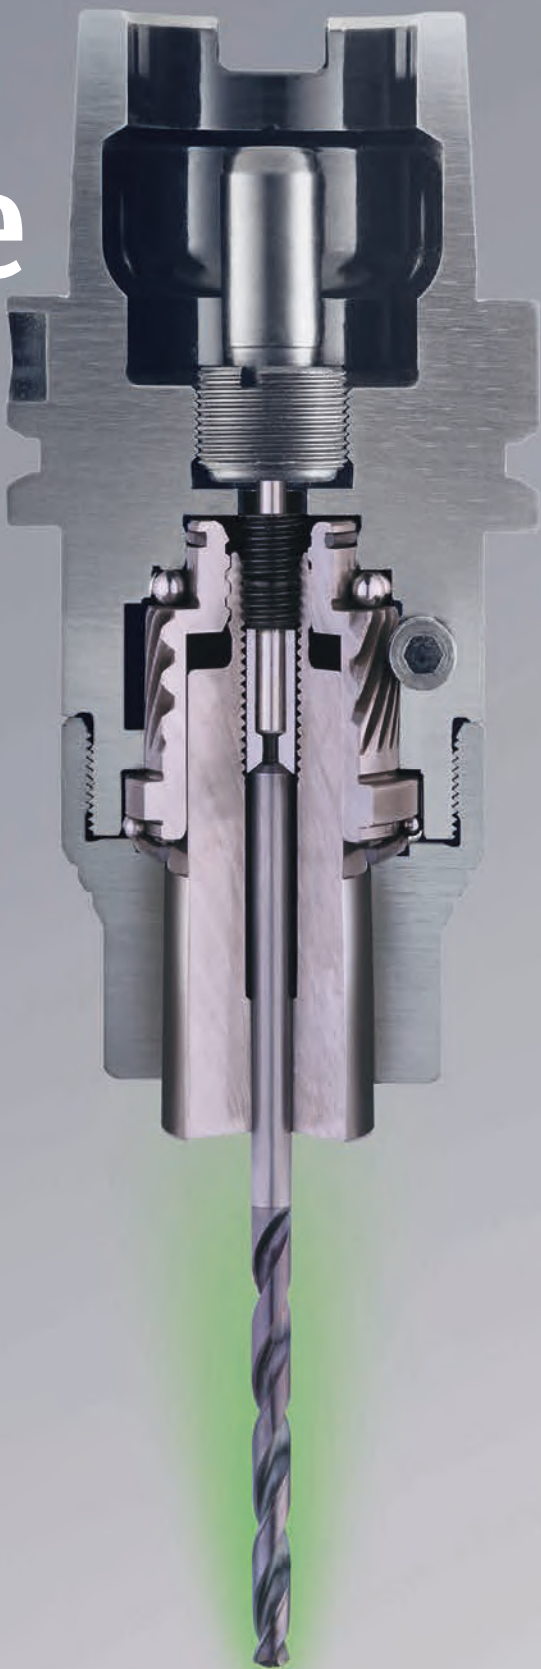

Albrecht MQL, minimum quantity lubrication

DIN 69893 HSK 50 Form A (300 014Z 650 0 and 300 120Z 650 0)

Ø	MQL Length screw Part.No.	Coolant tube 1-channel Part.No.	Coolant tube 2-channel Part.No.
4 - 6	132 0004 000 3	139 0008 650 2	139 0004 650 2
8	132 0008 000 3	139 0008 650 2	139 0004 650 2
10	132 0010 000 3	139 0008 650 2	139 0004 650 2
12	132 0012 000 3	139 0008 650 2	139 0004 650 2
14	132 0014 000 3	139 0008 650 2	139 0004 650 2
16	132 0016 000 3	139 0008 650 2	139 0004 650 2
18	132 0018 000 3	139 0008 650 2	139 0004 650 2



DIN 69893 HSK 63 Form A (300 014Z 663 0 and 300 120Z 663 0)

Ø	MQL Length screw Part.No.	Coolant tube 1-channel Part.No.	Coolant tube 2-channel Part.No.
4 - 6	132 0004 000 3	139 0008 663 2	139 0004 663 2
8	132 0008 000 3	139 0008 663 2	139 0004 663 2
10	132 0010 000 3	139 0008 663 2	139 0004 663 2
12	132 0012 000 3	139 0008 663 2	139 0004 663 2
14	132 0014 000 3	139 0008 663 2	139 0004 663 2
16	132 0016 000 3	139 0008 663 2	139 0004 663 2
18	132 0018 000 3	139 0008 663 2	139 0004 663 2



DIN 69893 HSK 80 Form A (300 020Z 680 0)

Ø	MQL Length screw Part.No.	Coolant tube 1-channel Part.No.	Coolant tube 2-channel Part.No.
4 - 6	132 0004 000 3	139 0008 680 2	139 0004 680 0
8	132 0008 000 3	139 0008 680 2	139 0004 680 0
10	132 0010 000 3	139 0008 680 2	139 0004 680 0
12	132 0012 000 3	139 0008 680 2	139 0004 680 0
14	132 0014 000 3	139 0008 680 2	139 0004 680 0
16	132 0016 000 3	139 0008 680 2	139 0004 680 0
18	132 0018 000 3	139 0008 680 2	139 0004 680 0



DIN 69893 HSK 100 Form A (300 020Z 610 0)

Ø	MQL Length screw Part.No.	Coolant tube 1-channel Part.No.	Coolant tube 2-channel Part.No.
4 - 6	132 0004 000 3	139 0008 610 2	139 0004 610 0
8	132 0008 000 3	139 0008 610 2	139 0004 610 0
10	132 0010 000 3	139 0008 610 2	139 0004 610 0
12	132 0012 000 3	139 0008 610 2	139 0004 610 0
14	132 0014 000 3	139 0008 610 2	139 0004 610 0
16	132 0016 000 3	139 0008 610 2	139 0004 610 0
18	132 0018 000 3	139 0008 610 2	139 0004 610 0



Accessories



Standard Key	Part.No.
with marking approx. 10 Nm	139 0000 905 0



Torque Key	Part.No.
corr. ISO 6789 at 10 Nm	139 0010 900 0
Spare bit 1/4"	139 0000 901 4



for Screwdriver	Part.No.
torque limiter at 10 Nm	139 0010 901 0
Spare bit 3/8"	139 0010 901 4



Taper Wiper	Part.No.
for APC 14	139 0000 GR1 0
for APC 20	139 0000 GR2 0
for APC 25	139 0000 GR4 0



Spare parts	Part.No.
Worm set APC 14/20/25 Ø9 short	139 0000 004 0
Worm set APC 14/20/25 Ø9 long	139 0000 005 0



Spare-Pins for Pin-Lock		
DxL	für	Part.No.
Ø2x12 (3 pieces)	APC20 Ø18	139 3020 212 0
Ø3x8 (3 pieces)	APC20 Ø20	139 3020 308 0
Ø3x12 (3 pieces)	APC20 Ø16	139 3020 312 0
Ø3x14 (3 pieces)	APC20 Ø6-14	139 3020 314 0
Ø4x12 (3 pieces)	APC25 Ø32	139 3025 412 0
Ø4x20 (3 pieces)	APC25 Ø22-25	139 3025 420 0
Ø4x26 (3 pieces)	APC25 Ø16-20	139 3025 426 0



Storage	Dimensions	Part.No.
for 24 Collets, APC 14	345x250x30	V01 FP14 024 0
for 21 Collets, APC 20	345x250x30	V01 FP20 021 0
for 10 Collets, APC 25	345x250x50	V01 FP25 010 0



Balancing Screws

Balancing Screws- Set, incl. case, key, difference-table and 180 pieces of fine-balancing-screws

Universal use, fits in all brands. 9 different screws in fine graduation. 20 screws each size, including Torx key. Different colours for visual identification. Precise balancing together with the clamped tool. Easy handling with Torx. Supplied with Torx ISR15 screwdriver. No need for screw locking. The balancing machine gives position and weight. Multiple use.

Typ	Part.No.
M6x4,0-8,0	139 4006 000 0



Balancing Screws			
Typ	Part.No.	Amount	Colour
M6x4,0	139 4006 040 0	20	black
M6x4,5	139 4006 045 0	20	silver
M6x5,0	139 4006 050 0	20	red
M6x5,2	139 4006 052 0	20	yellow
M6x6,0	139 4006 060 0	20	black
M6x6,5	139 4006 065 0	20	silver
M6x7,0	139 4006 070 0	20	red
M6x7,2	139 4006 072 0	20	yellow
M6x8,0	139 4006 080 0	20	black

Accessories HSK

Coolant tubes DIN 69893 (HSK)	Part. No
Coolant tube HSK-A50	139 0002 650 0
Coolant tube HSK-A63	139 0002 663 0
Coolant tube HSK-A80	139 0002 680 0
Coolant tube HSK-A100	139 0002 610 0



Key with T-handle	Part. No
for Coolant tube HSK-A50	139 0020 650 0
for Coolant tube HSK-A63	139 0020 663 0
für for Coolant tube HSK-A80	139 0020 680 0
for Coolant tuber HSK-A100	139 0020 610 0



Mountingsystem

flexible, vertical/horizontal, locked



Mouting System- Base Unit	Part.No.
	730 1000 000 0



Adaptor	Part.No.
ISO 7388-1 + ISO7388-2	
SK30 + BT30	730 1000 230 0
SK40 + BT40	730 1000 240 0
SK50 + BT50	730 1000 250 0
DIN 69893	
HSK50	730 1000 650 0
HSK63	730 1000 663 0
HSK80	730 1000 680 0
HSK100	730 1000 610 0
ISO 26623-1	
PSC50	730 1000 9C5 0
PSC63	730 1000 9C6 0
PSC80	730 1000 9C8 0



Handling APC and Ultra

The Albrecht chuck is high precision toolholder with clamping gear. Its unique design provides a very high clamping force, run-out accuracy as well as a positive dampening feature for machining (milling, drilling, reaming, tapping, heavy-duty cutting, finish milling, HSC operations). The Chuck uses a special collet to clamp the cutting tool and is operated by a hex key on the periphery.



Cleaning, insert the Collet

Before each use, clean the inner cone chuck free cloth and chuck cone cleaner. Attention, do not work with compressed air during the cleaning process, as otherwise dissolved dirt particles can get into parts of the gearbox.



For maximum clamping forces, the bore, the tool shank, the cone of the clamping sleeve and the inner cone chuck must be degreased each time the tool is changed.



Insert the cleaned and undamaged tool shank into the clamping sleeve, observing the minimum clamping depth, see page 73. Screw the clamping sleeve with tool into the chuck manually until the clamping sleeve touches the cone.



Clamping

The chucking procedure starts by engaging the screw on the side of the chuck and rotating the hex key clockwise. Max. clamping torque see product-marking. Use only Albrecht keys, see page 41. Put in the hex key as far as possible. Hex tool surface is to be inspected about damages!



Match the two arrowheads when clamping.



Releasing

Open the Spannfutter by turning the hex key counter-clockwise. Note: when opening the chuck you must overcome two resistance points. First, you will overcome the friction torque and then the collet is loosened. Then open until the tool can be taken out, respectively the collet can be unscrewed manually.



Length adjustment

A length stop screw is located in the collet and can be adjusted with a hex key (size 5/32 hex). For operation from the back through the chuck with taper shank a bolt with a through hole is necessary (form AD). The range of the length adjustment: 11mm.

Technical Data Typ	Clamping-Diameter, Ø-Tolerance h6, Ø mm / Ø inch		Min. Clampingdepth	Max. Clampingdepth
14/20	2 - 5	1/8" - 3/16"	17	66
	6	1/4"	22	40
	7 - 10	5/16" - 3/8"	30	50
	11 - 15	7/16" - 9/16"	38	50
20	16 - 20	5/8" - 3/4"	38	48,5
25	12,7	1/2"	47	54,5
	16 - 32	5/8" - 11/4"	47	60

Balancing grade

Each Albrecht Chuck is fine-balanced without collet and tool according to the laser marking. Higher balancing quality and rpm on request. The use of shanks with recesses influences the balancing grade and run-out accuracy of the whole system.

Maintenance

The Chuck is maintenance free over his lifetime. Clean chuck (especially the inner cone) and collet including thread after usage with a solvent base cleaner. According to contamination the cleaning cycles have to be adjusted. After cleaning, apply a thin coat of anticorrosive.

Repairs

In order to guarantee the precision of the tool, any chuck in need of repair has to be sent to the manufacturer or to an authorized national agent only. We recommend checking the chuck and the collet for run-out deviations and gripping torque periodic, especially after a tool break or crash.

Assessment of tool holder performance in roughing with end mills

Abstract

Tool holders are an important power train component of milling with shaft tools having a high impact on dynamic process behaviour and process results. This leads to a significant demand among industrial companies for scientifically proven methods to analyse tool holders which are easy to use as well. Different approaches were applied in order to meet these demands. The dynamic vibrational behaviour of different clamping mechanisms is investigated using tool holders of similar dimensions. First, the resonance frequencies of the tool holders are identified from dynamic compliance measurements in the machine tool. Subsequently, the dynamic process behaviour is investigated by peripheral milling tests in which vibrations of tool and tool holder are detected by acceleration sensors and microphones. Analysis of the sensor data and optical analysis of the manufactured surface reveal a significant influence of the particular clamping mechanism, superimposed by certain geometrical variations of the investigated tool holders. Chatter frequencies occurring during milling tests seem independent of the clamping mechanism respectively the particular tool holder and are caused by the tool or machine-tool components. They correspond roughly with the natural frequencies identified before. Chatter intensity and spindle speeds, at which chatter occurs, are influenced by the tool holders. The occurrence of chatter vibrations correlates with a significant drop in the surface quality of the workpiece. High resonance frequencies of the tool holder excited by chatter and low-frequency waviness observed on the machined surface are related. The well-known phenomenon can be explained under rough milling conditions by a 2D-model-based superposition of subsequent cutting edge engagements. This in turn may enable dynamic analysis and optimisation of rough milling operations by easy to use shop floor equipment in future.


Keywords Tool holders · Dynamic behaviour · Surface formation · Frequency analysis · Shaft tools · Steel milling

Investigated tool holder systems:



Fig. 1 Examples of the investigated tool holder systems

Table 1 Main properties of the investigated tool holders

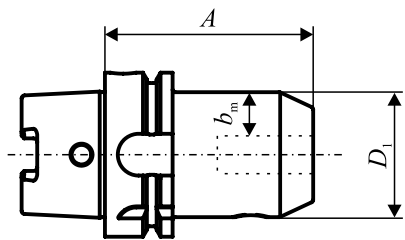

Test setup:

Machine: MC12 by Gebr. Heller
Tool: torus cutter, D=12, number of teeth=4
Material: Steel, 42CrMo4 (1.7225)

Cutting Parameter:
 $n = 3979 \text{ rev/min}$
 $f_z = 0,04 \text{ mm/rev/tooth}$
 $a_e = 7 \text{ mm}$
 $a_p = 18 \text{ mm}$

Tool holder	A [mm]	mass m [g]	D_1 [mm]	b_m [mm]	Design
APC	92	1457	40	18	Modular
ER	100	1274	42	12.5	Modular
HE	90	1123	32	9	Monolithic ^a
TS	90	918	24	8	Monolithic ^a
Weldon	80	1120	42	15	Monolithic ^b

^aFull-periphery clamping

^bPoint-line clamping

Correlation between in-process vibrations and surface quality:

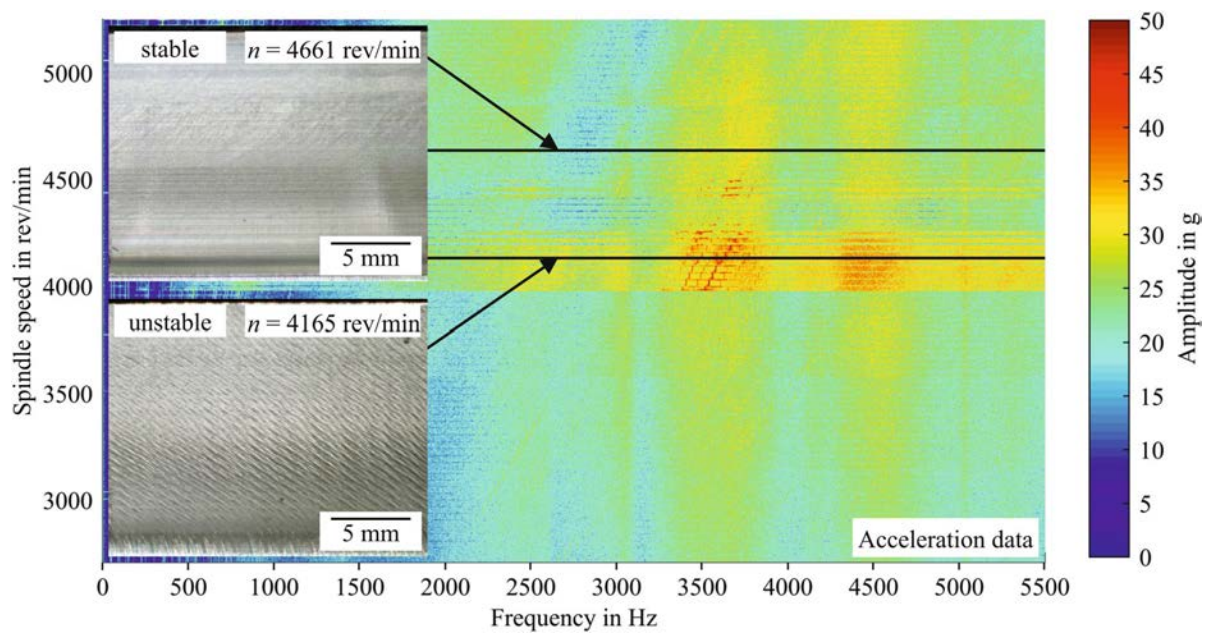


Fig. 7 Correlation between in-process vibrations and surface quality. (Tool holder: ER-collet, $n = 2708 - 5250 \text{ rev/min}$, $f_z = 0.04 \text{ mm/rev/tooth}$, $a_e = 7 \text{ mm}$, $a_p = 18 \text{ mm}$)

APC with best results in comparison to other tool-holders:

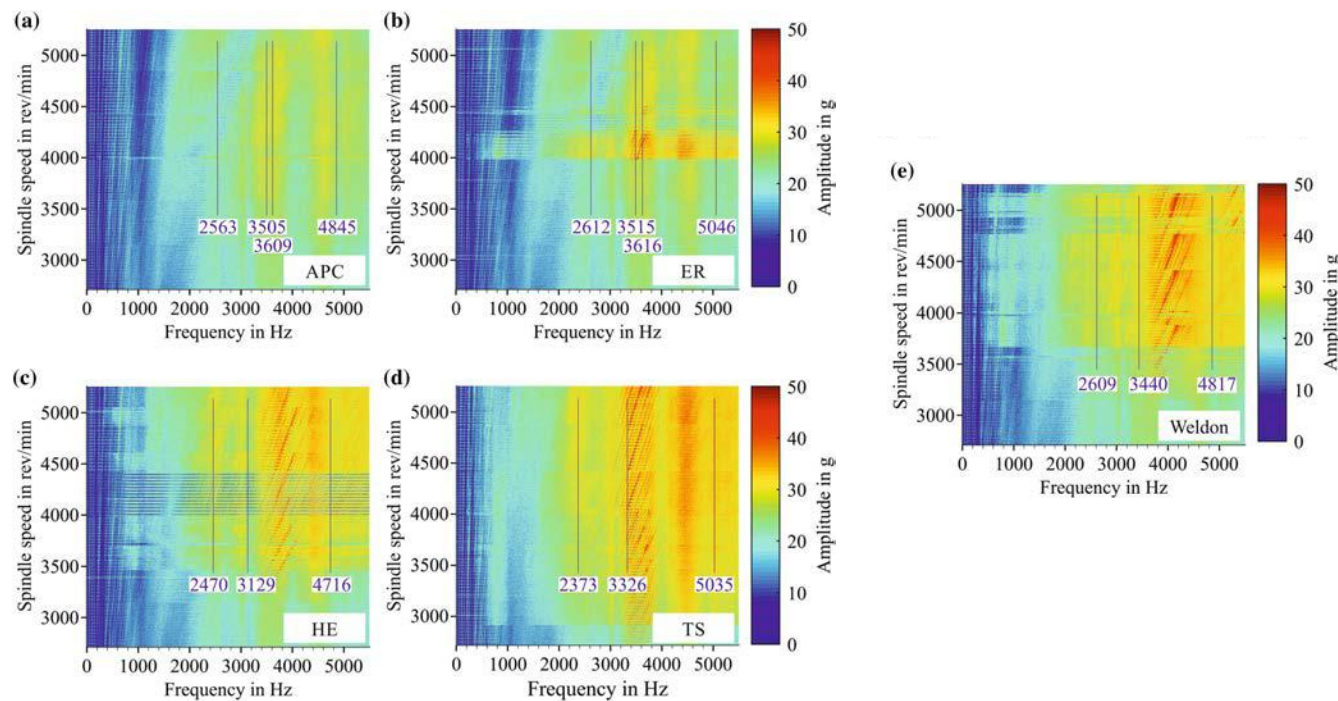


Fig. 6 Visualisation of in-process vibrations using Campbell diagrams based on acceleration sensor data. ($n = 2708 - 5250 \text{ rev/min}$, $f_z = 0.04 \text{ mm/rev/tooth}$, $a_e = 7 \text{ mm}$, $a_p = 18 \text{ mm}$)

100% Medical



ALBRECHT
Precision Chucks

ALBRECHT. 100% Medical. 100% Surgical.

Back then, in 1930 we did invent the keyless drill chuck and -
in the decades to come - improved it more and more.

In 1990 we developed the first stainless steel chuck for the medical
and surgical applications. And today we have set the benchmark
for power & surgical instruments all others compete with.

Welcome 100%.

Damals, 1930, haben wir das schlüssellose Bohrfutter erfunden
und – in den Jahrzehnten danach – verbesserten wir uns immer weiter.
1990 entwickelten wir erste Edelstahl-Bohrfutter für die Medizintechnik.
Und heute sind wir für die Motorsysteme
in der Chirurgie der Maßstab, an dem sich
alle messen. Herzlich willkommen 100%.



Inner and outer values Innere und äußere Werte

All components are:
Fixed permanently.
Specifically hardened.
Specifically ground.
All parts perfectly tuned.

Alle Bauteile fest verbunden.
Gezielt gehärtet. Gezielt geschliffen.
Alle Funktionsflächen perfekt
aufeinander abgestimmt.

Finished electropolished
functional surfaces offer
protection against corrosion
and contamination.

Fein bearbeitete, elektro-
polierte Funktionsflächen
bieten Korrosions- und
Kontaminationsschutz.

100% deburred surfaces.
Rounded edges.
Damage to hygienic gloves has
been minimized. Traceability
due to manufacturer's label.

100% geglättete Oberflächen.
Kanten rund und weich.
Beschädigung von Hygiene-
handschuhen nicht zu erwarten.
Rückverfolgbarkeit durch
Herstellerkennzeichnung.

Max. clamping with clockwise
operation. It can be easily
opened without key. Body and
spindle has been optimized for
superior performance. He who
masters this best can offer the
best drill chuck.

Bei Rechtslauf maximal fest
gespannt. Leicht und schlüssellos
zu öffnen. Körper und Spindel
optimal aufeinander abgestimmt.
Wer dies am besten beherrscht,
bietet das beste Bohrfutter.

Hardness of jaws min. 55 HRC,
because only with such hard
high-quality material tools can
be reliably clamped.

Spannbacken-Härte min. 55 HRC.
Denn nur mit solch hartem,
hochwertigem Material lassen sich
Werkzeuge zuverlässig spannen.

Pure and clean.
European patent Nr. 1972287.
The residue in this drill chuck
will be flushed out through
special channels.

Rein und sauber.
Europäisches Patent Nr. 1972287.
Die Rückstände in diesem
Bohrfutter werden durch Kanäle
sehr sauber ausgespült.



So hands can reach what eyes see. Each medical/surgical
Albrecht drill chuck has to go through 12 quality checks.

Damit Hände erreichen, was Augen sehen. Jedes medizinische
Bohrfutter von ALBRECHT absolviert 12 Qualitätskontrollen.

1. Check of raw material
2. Check of tensile strength
3. Check of material certificate
4. Check of part for approval
5. Check of tolerances by operator
6. Check of all hardened parts
7. Check of surface finishing
8. Check of polishing + passivation
9. Check of tightening torque
10. Check of clamping range
11. Check of gripping torque
12. Check of runout accuracy



- Kontrolle der Materialgüte
Kontrolle der Zugfestigkeit
Kontrolle der Werkzeugeigenschaften
Kontrolle des Abnahmeteils
Kontrolle der Maße durch Werker
Kontrolle aller gehärteten Teile
Kontrolle der Oberflächen-Feinbearbeitung
Kontrolle der Politur und Passivierung
Kontrolle des Anzugsmoments
Kontrolle des Spannungsbereichs
Kontrolle des Haltemoments
Kontrolle des Rundlaufverhaltens

Drill chuck specially knurled. Stainless steel. Self-tightening. STD ISO 239. UNF. Built for the most precise bores. The ergonomic self-tightening system allows for a very simple and quick operation. A clamping key is not necessary. Subtly knurled surfaces, electropolished. Round edges. All parts hardened for a max. chuck life. Ducts and all contact surfaces are ground. Checking for functioning and precision is done in accordance with standard ISO 10888. Through hole. Permanent markings, stamped. For clock-wise rotation.

Bohrfutter speziell gerändelt. Edelstahl. Selbstspannend. DIN ISO 239. UNF. Gebaut für die präzisesten Bohrungen. Die ergonomische Selbstspannung ermöglicht eine sehr einfache und schnelle Bedienung. Ein Spannschlüssel ist nicht erforderlich. Feinst gerändelte Oberflächen, elektropoliert. Kanten abgerundet. Alle Bauteile für maximale Lebensdauer gehärtet. Führungen sowie alle Plananlagen geschliffen. Funktions- und Genauigkeitsprüfung über den gesamten Spannbereich richten sich nach ISO 10888. Durchgangsbohrung. Dauerhafte Beschriftungen, geprägt. Für Rechtslauf.

Ref. No.	Range	Mount	D	L1	L2	Through hole	kg
Artikel Nr.	Spannbereich	Aufnahme	D	L1	L2	Durchbohrt	kg
100 N015 B06 O	0,2 - 1,5	J0	19	35	37	1,8	0,05
100 N030 J01 O	0,2 - 3,0	J1	24	46,5	50	2,5	0,1
100 N030 G02 O	0,2 - 3,0	3/8"-24	24	46,5	50	2,5	0,1
100 N050 J01 O	0,6 - 7,4	J1	30	56	62,5	5,3	0,2
100 N050 G02 O	0,6 - 7,4	3/8"-24	30	56	62,5	5,3	0,2




Drill chuck Ergon-Grip-Design™. Stainless steel. self-tightening. STD ISO 239. UNF. This drill chuck does not have any knurled surfaces as the Ergon-Grip design has only smooth surfaces. Thus, handling with hygienic gloves is made easier. The smooth Ergon-grip surfaces also reduce the risk for contamination and corrosion. Built for most precise bores without need for a clamping key. Surfaces are electropolished. Edges are round. All parts hardened for a max. chuck life. Ducts and all contact surfaces are ground. Checking for functioning and precision for the complete range is in accordance with standard ISO 10888. Through hole. Permanent markings, stamped. For clock-wise rotation. Also available as flushable version with flushing pin – European patent Nr. 1972287.

Bohrfutter Ergon-Grip-Design™. Selbstspannend. Edelstahl. DIN ISO 239. UNF.

Dieses Bohrfutter hat keine gerändelten Flächen, denn das Ergon-Grip-Design hat alle Flächen geglättet und erleichtert so das Handling mit Hygienehandschuhen. Dazu senken die glatten Ergon-Grip-Oberflächen Kontaminationsrisiko und Korrosionsgefahr. Für feinste Bohrungen, ohne Spannschlüssel. Oberflächen elektropoliert. Kanten rund. Beste gehärtete Teile sichern eine hohe Lebensdauer. Führungen wie alle Plananlagen geschliffen. Funktions- und Genauigkeitsprüfung über den gesamten Spannbereich richten sich nach ISO 10888. Durchgangsbohrung. Dauerhafte Beschriftungen, geprägt. Für Rechtslauf. Auch erhältlich in einer spülbaren Ausführung mit Spüldorn – Europäisches Patent Nr. 1972287.

Ref. No.	Range	Mount	D	L1	L2	Through hole	kg
Artikel Nr.	Spannbereich	Aufnahme	D	L1	L2	Durchbohrt	kg
100 N030 G02 1	0,3 - 3,3	3/8"-24	25,5	46,5	50	2,5	0,12
100 N030 J01 1	0,3 - 3,3	J1	25,5	46,5	50	2,5	0,12
100 N050 G02 1	0,6 - 7,4	3/8"-24	31,5	56	62,5	5,3	0,24
100 N050 J01 1	0,6 - 7,4	J1	31,5	56	62,5	5,3	0,24



Drill chuck with OP-reversing lock. Self-tightening. Stainless steel. UNF.

The reversing lock of this chuck reliably prevents an accidental opening during surgery. By pulling the clamping ring – visible in the upper area – the reversing lock is opened again. The round smooth ergonomic form allows for the closing of the chuck with highest gripping forces – even when wearing hygienic gloves. In addition, the completely smooth surfaces reduce the risk for contamination and corrosion. 100 % checking for functioning and precision is in accordance with standard ISO 10888. Through hole. Permanent markings, stamped. For clock-wise and counter-clockwise rotation.

Bohrfutter mit OP-Spannsicherung. Selbstspannend. Edelstahl. UNF.

Die Spannsicherung dieses Bohrfeeders verhindert sicher das ungewollte Öffnen während der OP. Durch Ziehen des Spannringes – im oberen Bereich sichtbar – wird die Spannsicherung wieder entriegelt. Die runde, glatte, electropolierte und ergonomische Form ermöglicht auch mit Hygienehandschuhen das Schließen mit höchster Spannkraft. Dazu reduzieren die absolut glatten Oberflächen Kontamination und Korrosion. 100% Funktions- und Genauigkeitsprüfung über den gesamten Spannbereich angelehnt an ISO 10888. Durchgangsbohrung. Dauerhafte Beschriftungen, geprägt. Rechts- und Linkslauf.

Ref. No.	Range	Mount	D	L1	L2	Through hole	kg
Artikel Nr.	Spannbereich	Aufnahme	D	L1	L2	Durchbohrt	kg
100 N050 G02 L	0,6 - 7,4	3/8"-24	31,5	68	74,5	5,3	0,26




T-grip. For manual drilling. For Drill chuck with OP-reversing lock. Stainless steel.

For all who require a slowly rotating, more cutting drilling operation which does not get too warm. Also ideal for screwing in screws and nails and for the manual placing of wires.

T-Griff. Für Handbohrungen. Für das Bohrfutter mit OP-Spannsicherung. Edelstahl.

Für alle, die zum Arbeiten ein langsam rotierendes, mehr schneidendes und nicht zu warm werdendes Bohren benötigen. Ebenso ideal zum Eindrehen von Schrauben und Nägeln und zum manuellen Setzen von Drähten.


Ref. No.	Mount	Through hole	kg
Artikel Nr.	Aufnahme	Durchbohrt	kg
1S8 N050 001 O	3/8"-24	5,3	0,1



Key-type drill chuck. Stainless steel. UNF.
We know of no other key-type drill chuck which offers such a large range while being built so compact.
Teeth are fully compatible with Jacobs and all edges are softly rounded.
For clockwise and anti-clockwise operation.

Zahnkranz-Bohrfutter. Edelstahl. UNF.
Wir kennen kein anderes Zahnkranzbohrfutter, das bei solch kompakter Bauweise, einen so großen Spannbereich bietet. Selbstverständlich ist die Verzahnung jacobskompatibel und sämtliche Kanten sind weich abgerundet.
Durchgangsbohrung. Für Rechts- und Linkslauf.

Ref. No.	Range	Mount	D	L1	L2	Through hole	kg
Artikel Nr.	Spannbereich	Aufnahme	D	L1	L2	Durchbohrt	kg
400 N040 G01 O	0,3 - 4,0	5/16" -24	22	30,4	37,8	5,5	0,04
410 N040 000 O	Key/Schlüssel						0,02
400 N074 G02 O	0,6 - 7,4	3/8" -24	28,4	40,5	52	7,5	0,10
410 N074 000 O	Key/Schlüssel						0,02



100%

ALBRECHT PRÄZISION
GmbH & Co. KG
Antoniusstraße 25
D-73249 Wernau
T +49 7153 / 3006 – 0
F +49 7153 / 3006 – 11
info@albrecht-germany.com
www.albrecht-germany.com

For the US:
info@albrechtchucks.com
www.albrechtchucks.com



ALBRECHT
Precision Chucks


Micro

Precision Chucks

ALBRECHT
GERMANY

ALBRECHT


Precision Chucks

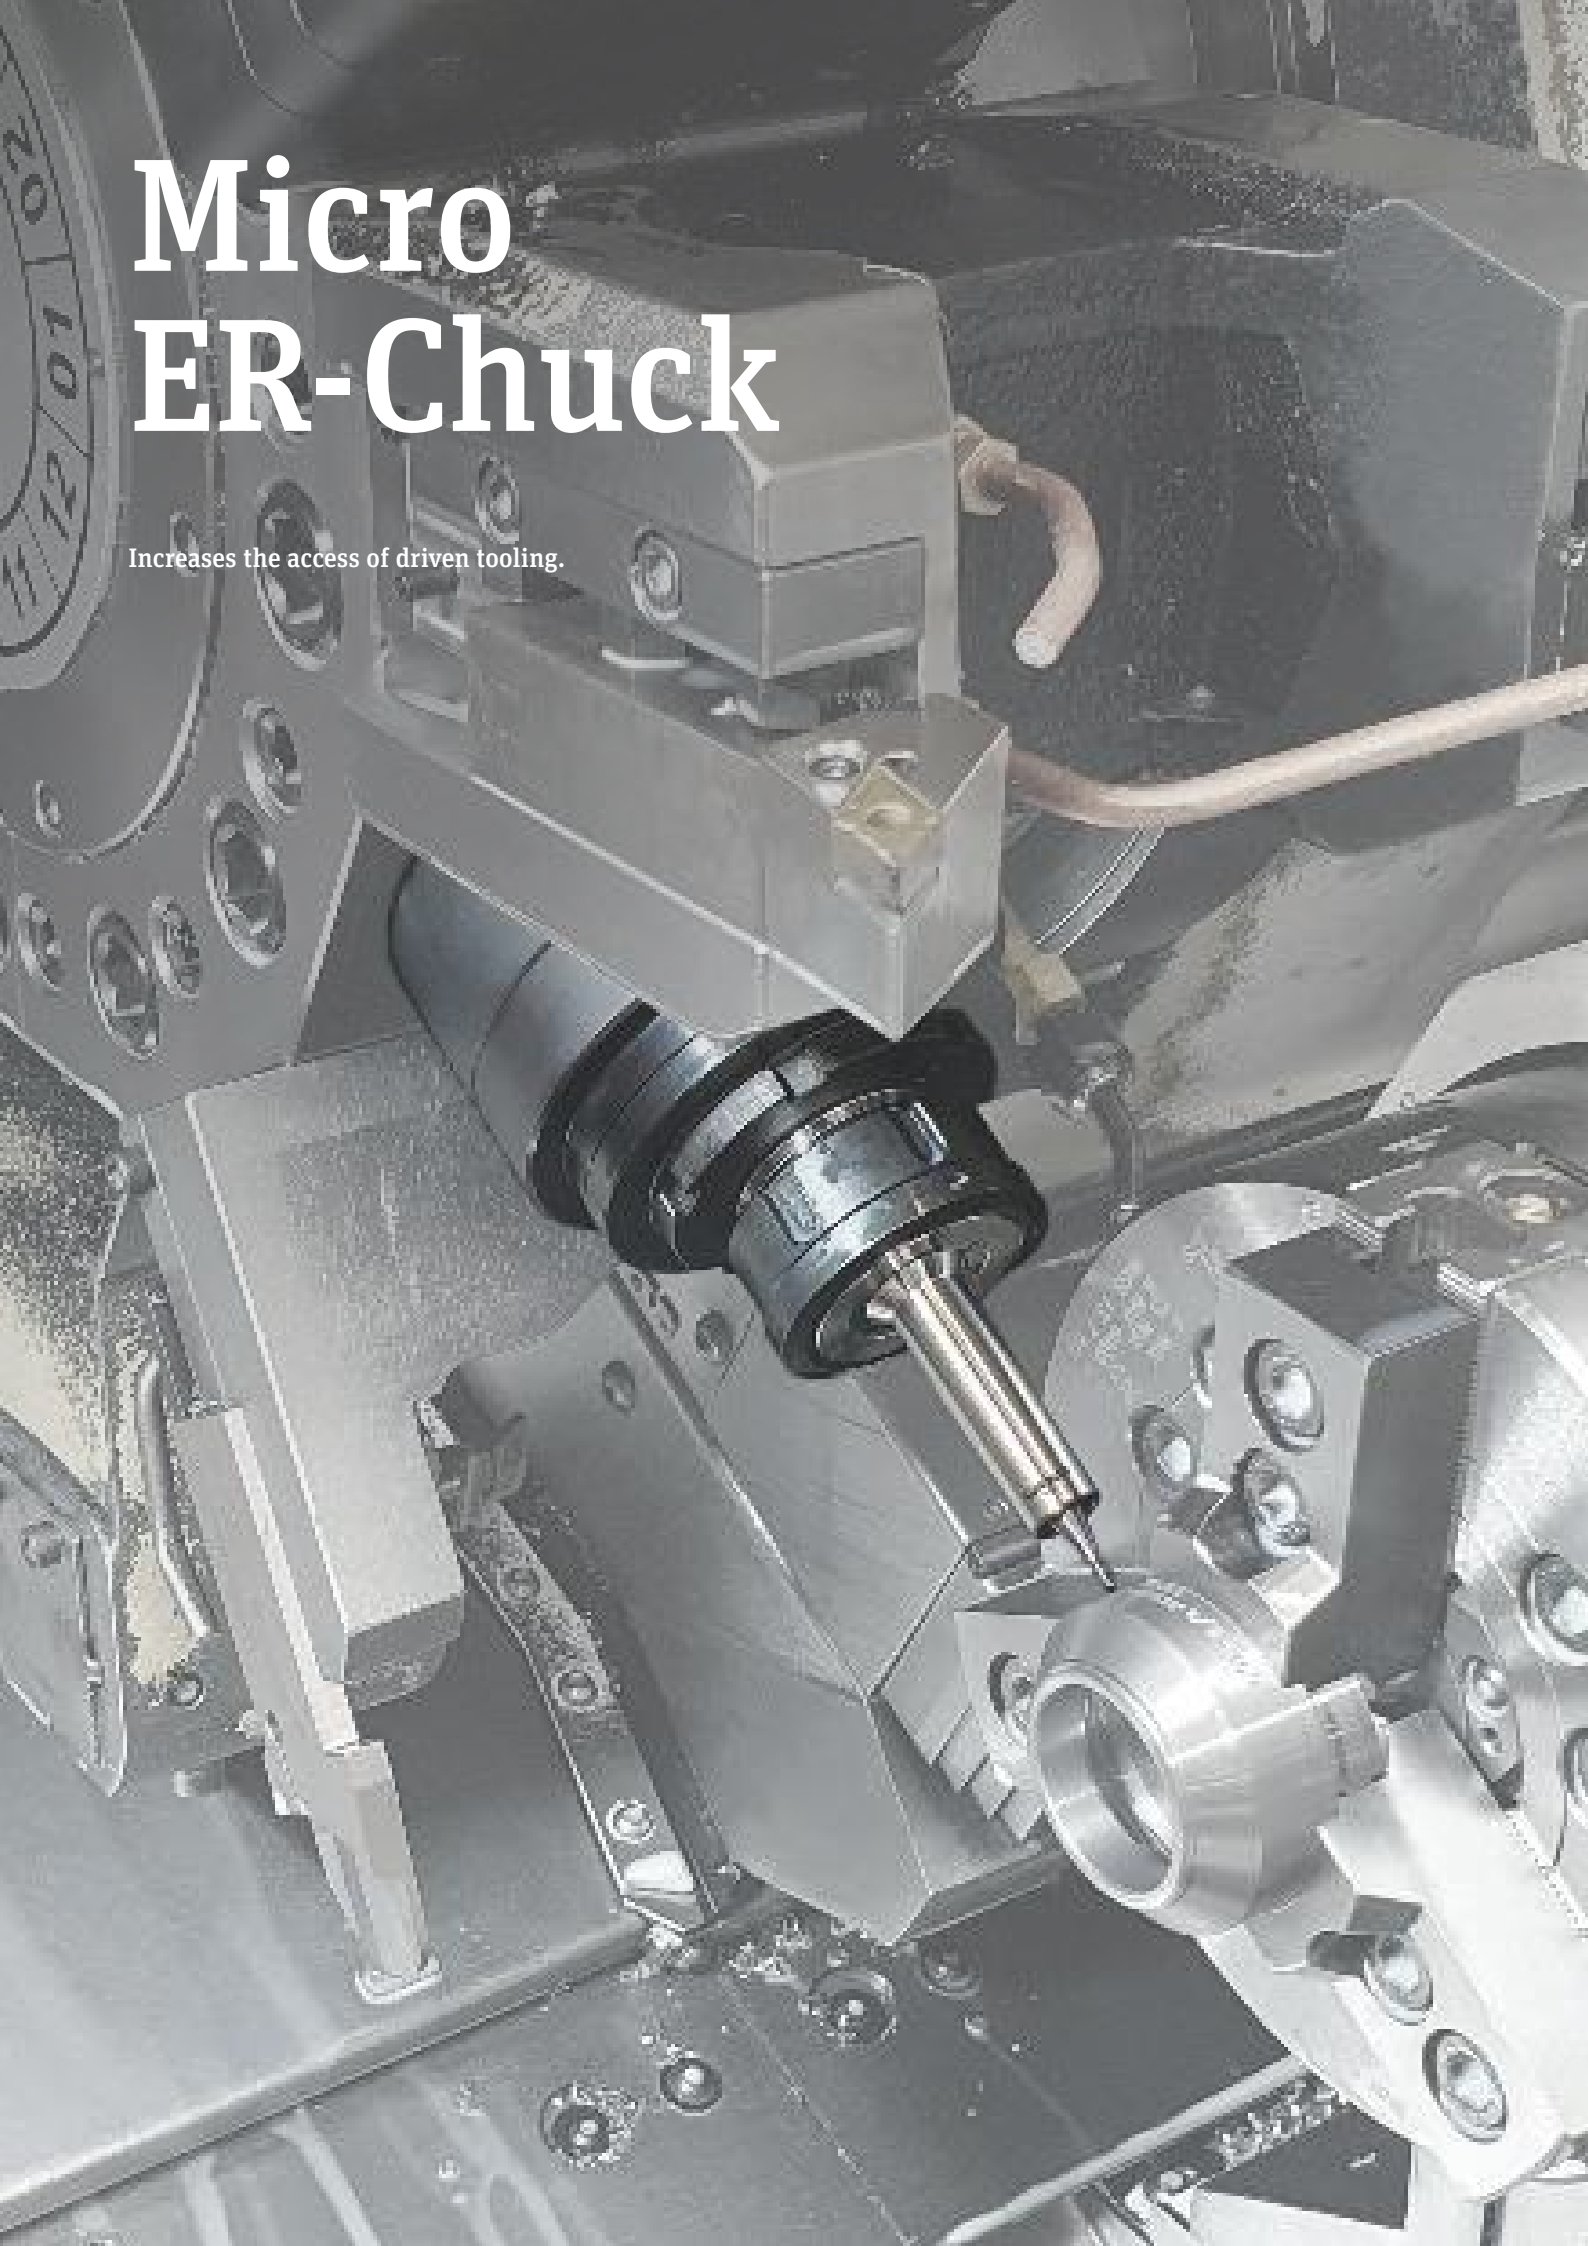

Micro ER-Chuck

Increases the access of driven tooling.


Micro ER-Precision-Chuck, for Collet-Chucks according to DIN ISO 15488
Easy exchange of tools by using a hex-key (included in delivery). Maintenance-free. Sealed against coolant and particles. Slow collet taper angle. Collet with special coating (see page 61). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

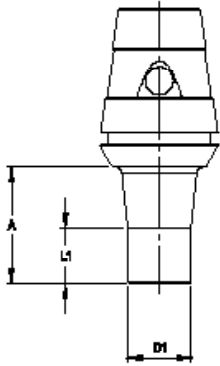

High chip removal and process-reliability with driven tooling

High-speed balanced

Coolant directed to cutting tool

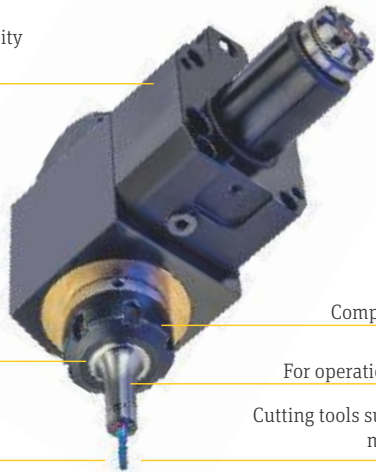

Compatible with common ER-nuts
For operation areas with difficult access.
Cutting tools supported over greater length, more rigidity and dampening.

ER 161 – 6 mm					
A	Part.No.	L1	D1	Balanced	kg
35	310 1006 316 1 *	35	13,5	by design	0,1

* Special ER-nut included in delivery



ER 201 – 6 mm					
A	Part.No.	L1	D1	Balanced	kg
28	310 1006 320 1	28	13,5	by design	0,1
35	310 2006 320 1	35	13,5	by design	0,1



ER 251 – 6 mm					
A	Part.No.	L1	D1	Balanced	kg
25	310 1006 325 1	12	13,5	by design	0,1
40	310 2006 325 1	15	13,5	by design	0,1
50	310 3006 325 1	20	13,5	by design	0,1



ER 321 – 6 mm					
A	Part.No.	L1	D1	Balanced	kg
25	310 1006 332 1	12	13,5	by design	0,2
40	310 2006 332 1	15	13,5	by design	0,2
50	310 3006 332 1	20	13,5	by design	0,2





Micro

**The Albrecht Micro.
Made for the
smallest and finest
surfaces. Range
1 - 6 Millimeter.**


Ideal for microtools.
Clamping range 1 - 6 mm.
Peripheral or internal cooling.
Significantly better dampening
in comparison to Shrink Chucks.
Slim shape D1=13,5 mm.
Perfect runout $\leq 3 \mu\text{m}$ 2,5xD.
Up to 40.000 1/min $\leq 1 \text{ gmm}$.

For the finest surfaces even for
difficulty accessible areas.
Special coated collets.
Maintenance-free.
The Albrecht Micro.
None is more fine.

HSK

Micro Precision Chuck, ISO 12164 (DIN 69893)

Easy exchange of tools by setting of hex-key (included in delivery). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 61). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA. Coolant tubes see page 79.

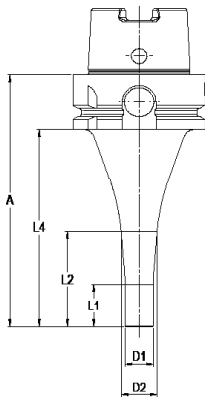


HSK 40-A										1 – 6 mm
A	Part.No.	Form	L1	L2	L4	D1	D2	Balanced	kg	
75	310 1006 640 1	A	20	35	55	13,5	16	<1gmm	0,3	
HSK 50-A										
85	310 1006 650 1	A	20	34	59	13,5	16	<1gmm	0,5	
120	310 2006 650 1	A	20	45	94	13,5	18	<1gmm	0,7	
HSK 63-A										
90	310 1006 663 1	A	20	30	64	13,5	15	20.000 G=2,5	0,8	
120	310 2006 663 1	A	20	45	94	13,5	17	20.000 G=2,5	1,0	
160	310 3006 663 1	A	20	70	134	13,5	22	20.000 G=2,5	1,2	
HSK 40-E										
75	310 10E6 640 1	E	20	35	55	13,5	16	<1gmm	0,3	
HSK 50-E										
85	310 10E6 650 1	E	20	40	59	13,5	17	<1gmm	0,5	
120	310 20E6 650 1	E	20	45	94	13,5	18	<1gmm	0,7	



SK

Micro Precision Chuck, ISO 7388-1 (DIN 69871)

Easy exchange of tools by setting of hex-key (included in delivery). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 61). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

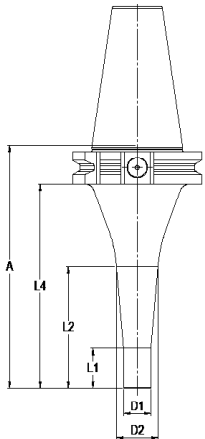


SK 30										1 – 6 mm
A	Part.No.	Form	L1	L2	L4	D1	D2	Balanced	kg	
75	310 2006 230 1	A/AD	20	32	56	13,5	16	<1gmm	0,5	
SK 40										
90	310 1006 240 1	A/AD	20	38	71	13,5	17	20.000 G=2,5	1,0	
120	310 2006 240 1	A/AD	20	60	101	13,5	21	20.000 G=2,5	1,2	
160	310 3006 240 1	A/AD	20	75	141	13,5	23	20.000 G=2,5	1,2	



MAS-BT

Micro Precision Chuck, ISO 7388-2 (JIS B 6339)

Easy exchange of tools by setting of hex-key (included in delivery). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 61). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

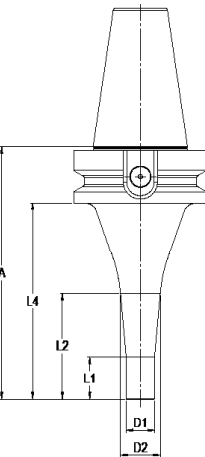


BT 30										1 – 6 mm
A	Part.No.	Form	L1	L2	L4	D1	D2	Balanced	kg	
75	310 2006 430 1	A/AD	20	30	53	13,5	15	<1gmm	0,5	
BT 40										
90	310 1006 440 1	A/AD	20	30	63	13,5	15	20.000 G=2,5	1,2	
120	310 2006 440 1	A/AD	20	50	93	13,5	19	20.000 G=2,5	1,3	
160	310 3006 440 1	A/AD	20	70	133	13,5	22	20.000 G=2,5	1,3	



Polygon

Micro Precision Chuck, DIN ISO 26623-1

Easy exchange of tools by setting of hex-key (included in delivery). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 61). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

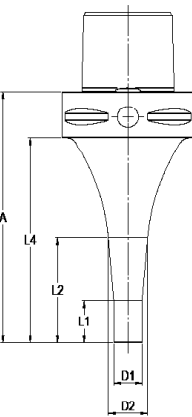

PSC 40										1 – 6 mm
A	Part.No.	Form	L1	L2	L4	D1	D2	Balanced	kg	
75	310 1006 9C4 1	A	20	35	55	13,5	16	<1gmm	0,3	
PSC 63										
90	310 1006 9C6 1	A	20	30	68	13,5	15	20.000 G=2,5	1,0	
120	310 2006 9C6 1	A	20	50	98	13,5	19	20.000 G=2,5	1,1	




Micro Chuck-Extension


For extension of Precision Chucks.
Very slim design for operation areas which are not easy to access. High gripping torque and accuracy due to slow angle taper.

Micro Precision-Chuck-Extension with Cylindrical Shank.
Easy exchange of tools by setting of hex-key (included in delivery). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 61).
Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA. Tolerance of shank h6.
System-Runout-Accuracy 8 µm at 2,5 x D.

Cylindrical shank 14 mm							1 – 6 mm
L1	Part.No.	Coolant	L2	D1	D2	AF	kg
100	310 1006 814 1	Central	29	13	14	13	0,16
150	310 2006 814 1	Central	29	13	14	13	0,10

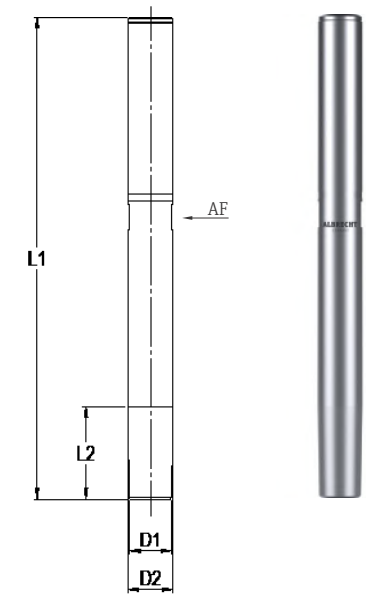

Cylindrical shank 20 mm							1 – 6 mm
L1	Part.No.	Coolant	L2	D1	D2	AF	kg
100	310 1006 820 1	Central	45	13	20	13	0,17
150	310 2006 820 1	Central	67	13	20	19	0,30

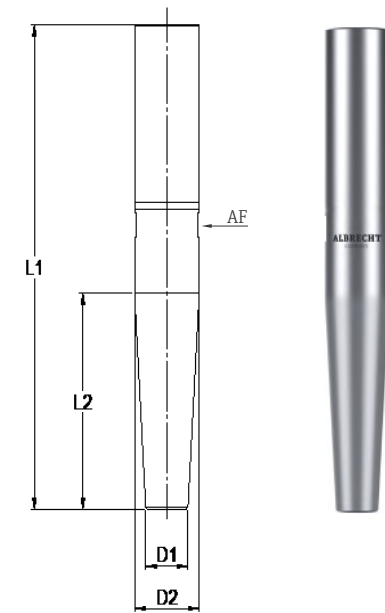

Collets and Accessories



Collets Peripheral Coolant. Additional cooling and rinsing effect. Increases the safety of processing. Special Coating. Maintenance free. Clamping of tool shanks corresponding to DIN 1835A, B and DIN 6335 HB, HA.

1 – 6 mm			
D	Part.No.	Coolant	kg
1,0	136 0601 000 0	Periphery	0,02
2,0	136 0602 000 0	Periphery	0,02
2,5	136 0602 500 0	Periphery	0,02
2,8	136 0602 800 0	Periphery	0,02
3,0	136 0603 000 0	Periphery	0,02
3,5	136 0603 500 0	Periphery	0,02
4,0	136 0604 000 0	Periphery	0,02
4,5	136 0604 500 0	Periphery	0,02
5,0	136 0605 000 0	Periphery	0,02
6,0	136 0606 000 0	Periphery	0,02

Special size and inch diameter on request

Collets Internal Coolant. 100% leak proof up to 100 bar coolant pressure. Special Coating. Maintenance free. Clamping of tool shanks corresponding to DIN 1835A, B and DIN 6335 HB, HA.

1 – 6 mm			
D	Part.No.	Coolant	kg
1,0	136 0601 000 T	Central	0,02
2,0	136 0602 000 T	Central	0,02
2,5	136 0602 500 T	Central	0,02
2,8	136 0602 800 T	Central	0,02
3,0	136 0603 000 T	Central	0,02
3,5	136 0603 500 T	Central	0,02
4,0	136 0604 000 T	Central	0,02
4,5	136 0604 500 T	Central	0,02
5,0	136 0605 000 T	Central	0,02
6,0	136 0606 000 T	Central	0,02

Special size and inch diameter on request


Torque Key	Part.No.
3,0 - 5,4 Nm	139 0005 900 0

Taper Wiper	Part.No.
for Micro	139 0000 GRO 0
Replacement papers, 25 pcs.	139 0000 GRO 2

Pull Stud	Part.No.	Thread	through-hole	Angle	Neck- Ø	kg
SK30	138 0004 230 0	M12	Ø4	15°	9	0,03
BT30	138 0004 430 0	M12	Ø4	45°	8	0,04
BT40	138 0004 440 0	M16	Ø4	45°	10	0,04

based on DIN





ALBRECHT PRÄZISION
GmbH & Co. KG

D-73249 Wernau
Antoniusstraße 25
T +49 7153 / 3006-0
F +49 7153 / 300611
info@albrecht-germany.com
www.albrecht-germany.com

ALBRECHT
Precision Chucks

Maximize your work

**Highest metal
removal rate.
Adaptive cooling
ring 10-30°.
Safety of processing
with Pin-Lock.**

ALBRECHT
Germany

Ultra metal removal rate.
Ultra-Gripping.
Ultra-Dampening.
Ultra-Safe due to Pin-Lock.
In addition peripheral cooling which
adapts perfectly to every task.

Up to 33.000 rpm.
Runout $\leq 3 \mu\text{m}$.
Cooling-Ring 10-30°.

Albrecht Ultra - The basis for
record-setting.


Albrecht Ultra Chuck

Compact Design. D=16-25 mm.
For highest Metal-Removal-
Rates Finebalancing 6xM6.
Integratet Pin-Lock.
Adjustable peripheral coolant.



HSK

Ultra Chuck, DIN 69893 (DIN ISO 12164)
Easy exchange of tools by setting of hex-key (see page 45). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 44). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA as well as HE up to D = 25 mm. Pin-lock safety, balancing holes 6xM6. Changeable cooling ring for peripheral coolant supply (see page 45).

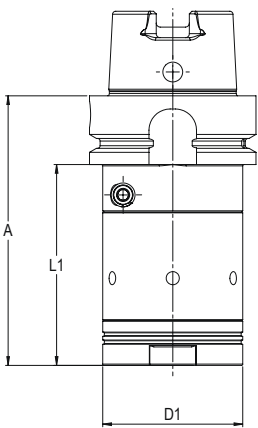

HSK63 A 16 – 20 mm						
A	Part.No.	Form	L1	D1	Balanced	kg
102	360 020A 663 0	A	76	53	20.000 G=2,5	1,5
HSK80 A						
108	360 020A 680 0	A	82	53	20.000 G=2,5	2,0
HSK100 A						
110	360 020A 610 0	A	81	53	20.000 G=2,5	2,9



HSK63 A 20 – 25 mm						
A	Part.No.	Form	L1	D1	Balanced	kg
110	360 025A 663 0	A	84	53	20.000 G=2,5	1,4
HSK80 A						
116	360 025A 680 0	A	90	53	20.000 G=2,5	2,0
HSK100 A						
118	360 025A 610 0	A	89	53	20.000 G=2,5	2,9




Collets with Pin-Lock

Ultra Chuck Collet for tools with internal coolant.
Collets are supplied with 3 pins and assembly tools.

Collet Ultra Chuck 2016 – 20 mm			
D	Coolant	Part.No.	kg
16	Central	166 2016 OLO T	0,19
20	Central	166 2020 OLO T	0,15

Collet Ultra Chuck 2520 – 25 mm			
D	Coolant	Part.No.	kg
20	Central	166 2520 OLO T	0,30
25	Central	166 2525 OLO T	0,23

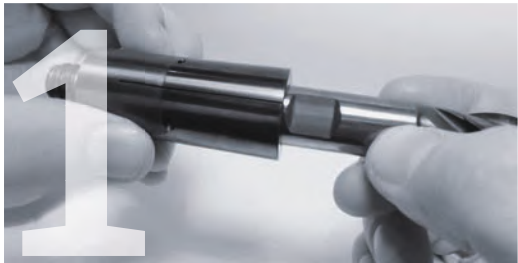

Positioning tool
Remove the length setting screw, than position the Weldon-clamping surface on the side of the bore. Now insert the tool into the collet until the Weldon-clamping surface lies in the range of the bore.



Positioning pin
The locking-pin has to be inserted with the help of the pin punch into the bore of the collet up to the block.
Caution: The Pin must not stick out of the collet.



Free from backlash
With the assembly tool the length stop screw has to be screwed, so that the cutting tool is free of backlash.
Caution: Mounting without axial pressure. The collet with the secured tool can now be placed into the APC chuck (see APC operation manual).

Accessories

Standard- Key	Part.No.
with marking approx. 12 Nm	139 0000 906 0



Torque Key	Part.No.
corr. ISO 6789 at 12 Nm	139 0012 900 0
corr. ISO 6789 at 14 Nm	139 0014 900 0
Spare bit 1/4"	139 0000 901 4



Peripheral-Cap Ultra Chuck 20/25		
Cool-Jet	AF	Part.No.
4 x 10° (1 piece)	50	161 2025 000 1
6 x 20° (1 piece)	50	161 2025 000 2
6 x 30° (1 piece)	50	161 2025 000 3
Set (3 pieces)	50	161 2025 S00 0



Spare part	Part.No.
Worm Set Ultra	139 0000 004 0



Spare Pins for Pin-Lock		
DxL	for	Part.No.
Ø3x14 (3 pieces)	UC 20 Ø16	139 3020 314 0
Ø4x20 (3 pieces)	UC 25 Ø20	139 3025 420 0
Ø4x16 (3 pieces)	UC 25 Ø25	139 3025 416 0



Balancing Screws

Balancing Screws- Set, incl. case, key, difference-table and 180 pieces of fine-balancing-screws

Universal use, fits in all brands. 9 different screws in fine graduation. 20 screws each size, including Torx key. Different colours for visual idendification. Precise balancing together with the clamped tool. Easy handling with Torx. Supplied with Torx ISR15 screwdriver. No need for screw locking. The balancing machine gives position and weight. Multiple use.

Typ	Part.No.
M6x4,0-8,0	139 4006 000 0



Balancing Screws			
Typ	Part.No.	Amount	Colour
M6x4,0	139 4006 040 0	20	black
M6x4,5	139 4006 045 0	20	silver
M6x5,0	139 4006 050 0	20	red
M6x5,2	139 4006 052 0	20	yellow
M6x6,0	139 4006 060 0	20	black
M6x6,5	139 4006 065 0	20	silver
M6x7,0	139 4006 070 0	20	red
M6x7,2	139 4006 072 0	20	yellow
M6x8,0	139 4006 080 0	20	black

Accessories HSK

Coolant tubes DIN 69893 (HSK)	Part. No
Coolant tube HSK-A50	139 0002 650 0
Coolant tube HSK-A63	139 0002 663 0
Coolant tube HSK-A80	139 0002 680 0
Coolant tube HSK-A100	139 0002 610 0



Key with T-handle	Part. No
for Coolant tube HSK-A50	139 0020 650 0
for Coolant tube HSK-A63	139 0020 663 0
für for Coolant tube HSK-A80	139 0020 680 0
for Coolant tuber HSK-A100	139 0020 610 0



Mountingsystem

flexible, vertical/horizontal, locked



Mouting System- Base Unit	Part.No.
	730 1000 000 0



Adaptor	Part.No.
ISO 7388-1 + ISO7388-2	
SK30 + BT30	730 1000 230 0
SK40 + BT40	730 1000 240 0
SK50 + BT50	730 1000 250 0
DIN 69893	
HSK50	730 1000 650 0
HSK63	730 1000 663 0
HSK80	730 1000 680 0
HSK100	730 1000 610 0
ISO 26623-1	
PSC50	730 1000 9C5 0
PSC63	730 1000 9C6 0
PSC80	730 1000 9C8 0



Handling APC and Ultra

The Albrecht chuck is high precision toolholder with clamping gear. Its unique design provides a very high clamping force, run-out accuracy as well as a positive dampening feature for machining (milling, drilling, reaming, tapping, heavy-duty cutting, finish milling, HSC operations). The Chuck uses a special collet to clamp the cutting tool and is operated by a hex key on the periphery.




Cleaning, insert the Collet

Before each use, clean the inner cone chuck free cloth and chuck cone cleaner. Attention, do not work with compressed air during the cleaning process, as otherwise dissolved dirt particles can get into parts of the gearbox.



For maximum clamping forces, the bore, the tool shank, the cone of the clamping sleeve and the inner cone chuck must be degreased each time the tool is changed.

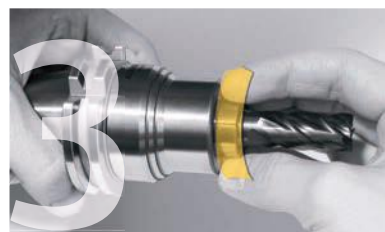

Insert the cleaned and undamaged tool shank into the clamping sleeve, observing the minimum clamping depth, see page 73. Screw the clamping sleeve with tool into the chuck manually until the clamping sleeve touches the cone.



Clamping

The chucking procedure starts by engaging the screw on the side of the chuck and rotating the hex key clockwise. Max. clamping torque see product-marking. Use only Albrecht keys, see page 41. Put in the hex key as far as possible. Hex tool surface is to be inspected about damages!



Match the two arrowheads when clamping.



Releasing

Open the Spannfutter by turning the hex key counter-clockwise. Note: when opening the chuck you must overcome two resistance points. First, you will overcome the friction torque and then the collet is loosened. Then open until the tool can be taken out, respectively the collet can be unscrewed manually.



Length adjustment

A length stop screw is located in the collet and can be adjusted with a hex key (size 5/32 hex). For operation from the back through the chuck with taper shank a bolt with a through hole is necessary (form AD). The range of the length adjustment: 11mm.

Technical Data Typ	Clamping-Diameter, Ø-Tolerance h6, Ø mm / Ø inch		Min. Clampingdepth	Max. Clampingdepth
14/20	2 - 5	1/8" - 3/16"	17	66
	6	1/4"	22	40
	7 - 10	5/16" - 3/8"	30	50
	11 - 15	7/16" - 9/16"	38	50
20	16 - 20	5/8" - 3/4"	38	48,5
25	12,7	1/2"	47	54,5
	16 - 32	5/8" - 1 1/4"	47	60

Balancing grade

Each Albrecht Chuck is fine-balanced without collet and tool according to the laser marking. Higher balancing quality and rpm on request. The use of shanks with recesses influences the balancing grade and run-out accuracy of the whole system.

Maintenance

The Chuck is maintenance free over his lifetime. Clean chuck (especially the inner cone) and collet including thread after usage with a solvent base cleaner. According to contamination the cleaning cycles have to be adjusted. After cleaning, apply a thin coat of anticorrosive.

Repairs

In order to guarantee the precision of the tool, any chuck in need of repair has to be sent to the manufacturer or to an authorized national agent only. We recommend checking the chuck and the collet for run-out deviations and gripping torque periodic, especially after a tool break or crash.